

CoolMOS™ 1) Power MOSFET

V_{DSS} = 600 V
I_{D25} = 85 A
$R_{DS(on)\ max}$ = 36 mΩ

Low R_{DSon}, high V_{DSS}
Superjunction MOSFET



TO-264

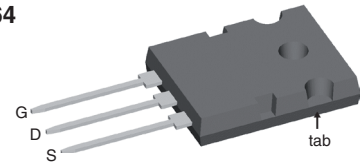

E72873

MOSFET					
Symbol	**Conditions**			**Maximum Ratings**	
V_{DSS}	T_{VJ} = 25°C			600	V
V_{GS}				± 20	V
I_{D25}	T_C = 25°C			85	A
I_{D100}	T_C = 100°C			55	A
E_{AS}	single pulse	I_D = 10 A; T_C = 25°C		1800	mJ
E_{AR}	repetitive	I_D = 20 A; T_C = 25°C		1	mJ
dV/dt	MOSFET dV/dt ruggedness V_{DS} = 0...480 V			50	V/ns

Symbol	**Conditions**		**Characteristic Values** (T_{VJ} = 25°C, unless otherwise specified)			
			min.	**typ.**	**max.**	
R_{DSon}	V_{GS} = 10 V; I_D = I_{D100} ①			30	36	mΩ
$V_{GS(th)}$	V_{DS} = V_{GS}; I_D = 5.4 mA		2		4	V
I_{DSS}	V_{DS} = V_{DSS}; V_{GS} = 0 V	T_{VJ} = 25°C			50	µA
		T_{VJ} = 125°C			500	µA
I_{GSS}	V_{GS} = ± 20 V; V_{DS} = 0 V				±200	nA
C_{iss}	V_{GS} = 0 V; V_{DS} = 25 V			13.6		nF
C_{oss}	f = 1 MHz			4.4		nF
C_{rss}				290		pF
Q_g	V_{GS} = 0 to 10 V; V_{DS} = 350 V; I_D = 85 A			500	640	nC
Q_{gs}				50		nC
Q_{gd}				240		nC
$t_{d(on)}$	V_{GS} = 13 V; V_{DS} = 380 V			20		ns
t_r	I_D = 85 A; R_G = 1.0 Ω			27		ns
$t_{d(off)}$				110		ns
t_f				10		ns
R_{thJC}					0.18	K/W

① Pulse test, t ≤ 300 µs, duty cycle d ≤ 2%

Features

- 3rd generation CoolMOS™ 1) power MOSFET
  - high blocking capability
  - lowest resistance
  - avalanche rated for unclamped inductive switching (UIS)
  - low thermal resistance due to reduced chip thickness

Applications

- Switched mode power supplies (SMPS)
- Uninterruptible power supplies (UPS)
- Power factor correction (PFC)
- Welding
- Inductive heating

1) CoolMOS™ is a trademark of Infineon Technologies AG.

IXYS reserves the right to change limits, test conditions and dimensions.

© 2010 IXYS All rights reserved

Source-Drain Diode


Symbol	Conditions	Characteristic Values (T_{VJ} = 25°C, unless otherwise specified) min.	typ.	max.	
I_S	V_{GS} = 0 V			85	A
I_{SM}				250	A
V_{SD}	I_F = 85 A; V_{GS} = 0 V			1.2	V
t_{rr}	I_F = 85 A; -di_F/dt = 200 A/µs; V_R = 350 V		580		ns
Q_{RM}			46		µC
I_{RM}			140		A


Component

Symbol	Conditions	Maximum Ratings	
T_{VJ}	operating	-55...+150	°C
T_{stg}		-55...+150	°C
M_d	mounting torque	0.8 ... 1.2	Nm

Symbol	Conditions	Characteristic Values min.	typ.	max.	
R_{thCH}	with heatsink compound		0.15		K/W
Weight			10		g

TO-264 Outline

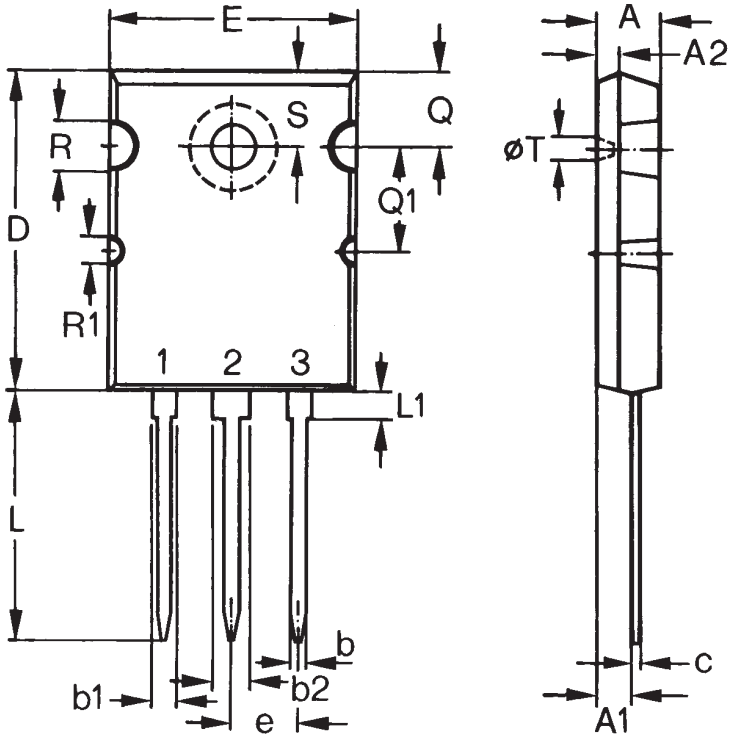

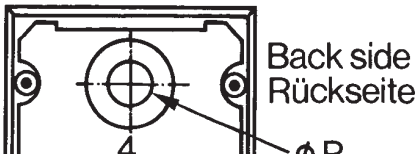

SYM	INCHES MIN	INCHES MAX	MILLIMETERS MIN	MILLIMETERS MAX
A	.185	.209	4.70	5.31
A1	.102	.118	2.59	3.00
b	.037	.055	0.94	1.40
b1	.087	.102	2.21	2.59
b2	.110	.126	2.79	3.20
C	.017	.029	0.43	0.74
D	1.007	1.047	25.58	26.59
E	.760	.799	19.30	20.29
e	.215 BSC		5.46 BSC	
L	.193	.201	4.90	5.10
L1	.088	.096	2.24	2.44
L2	.075	.083	1.90	2.10
L3	.000	.004	0.00	0.10
∅P	.122	.138	3.10	3.51
Q	.240	.256	6.10	6.50
Q1	.330	.346	8.38	8.79
∅R	.155	.187	3.94	4.75
∅R1	.085	.093	2.16	2.36
S	.243	.253	6.17	6.43

NOTE 1. This drawing meets all dimension requirement of JEDEC outline TO-264AA except L, L1, L2, L3.
2. All metal surface are solder plated except trimmed area.

IXYS reserves the right to change limits, test conditions and dimensions.

© 2010 IXYS All rights reserved

Fig. 1. Output Characteristics @ 25 Deg. C

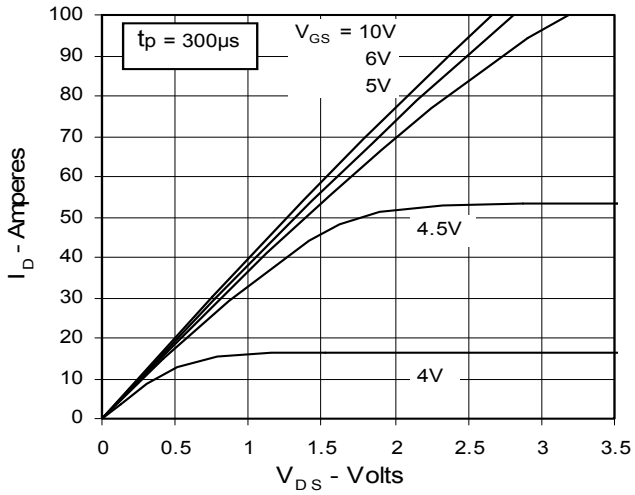


Fig. 2. Extended Output Characteristics @ 25 deg. C

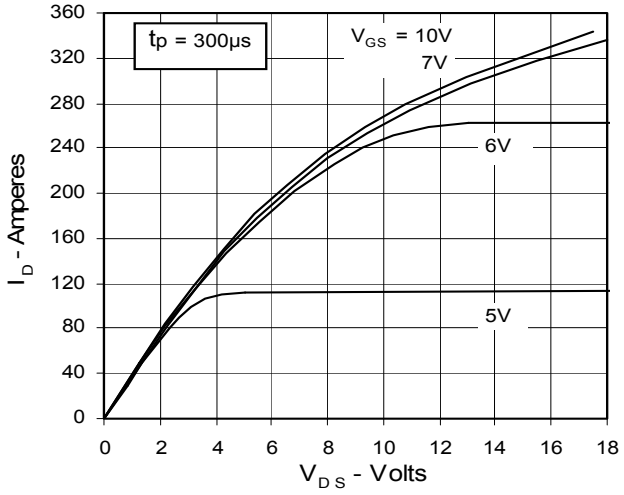


Fig. 3. Output Characteristics @ 125 Deg. C

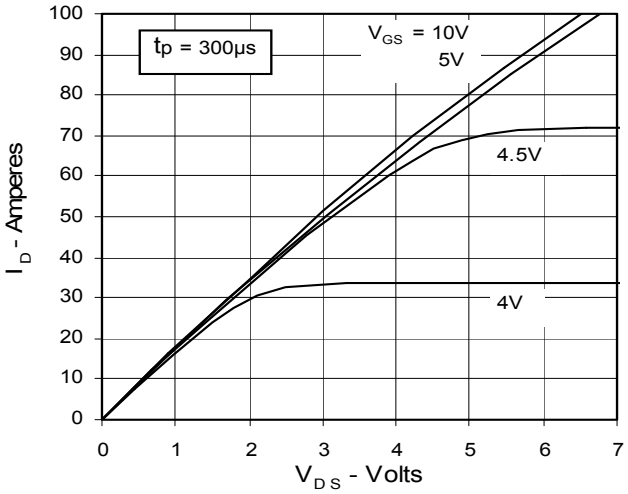


Fig. 4. $R_{DS(on)}$ Normalized to I_{D100} Value vs. Junction Temperature

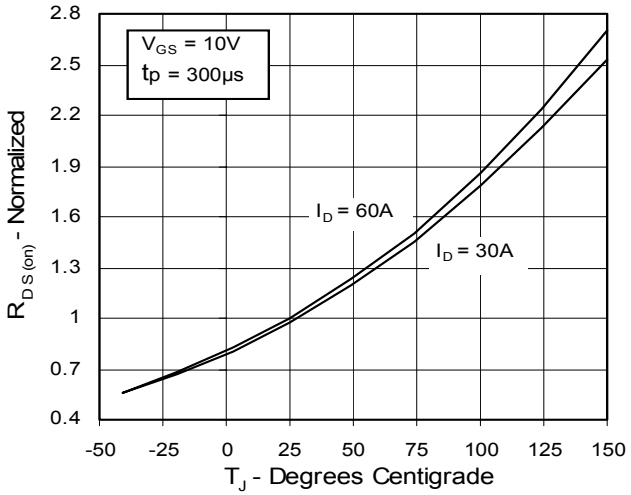


Fig. 5. $R_{DS(on)}$ Normalized to I_{D100} Value vs. I_D


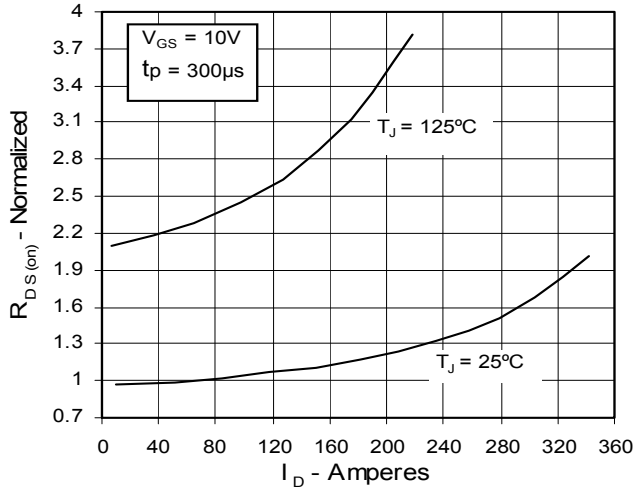


Fig. 6. Drain Current vs. Case Temperature

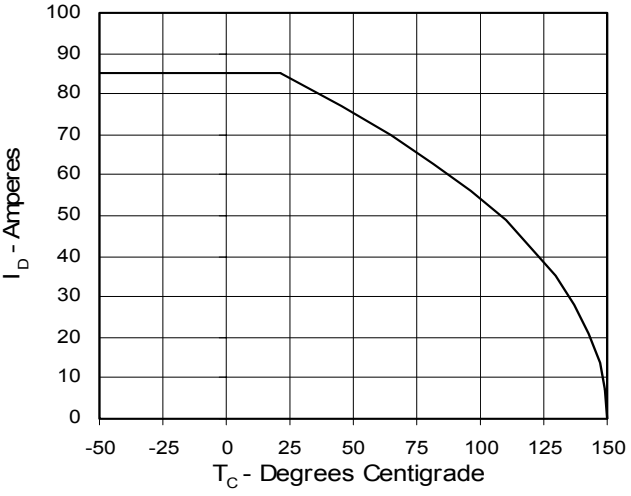

IXYS reserves the right to change limits, test conditions and dimensions.

© 2010 IXYS All rights reserved

Fig. 7. Input Admittance

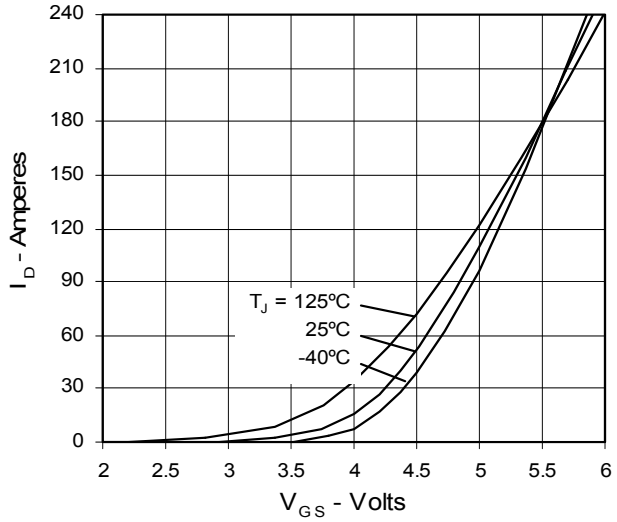


Fig. 8. Transconductance

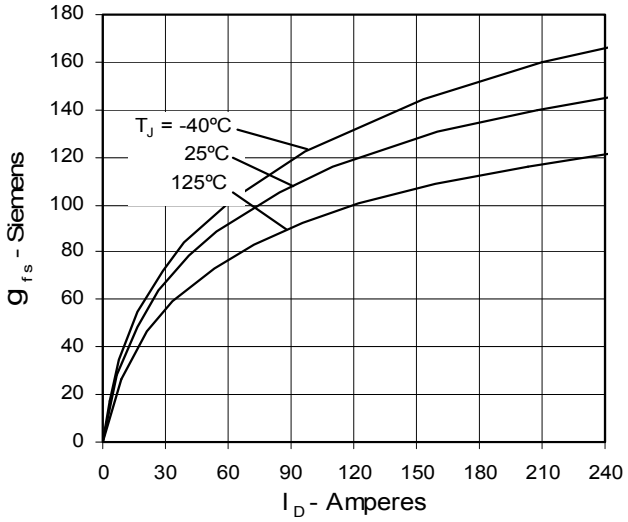


Fig. 9. Source Current vs. Source-To-Drain Voltage

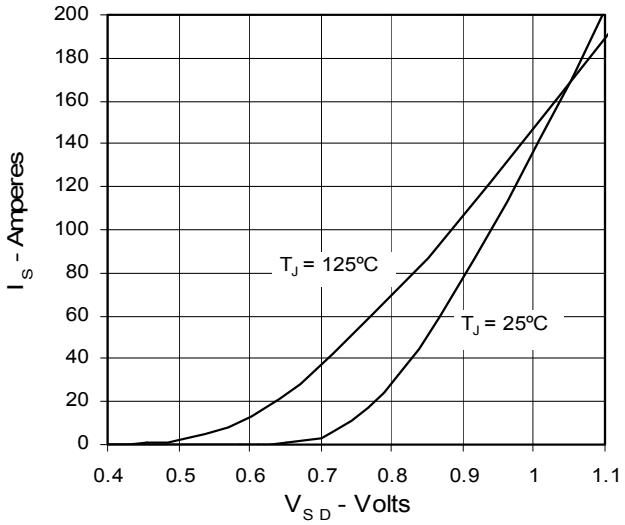


Fig. 10. Gate Charge

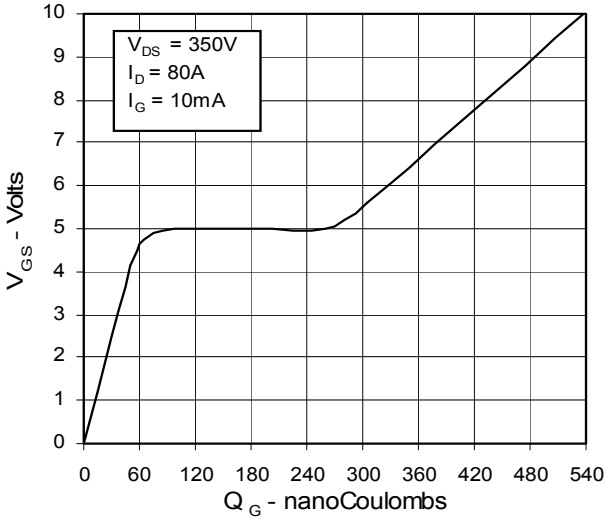


Fig. 11. Capacitance


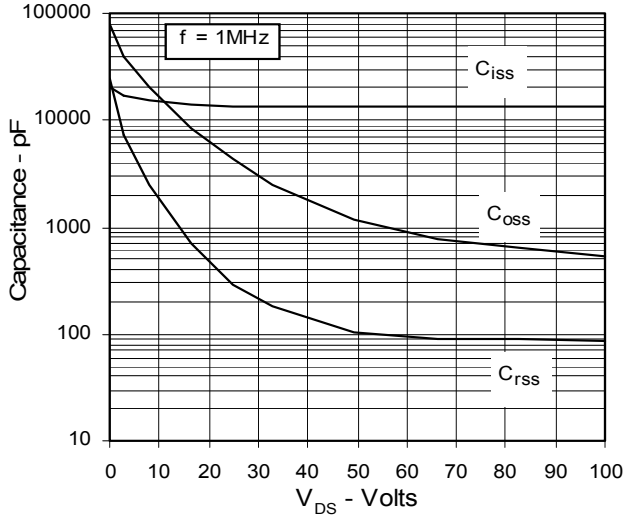


Fig. 12. Maximum Transient Thermal Resistance



© 2010 IXYS All rights reserved

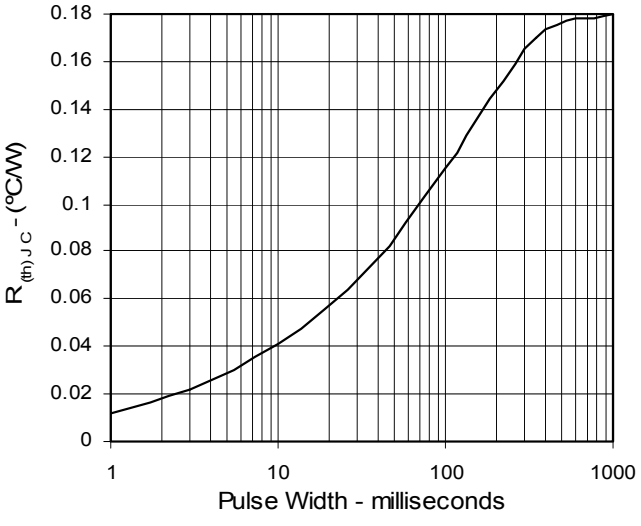

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications.Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.