


## CAN BUS TRANSCEIVER

- L9615 MEETS ISO/DIS 11898 UP TO 500KBAUD
- TRANSMITTER
  - GENERATION OF DIFFERENTIAL OUTPUT SIGNALS
  - SHORT CIRCUIT PROTECTED FROM -5V TO 36V, DETECTION & SHUTDOWN
  - SLOPE CONTROL TO REDUCE RFI AND EMI
  - TWO STATES ADJUSTABLE SLOPE CONTROL ( $\leq 500\text{KBAUD}$ / $\leq 125\text{KBAUD}$ )
- RECEIVER
  - DIFFERENTIAL INPUT WITH HIGH INTERFERENCE SUPPRESSION
  - COMMON MODE INPUT VOLTAGE RANGE ( $V_{\text{COM}}$ ) FROM -2V TO  $V_{\text{S}}+3\text{V}$
- PACKAGE: SO 8

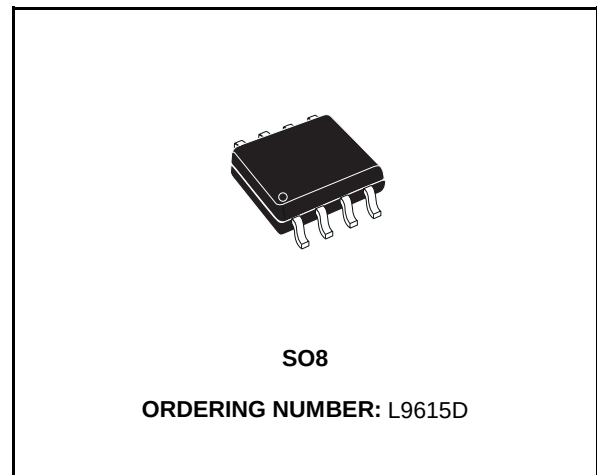


### DESCRIPTION

The L9615 is a bidirectional transceiver for signal

conditioning and processing in connection with a CAN controller. Data rates of up to 500KBAUD are supported using either shielded or non-shielded pair of lines.

### BLOCK DIAGRAM

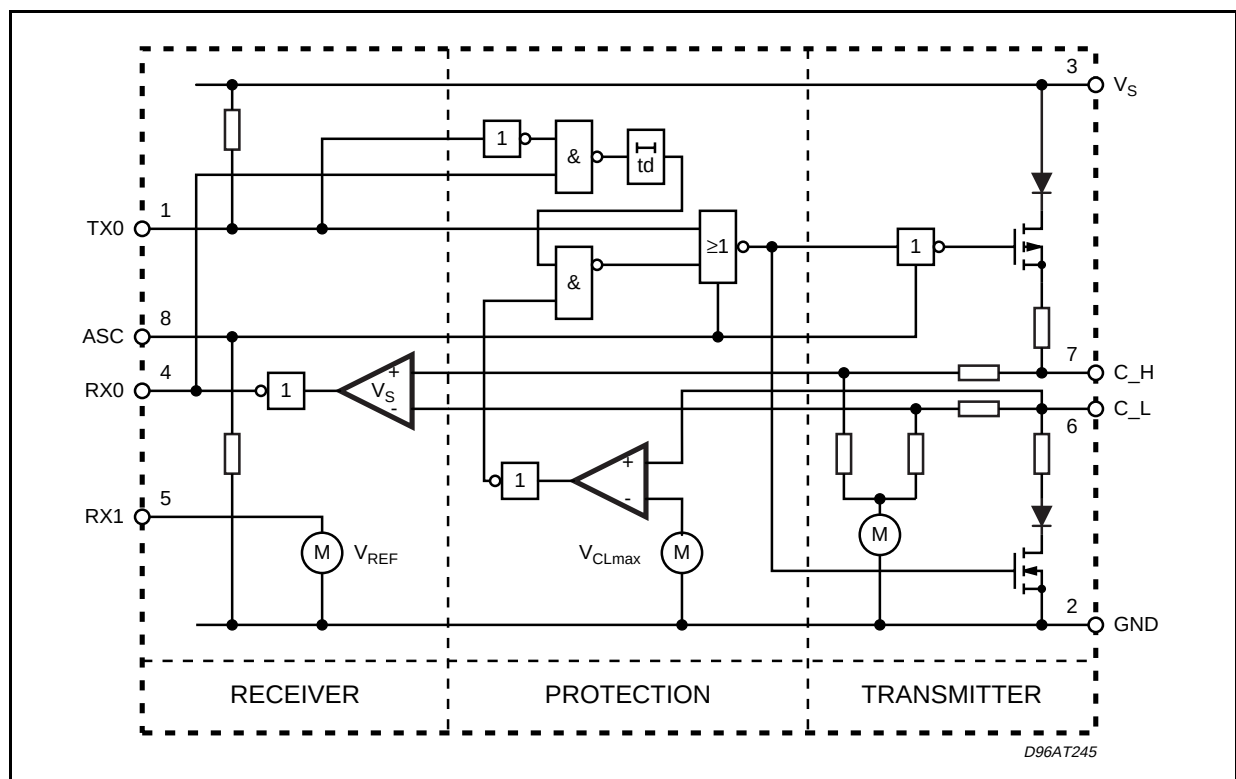


ABSOLUTE MAXIMUM RATINGS

| Symbol                  | Parameter                                                                                              | Value                  | Unit |
|-------------------------|--------------------------------------------------------------------------------------------------------|------------------------|------|
| $V_S$                   | Supply Voltage                                                                                         | -0.3 to 7              | V    |
| $V_{C\_H}$ , $V_{C\_L}$ | Bus Voltage at C_H, C_L (VS 0 to 5.5V)                                                                 | -5 to 36               | V    |
| $I_{C\_H}$ , $I_{C\_L}$ | Off State Leakage Current at C_H, C_L ( VS =0 to 5.5V, $V_{C\_H}$ = -5 to 36V, $V_{C\_L}$ = -5 to 36 ) | -3 to 5                | mA   |
| $V_{DC}$                | DC Voltage at TXO, ASC (VS 0 to 5.5V)                                                                  | GND -0.3 to $V_S$ +0.3 | V    |
| $I_{RXO}$               | Output Current at RXO (VS 0 to 5.5V)                                                                   | -0.3 to 1              | mA   |
| $T_{stg}$ , $T_J$       | Storage and Junction Temperature Range                                                                 | -40 to 150             | °C   |
| $T_{op}$                | Operating Temperature Range                                                                            | -40 to 110             | °C   |

All voltages, except bus voltage, are defined with respect to pin 2  
Positive currents flow into the IC.

PIN CONNECTION

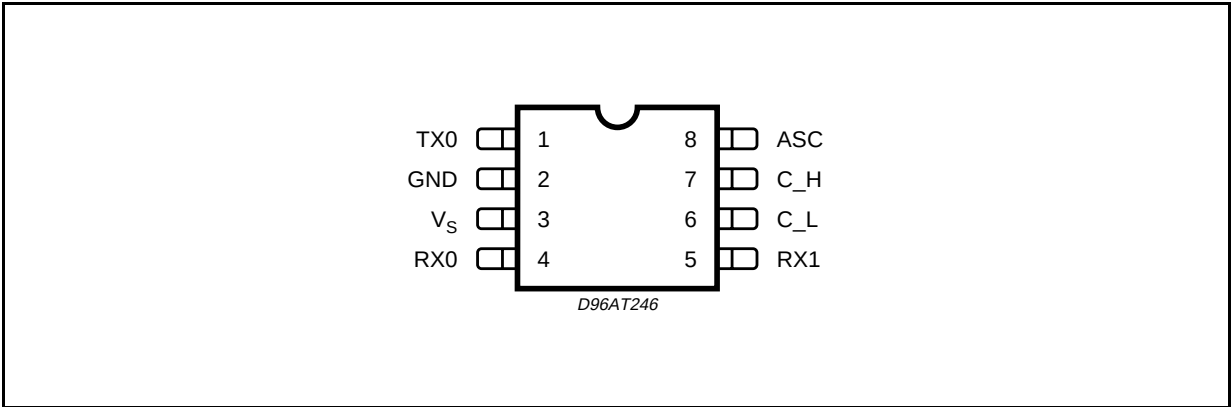

THERMAL DATA

| Symbol | Parameter | Value | Unit |
|--------|-----------|-------|------|
|        |           |       |      |
|        |           |       |      |

PIN FUNCTIONS

| N. | Name  | Function                 |
|----|-------|--------------------------|
| 1  | TXO   | Transmitter Input        |
| 2  | GND   | Ground                   |
| 3  | $V_S$ | Supply Voltage           |
| 4  | R XO  | Receive Output           |
| 5  | R X1  | Reference Voltage        |
| 6  | C_L   | Low Side Bus Output      |
| 7  | C_H   | High Side Bus Output     |
| 8  | ASC   | Adjustable Slope Control |

**ELECTRICAL CHARACTERISTICS** ( $T_{OP} = -40$  to  $110^{\circ}\text{C}$ ;  $V_S = 4.5$  to  $5.5\text{V}$ ; Dominant:  $V_{TXO} = \text{GND}$ ; Recessive:  $V_{TXO} = V_S$ ; All voltages, except bus voltage, are defined with respect to pin 2. Positive currents flow into the IC unless otherwise specified.)


| Symbol                                                                                | Parameter                                                                                                                      | Test Condition                                                                                                                       | Min.                | Typ.               | Max.                | Unit |
|---------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|---------------------|--------------------|---------------------|------|
| V <sub>S</sub>                                                                        | Supply Voltage                                                                                                                 |                                                                                                                                      | 4.5                 | 5                  | 5.5                 | V    |
| I <sub>S</sub>                                                                        | Supply Current                                                                                                                 | Dominant                                                                                                                             |                     |                    | 80                  | mA   |
|                                                                                       |                                                                                                                                | Recessive                                                                                                                            |                     |                    | 20                  | mA   |
| TRANSMITTER SECTION (R <sub>A</sub> = 60Ω between C <sub>H</sub> and C <sub>L</sub> ) |                                                                                                                                |                                                                                                                                      |                     |                    |                     |      |
| C <sub>TXO</sub>                                                                      | TXO Input Capacitance                                                                                                          | 0V < V <sub>TXO</sub> < V <sub>S</sub>                                                                                               |                     | 25                 |                     | pF   |
| V <sub>TXO</sub>                                                                      | TXO High Level Input Voltage                                                                                                   |                                                                                                                                      | 0.7 V <sub>S</sub>  |                    | V <sub>S</sub>      |      |
|                                                                                       | TXO Low Level Input Voltage                                                                                                    |                                                                                                                                      | 0                   |                    | 0.3 V <sub>S</sub>  |      |
| I <sub>TXO</sub>                                                                      | TXO High Level Input Current                                                                                                   | V <sub>TXO</sub> = V <sub>S</sub>                                                                                                    | -2                  | 0                  | 2                   | μA   |
|                                                                                       | TXO Low Level Input Current                                                                                                    | V <sub>TXO</sub> = GND                                                                                                               | -275                | 0                  | -25                 | μA   |
| C <sub>ASC</sub>                                                                      | ASC Input Capacitance                                                                                                          | 0V < V <sub>ASC</sub> < V <sub>S</sub>                                                                                               |                     | 25                 |                     | pF   |
| V <sub>ASC</sub>                                                                      | ASC Input Voltage for High Speed                                                                                               |                                                                                                                                      | 0                   |                    | 0.1 V <sub>S</sub>  |      |
|                                                                                       | ASC Input Voltage for Low Speed                                                                                                |                                                                                                                                      | 0.9 V <sub>S</sub>  |                    | V <sub>S</sub>      |      |
| I <sub>ASC</sub>                                                                      | ASC Input Current                                                                                                              | V <sub>ASC</sub> = V <sub>S</sub>                                                                                                    | 25                  |                    | 275                 | μA   |
|                                                                                       |                                                                                                                                | V <sub>ASC</sub> = 0V                                                                                                                | -2                  | 0                  | 2                   | μA   |
| V <sub>C<sub>H</sub></sub> , V <sub>C<sub>L</sub></sub>                               | Bus Voltage Recessive                                                                                                          | Recessive                                                                                                                            | 0.4 V <sub>S</sub>  | 0.5 V <sub>S</sub> | 0.6 V <sub>S</sub>  |      |
| I <sub>C<sub>H</sub></sub> , I <sub>C<sub>L</sub></sub>                               | Leakage Current Recessive                                                                                                      | V <sub>C<sub>L</sub></sub> = V <sub>C<sub>H</sub></sub> = -2 to 7V                                                                   | -0.7                |                    | 0.7                 | mA   |
|                                                                                       |                                                                                                                                | V <sub>C<sub>L</sub></sub> = V <sub>C<sub>H</sub></sub> = 1 to 4V                                                                    | -0.3                |                    | 0.3                 | mA   |
| R <sub>IN</sub> (C <sub>H</sub> , C <sub>L</sub> )                                    | Input Resistance                                                                                                               | Recessive                                                                                                                            | 5                   |                    | 50                  | KΩ   |
| R <sub>DIFF</sub> (C <sub>H</sub> , C <sub>L</sub> )                                  | Differential Input Resistance                                                                                                  | Recessive                                                                                                                            | 10                  |                    | 100                 | KΩ   |
| V <sub>DIFF</sub> = V <sub>C<sub>H</sub></sub> - V <sub>C<sub>L</sub></sub>           | Differential Output Voltage                                                                                                    | Dominant, R <sub>A</sub>                                                                                                             | 1.5                 |                    | 3                   | V    |
| V <sub>DIFF</sub> = V <sub>C<sub>H</sub></sub> - V <sub>C<sub>L</sub></sub>           | Differential Output Voltage                                                                                                    | Recessive                                                                                                                            | -500                | 0                  | 50                  | mV   |
| t <sub>d</sub>                                                                        | Short Circuit Detection Time<br>C <sub>H</sub> to C <sub>L</sub> ; C <sub>H</sub> to B                                         | R <sub>CS</sub> < 1Ω                                                                                                                 | 1                   | 5                  | 10                  | μs   |
| I <sub>A</sub>                                                                        | Supply Current in Case of Short<br>Circuit, C <sub>H</sub> to C <sub>L</sub> , C <sub>H</sub> to B<br>(time = t <sub>d</sub> ) |                                                                                                                                      |                     | 150                |                     | mA   |
| V <sub>C<sub>L</sub>max</sub>                                                         | Overvoltage Protection<br>Threshold on C <sub>L</sub>                                                                          |                                                                                                                                      | 7                   | 8                  | 10                  | V    |
| RECEIVE SECTION                                                                       |                                                                                                                                |                                                                                                                                      |                     |                    |                     |      |
| V <sub>RXO</sub>                                                                      | RXO High Level Output Voltage                                                                                                  | V <sub>DIFF</sub> < 0.5V; I <sub>RXO</sub> = 0.3mA;<br>V <sub>C<sub>H</sub></sub> = -2 to 7V; V <sub>C<sub>L</sub></sub> = -2 to 7V; | 0.9 V <sub>S</sub>  |                    | V <sub>S</sub>      | V    |
|                                                                                       | RXO Low Level Output Voltage                                                                                                   | V <sub>DIFF</sub> > 0.9V; I <sub>RXO</sub> = 1mA;<br>V <sub>C<sub>H</sub></sub> = -2 to 7V; V <sub>C<sub>L</sub></sub> = -2 to 7V;   |                     |                    | 0.5                 | V    |
| V <sub>S</sub> =<br>V <sub>C<sub>H</sub></sub> - V <sub>C<sub>L</sub></sub>           | Input Signal Threshold                                                                                                         | V <sub>C<sub>H</sub></sub> = -2 to 7V; V <sub>C<sub>L</sub></sub> = -2 to 7V;                                                        | 500                 | 700                | 900                 | mV   |
| V <sub>COM</sub> = (V <sub>C<sub>H</sub></sub><br>+ V <sub>C<sub>L</sub></sub> )/2    | Input Common Mode Voltage<br>Range                                                                                             |                                                                                                                                      | -2                  |                    | 7                   | V    |
| V <sub>HYS</sub>                                                                      | Differential Input Hysteresis                                                                                                  |                                                                                                                                      |                     | 150                |                     | mV   |
| REFERENCE OUTPUT                                                                      |                                                                                                                                |                                                                                                                                      |                     |                    |                     |      |
| V <sub>RX1</sub>                                                                      | Reference Voltage                                                                                                              | I <sub>RX1</sub> = 0                                                                                                                 | 0.45 V <sub>S</sub> | 0.5 V <sub>S</sub> | 0.55 V <sub>S</sub> | V    |
| R <sub>RX1</sub>                                                                      | Output Resistance                                                                                                              |                                                                                                                                      | 2                   |                    | 9                   | KΩ   |

The L9615 is used as an interface between a CAN controller and the physical bus. The device provides transmitting capability to the CAN controller.


Pin ASC makes it possible to select two different

The ASC pin is tied to GND for normal operation at  $\leq 500\text{kBaud}$ . For slower speed operation at  $\leq 125\text{kBaud}$  the rise and fall slope of the bus output can be decreased to reduce EMI by connecting the ASC pin to  $V_s$ .

## TIMING DIAGRAM

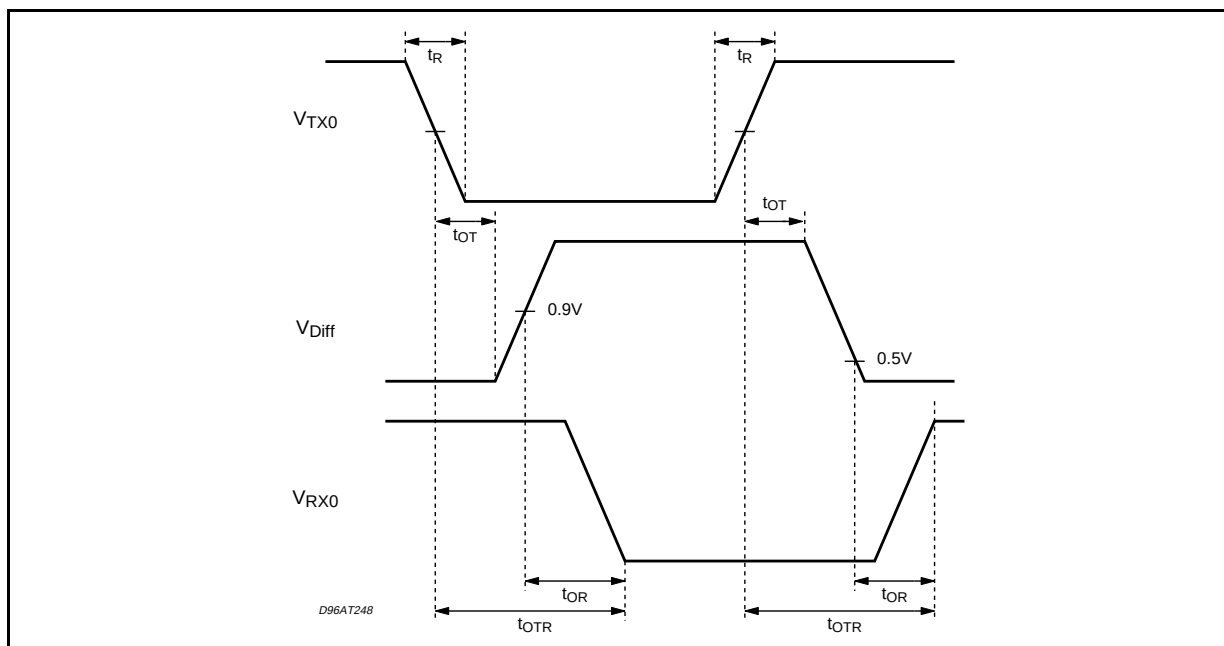

## EMC PERFORMANCE (RECEIVER)

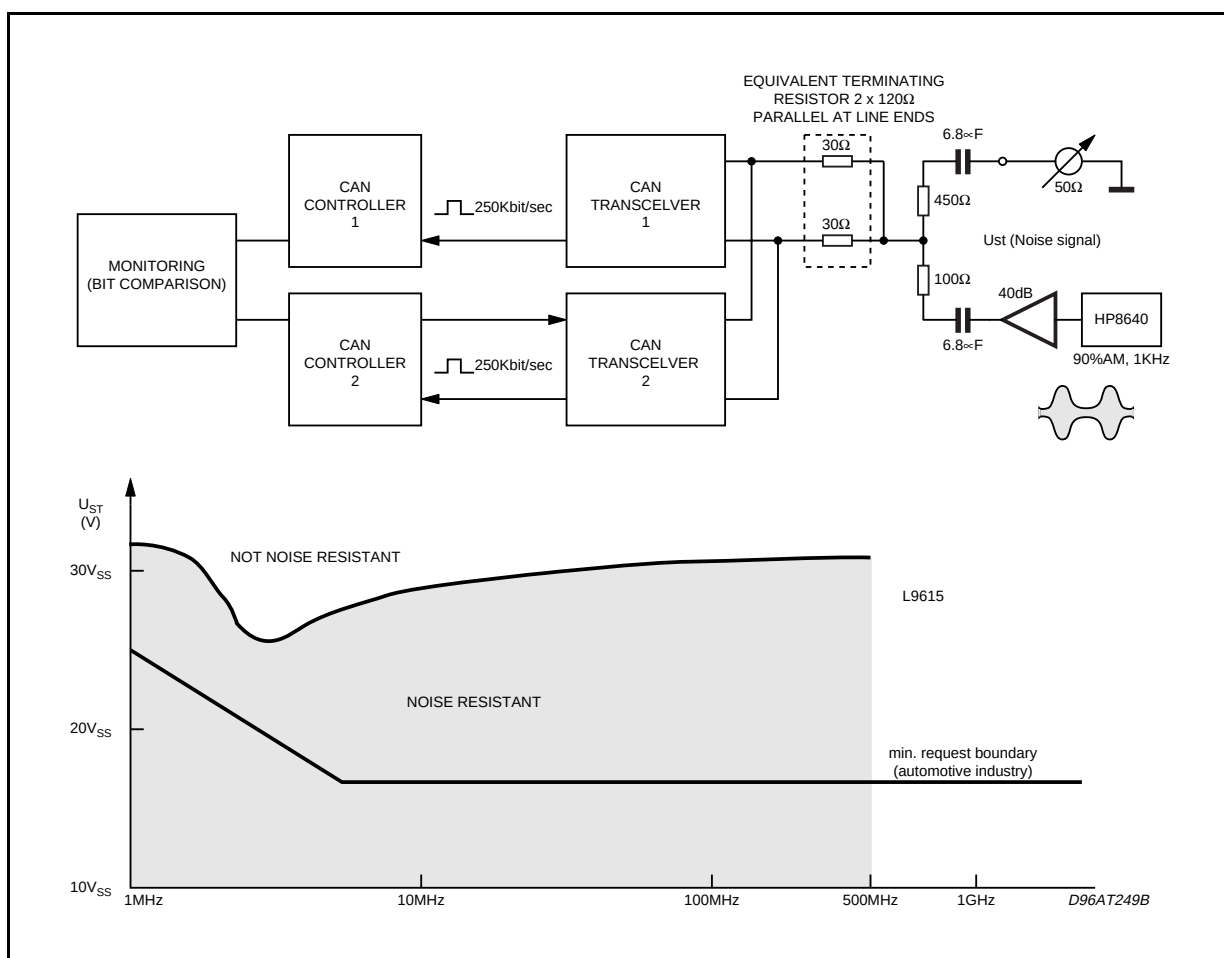





| DIM.  | mm         |      |      | inch  |       |       |
|-------|------------|------|------|-------|-------|-------|
|       | MIN.       | TYP. | MAX. | MIN.  | TYP.  | MAX.  |
| A     |            |      | 1.75 |       |       | 0.069 |
| a1    | 0.1        |      | 0.25 | 0.004 |       | 0.010 |
| a2    |            |      | 1.65 |       |       | 0.065 |
| a3    | 0.65       |      | 0.85 | 0.026 |       | 0.033 |
| b     | 0.35       |      | 0.48 | 0.014 |       | 0.019 |
| b1    | 0.19       |      | 0.25 | 0.007 |       | 0.010 |
| C     | 0.25       |      | 0.5  | 0.010 |       | 0.020 |
| c1    | 45° (typ.) |      |      |       |       |       |
| D (1) | 4.8        |      | 5.0  | 0.189 |       | 0.197 |
| E     | 5.8        |      | 6.2  | 0.228 |       | 0.244 |
| e     |            | 1.27 |      |       | 0.050 |       |
| e3    |            | 3.81 |      |       | 0.150 |       |
| F (1) | 3.8        |      | 4.0  | 0.15  |       | 0.157 |
| L     | 0.4        |      | 1.27 | 0.016 |       | 0.050 |
| M     |            |      | 0.6  |       |       | 0.024 |
| S     | 8° (max.)  |      |      |       |       |       |

(1) D and F do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.15mm (.006inch).

OUTLINE AND MECHANICAL DATA

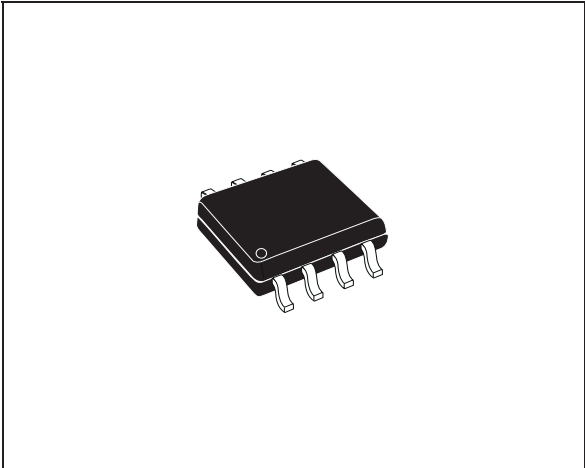

SO8

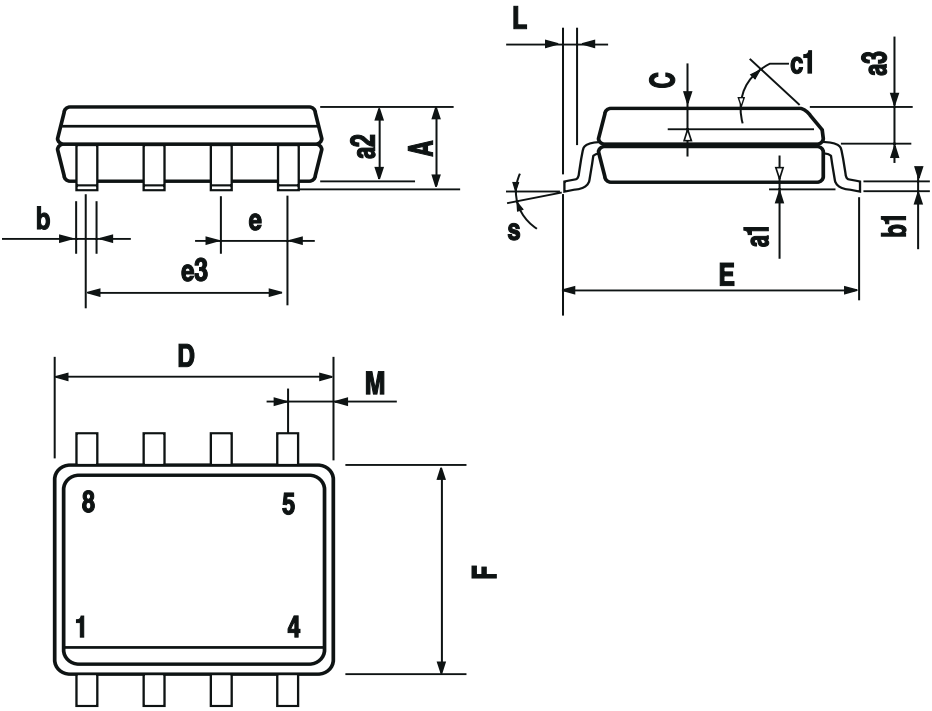

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**ST PRODUCTS ARE NOT DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE ST PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER'S SOLE RISK, EVEN IF ST HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY ST AS BEING INTENDED FOR "AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL" INDUSTRY DOMAINS ACCORDING TO ST PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2013 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)

