VND600SP


Double channel high-side solid state relay

Features

Type	$R_{DS(on)}$	I_{OUT}	V_{CC}
VND600SP	30mΩ(1)	25A(1)	36V

1. Per each channel.

- DC short circuit current: 25A
- CMOS compatible inputs
- Proportional load current sense
- Under-voltage and over-voltage shutdown
- Over-voltage clamp
- Thermal shutdown
- Current limitation
- Very low standby power consumption
- Protection against loss of ground and loss of V_{CC}
- Reverse battery protection



PowerSO-10

Description

The VND600SP is a monolithic device made using STMicroelectronics VIPower M0-3 technology. It is intended for driving resistive or inductive loads with one side connected to ground.

Active V_{CC} pin voltage clamp protects the device against low energy spikes (see ISO7637 transient compatibility table). This device has two channels in high-side configuration; each channel has an analog sense output on which the sensing current is proportional (according to a known ratio) to the corresponding load current.

Built-in thermal shutdown and outputs current limitation protect the chip from over-temperature and short circuit. Device turns-off in case of ground pin disconnection.

Obsolete Product(s) - Obsolete Product(s)

Table 1. Device summary

Package	Order codes	
	Tube	Tape and reel
PowerSO-10	VND600SP	VND600SP13TR

Contents

1 **Block diagram and pin description 5**

2 **Electrical specifications 6**

2.1 Absolute maximum ratings 6

2.2 Thermal data 7

2.3 Electrical characteristics 7

2.4 Electrical characteristics curves 14

3 **Application information 16**

3.1 GND protection network against reverse battery 16

3.1.1 Solution 1: a resistor in the ground line (RGND only) 16

3.1.2 Solution 2: a diode (D_{GND}) in the ground line 17

3.2 Load dump protection 17

3.3 MCU I/O protection 17

3.4 Maximum demagnetization energy (V_{CC} = 13.5V) 18

4 **Package and PCB thermal data 19**

4.1 PowerSO-10 thermal data 19

5 **Package and packing information 22**

5.1 ECOPACK® packages 22

5.2 PowerSO-10 mechanical data 22

5.3 PowerSO-10 packing information 24

6 **Revision history 25**

Obsolete Product(s) - Obsolete Product(s)

List of tables

Table 1. Device summary . . . 1
Table 2. Suggested connections for unused and not connected pins . . . 5
Table 3. Absolute maximum ratings . . . 6
Table 4. Thermal data . . . 7
Table 5. Power . . . 7
Table 6. Protections . . . 8
Table 7. V_{CC} - output diode . . . 8
Table 8. Current sense (9V ≤VCC ≤16V) . . . 9
Table 9. Logic inputs . . . 10
Table 10. Switching (V_{CC} = 13V) . . . 10
Table 11. Truth table . . . 10
Table 12. Electrical transient requirements . . . 11
Table 13. Thermal parameters . . . 21
Table 14. PowerSO-10 mechanical data . . . 23
Table 15. Document revision history . . . 25

Obsolete Product(s) - Obsolete Product(s)

List of figures

Figure 1. Block diagram . . . 5
Figure 2. Configuration diagram (top view) . . . 5
Figure 3. Current and voltage conventions . . . 6
Figure 4. Switching characteristics . . . 11
Figure 5. I_{OUT}/I_{SENSE} versus I_{OUT} . . . 12
Figure 6. Waveforms . . . 13
Figure 7. Off-state output current . . . 14
Figure 8. High level input current . . . 14
Figure 9. Input clamp voltage . . . 14
Figure 10. Turn-on voltage slope . . . 14
Figure 11. Over-voltage shutdown . . . 14
Figure 12. Turn-off voltage slope . . . 14
Figure 13. ILIM vs Tcase . . . 15
Figure 14. On-state resistance vs VCC . . . 15
Figure 15. Input high level . . . 15
Figure 16. Input hysteresis voltage . . . 15
Figure 17. On-state resistance vs Tcase . . . 15
Figure 18. Input low level . . . 15
Figure 19. Application schematic . . . 16
Figure 20. Maximum turn-off current versus load inductance . . . 18
Figure 21. PowerSO-10 PC board . . . 19
Figure 22. Rthj-amb Vs PCB copper area in open box free air condition . . . 19
Figure 23. Thermal impedance junction ambient single pulse . . . 20
Figure 24. Thermal fitting model of a quad channel HSD in PowerSO-10 . . . 20
Figure 25. PowerSO-10 package dimensions . . . 22
Figure 26. PowerSO-10 suggested pad layout . . . 24
Figure 27. PowerSO-10 tube shipment (no suffix) . . . 24
Figure 28. PowerSO-10 tape and reel shipment (suffix “TR”) . . . 24

Obsolete Product(s) - Obsolete Product(s)

1 Block diagram and pin description

Figure 1. Block diagram

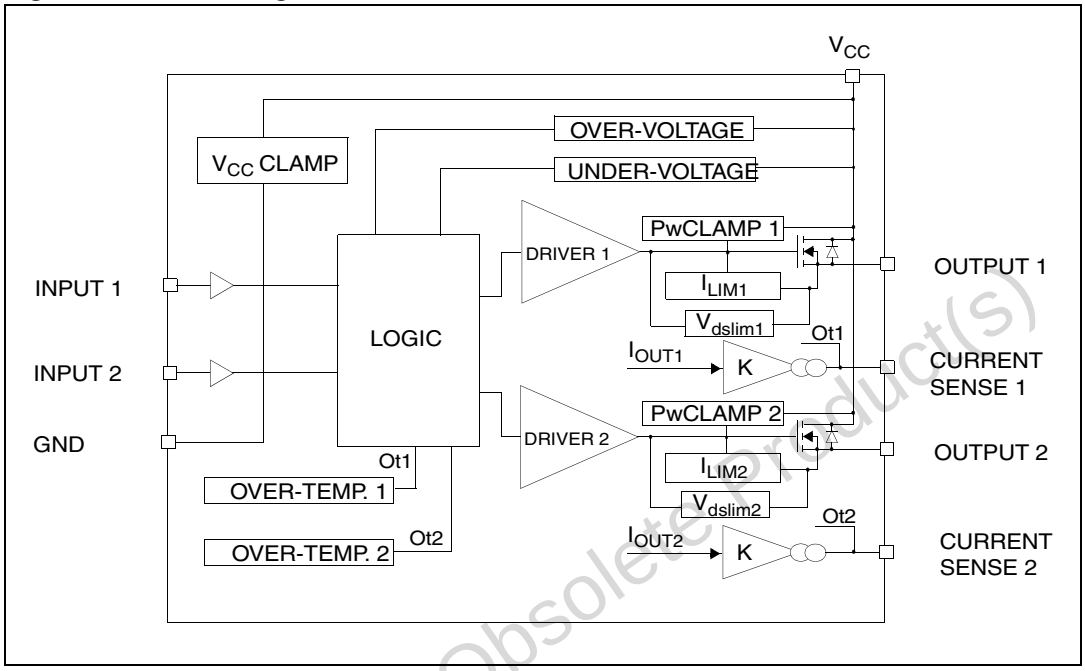


Figure 2. Configuration diagram (top view)

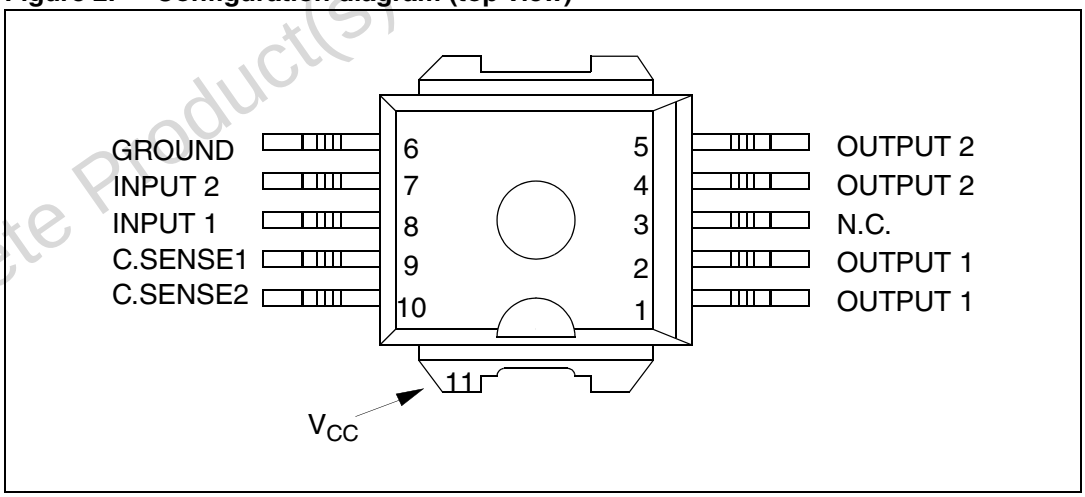



Table 2. Suggested connections for unused and not connected pins

Connection / pin	Current sense	N.C.	Output	Input
Floating		X	X	X
To ground	Through 10KΩ resistor	X		Through 10KΩ resistor

Obsolete Product(s) - Obsolete Product(s)

2 Electrical specifications

Figure 3. Current and voltage conventions

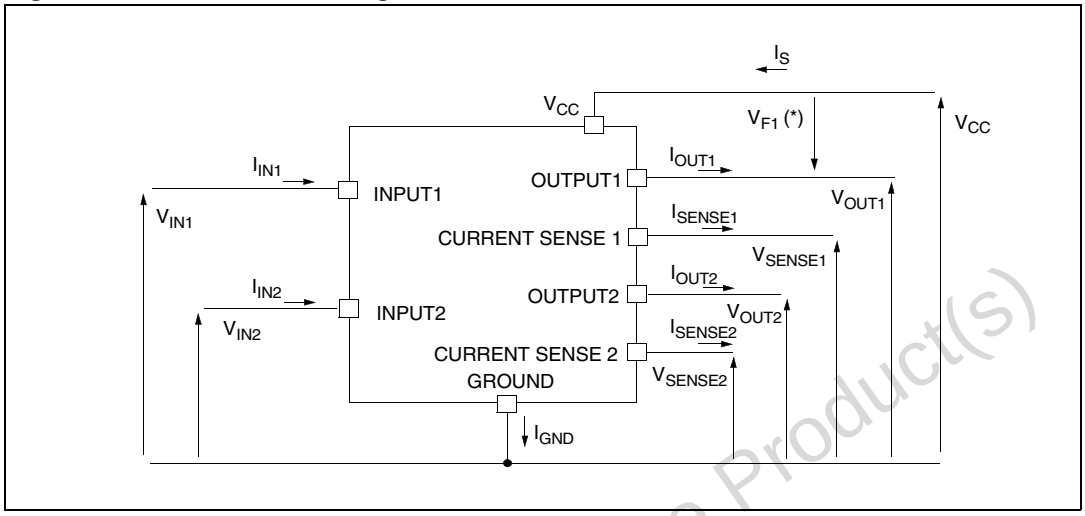

2.1 Absolute maximum ratings

Stressing the device above the rating listed in the “Absolute maximum ratings” table may cause permanent damage to the device. These are stress ratings only and operation of the device at these or any other conditions above those indicated in the Operating sections of this specification is not implied. Exposure to Absolute Maximum Rating conditions for extended periods may affect device reliability. Refer also to the STMicroelectronics SURE Program and other relevant quality document.

Table 3. Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{CC}	DC supply voltage	41	V
$-V_{CC}$	Reverse supply voltage	- 0.3	V
$- I_{GND}$	DC reverse ground pin current	- 200	mA
I_{OUT}	Output current	Internally limited	A
I_R	Reverse output current	- 21	A
I_{IN}	Input current	+/- 10	mA
V_{CSENSE}	Current sense maximum voltage	- 3 + 15	V V
V_{ESD}	Electrostatic discharge (human body model: R = 1.5KΩ; C = 100pF) - INPUT - CURRENT SENSE - OUTPUT - V_{CC}	 4000 2000 5000 5000	 V V V V

Obsolete Product(s) - Obsolete Product(s)

Table 3. Absolute maximum ratings (continued)

Symbol	Parameter	Value	Unit
E_{MAX}	Maximum switching energy (L = 0.13mH; R_L = 0Ω; V_{bat} = 13.5V; T_{jstart} = 150ºC; I_L = 40A)	145	mJ
P_{tot}	Power dissipation at T_c = 25°C	96.1	W
T_j	Junction operating temperature	Internally limited	°C
T_c	Case operating temperature	-40 to 150	°C
T_{STG}	Storage temperature	-55 to 150	°C

2.2 Thermal data

Table 4. Thermal data

Symbol	Parameter	Max. value		Unit
$R_{thj\text{-}case}$	Thermal resistance junction-case	1.3		°C/W
$R_{thj\text{-}amb}$	Thermal resistance junction-ambient	51.3(1)	37(2)	°C/W

1. When mounted on a standard single-sided FR-4 board with 0.5cm^2 of Cu (at least 35 µm thick).
2. When mounted on a standard single-sided FR-4 board with 6 cm^2 of Cu (at least 35 µm thick).

2.3 Electrical characteristics

Values specified in this section are for 8V < V_{CC} < 36V; -40°C < T_j < 150°C, unless otherwise stated.

Table 5. Power

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_{CC}(1)	Operating supply voltage		5.5	13	36	V
V_{USD}(1)	Under-voltage shutdown		3	4	5.5	V
V_{OV}(1)	Over-voltage shutdown		36			V
R_{ON}	On-state resistance	I_{OUT} = 5A; T_j = 25°C I_{OUT} = 5A; T_j = 150°C I_{OUT} = 3A; V_{CC} = 6V			30 60 100	mΩ mΩ mΩ
V_{clamp}	Clamp voltage	I_{CC} = 20mA(2)	41	48	55	V
I_S(1)	Supply current	Off-state; V_{CC}=13V; V_{IN}=V_{OUT}=0V Off-state; V_{CC}=13V; V_{IN}=V_{OUT}=0V; T_j=25°C On-state; V_{IN} = 5V; V_{CC} = 13V; I_{OUT} = 0A; R_{SENSE} = 3.9kΩ		12 12	40 25 6	µA mA mA
$I_{L(off1)}$	Off-state output current	V_{IN} = V_{OUT} = 0V	0		50	µA

Obsolete Product(s) - Obsolete Product(s)

Table 5. Power (continued)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$I_{L(off2)}$	Off-state output current	V_{IN} = 0V; V_{OUT} = 3.5V	-75		0	µA
$I_{L(off3)}$	Off-state output current	V_{IN} = V_{OUT}=0V; V_{CC}=13V; T_j =125°C			5	µA
$I_{L(off4)}$	Off-state output current	V_{IN} =V_{OUT} = 0V; V_{CC} = 13V; T_j = 25°C			3	µA

1. Per device.
2. V_{clamp} and V_{OV} are correlated. Typical difference is 5V.

Table 6. Protections

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
I_{lim}	DC short circuit current	V_{CC} = 13V 5.5V < V_{CC} < 36V	25	40	70 70	A A
T_{TSD}	Thermal shutdown temperature		150	175	200	°C
T_R	Thermal reset temperature		135			°C
T_{HYST}	Thermal hysteresis		7	15		°C
V_{demag}	Turn-off output voltage clamp	I_{OUT} = 2A; V_{IN} = 0V; L = 6mH	V_{CC}-41	V_{CC}-48	V_{CC}-55	V
V_{ON}	Output voltage drop limitation	I_{OUT} = 0.5A T_j = -40°C...+150°C		50		mV

Note: To ensure long term reliability under heavy over-load or short circuit conditions, protection and related diagnostic signals must be used together with a proper software strategy. If the device is subjected to abnormal conditions, this software must limit the duration and number of activation cycles.

Table 7. V_{CC} - output diode

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_F	Forward on voltage	- I_{OUT} = 2.6A; T_j = 150°C			0.6	V

Obsolete Product(s) - Obsolete Product(s)

Table 8. Current sense (9V ≤V_{CC} ≤16V)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
K_1	I_{OUT}/I_{SENSE}	I_{OUT1} or I_{OUT2} = 0.5A; V_{SENSE} = 0.5V; other channels open; T_j = -40°C...150°C	3300	4400	6000	
dK_1/K_1	Current sense ratio drift	I_{OUT1} or I_{OUT2} = 0.5A; V_{SENSE} = 0.5V; other channels open; T_j= - 40°C...150°C	-10		+10	%
K_2	I_{OUT}/I_{SENSE}	I_{OUT1} or I_{OUT2} = 5A; V_{SENSE} = 4V; other channels open; T_j = - 40°C T_j= 25°C...150°C	 4200 4400	 4900 4900	 6000 5750	
dK_2/K_2	Current sense ratio drift	I_{OUT1} or I_{OUT2} = 5A; V_{SENSE} = 4V; other channels open; T_j = -40°C...150°C	-6		+6	%
K_3	I_{OUT}/I_{SENSE}	I_{OUT1} or I_{OUT2} = 15A; V_{SENSE} = 4V; other channels open; T_j = -40°C T_j = 25°C...150°C	 4200 4400	 4900 4900	 5500 5250	
dK_3/K_3	Current sense ratio drift	I_{OUT1} or I_{OUT2} = 15A; V_{SENSE} = 4V; other channels open; T_j = -40°C...150°C	-6		+6	%
$V_{SENSE1,2}$	Max analog sense output voltage	V_{CC} = 5.5V; $I_{OUT1,2}$ = 2.5A; R_{SENSE} = 10kΩ V_{CC} > 8V, $I_{OUT1,2}$ = 5A; R_{SENSE} = 10kΩ	2 4			V V
V_{SENSEH}	Analog sense output voltage in over-temperature condition	V_{CC} = 13V; R_{SENSE} = 3.9kΩ		5.5		V
$R_{VSENSEH}$	Analog sense output impedance in over-temperature condition	V_{CC} = 13V; T_j > T_{TSD}; all channels open		400		Ω
t_{DSENSE}	Current sense delay response	To 90% I_{SENSE}(1)			500	µs

1. Current sense signal delay after positive input slope.

Obsolete Product(s) - Obsolete Product(s)

Table 9. Logic inputs

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_{IL}	Input low level voltage				1.25	V
I_{IL}	Low level input current	V_{IN} = 1.25V	1			µA
V_{IH}	Input high level voltage		3.25			V
I_{IH}	High level input current	V_{IN} = 3.25V			10	µA
$V_{I(hyst)}$	Input hysteresis voltage		0.5			V
V_{ICL}	Input clamp voltage	I_{IN} = 1mA I_{IN} = - 1mA	6	6.8 -0.7	8	V V

Table 10. Switching (V_{CC} = 13V)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn-on delay time	R_L= 2.6Ω (see *Figure 4.*)		30		µs
$t_{d(off)}$	Turn-on delay time	R_L = 2.6Ω (see *Figure 4.*)		30		µs
$(dV_{OUT}/dt)_{on}$	Turn-on voltage slope	R_L = 2.6Ω (see *Figure 4.*)		See *Figure 10.*		V/ µs
$(dV_{OUT}/dt)_{off}$	Turn-off voltage slope	R_L = 2.6Ω (see *Figure 4.*)		See *Figure 12.*		V/ µs

Table 11. Truth table

Conditions	Input	Output	Sense
Normal operation	L H	L H	0 Nominal
Over-temperature	L H	L L	0 V_{SENSEH}
Under-voltage	L H	L L	0 0
Over-voltage	L H	L L	0 0
Short circuit to GND	L H H	L L L	0 (T_j<T_{TSD}) 0 (T_j>T_{TSD}) V_{SENSEH}
Short circuit to V_{CC}	L H	H H	0 < Nominal
Negative output voltage clamp	L	L	0


Obsolete Product(s) - Obsolete Product(s)

Table 12. Electrical transient requirements

ISO T/R 7637/1 Test pulse	Test level				
	I	II	III	IV	Delays and impedance
1	- 25V(1)	- 50V(1)	- 75V(1)	- 100V(1)	2ms, 10Ω
2	+ 25V(1)	+ 50V(1)	+ 75V(1)	+ 100V(1)	0.2ms, 10Ω
3a	- 25V(1)	- 50V(1)	- 100V(1)	- 150V(1)	0.1µs, 50Ω
3b	+ 25V(1)	+ 50V(1)	+ 75V(1)	+ 100V(1)	0.1µs, 50Ω
4	- 4V(1)	- 5V(1)	- 6V(1)	- 7V(1)	100ms, 0.01Ω
5	+ 26.5V(1)	+ 46.5V(2)	+ 66.5V(2)	+ 86.5V(2)	400ms, 2Ω


1. All functions of the device are performed as designed after exposure to disturbance.
2. One or more functions of the device is not performed as designed after exposure and cannot be returned to proper operation without replacing the device.

Figure 4. Switching characteristics

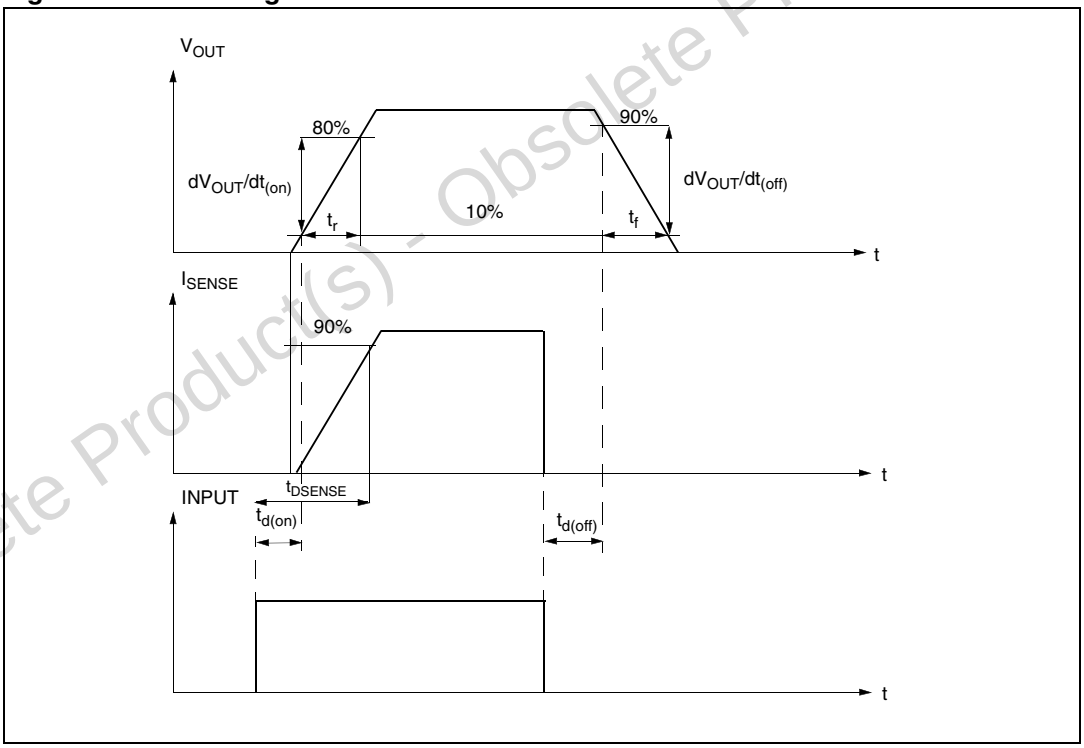


Obsolete Product(s) - Obsolete Product(s)

Figure 5. I_{OUT}/I_{SENSE} versus I_{OUT}

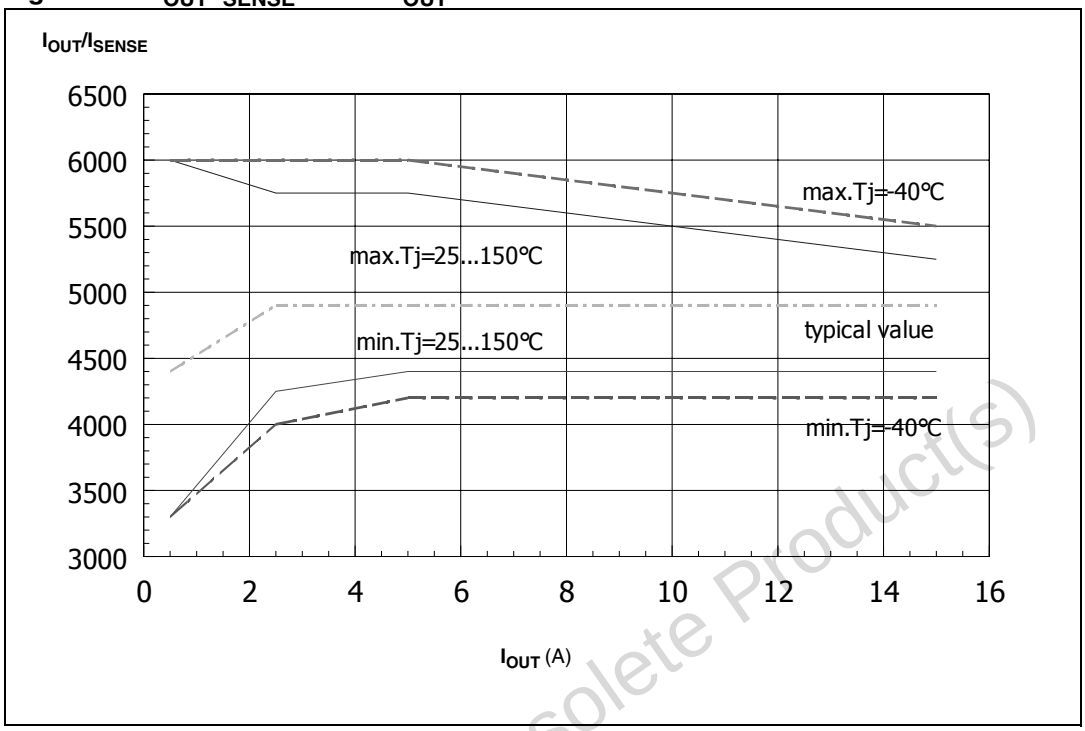

Obsolete Product(s) - Obsolete Product(s)

Figure 6. Waveforms

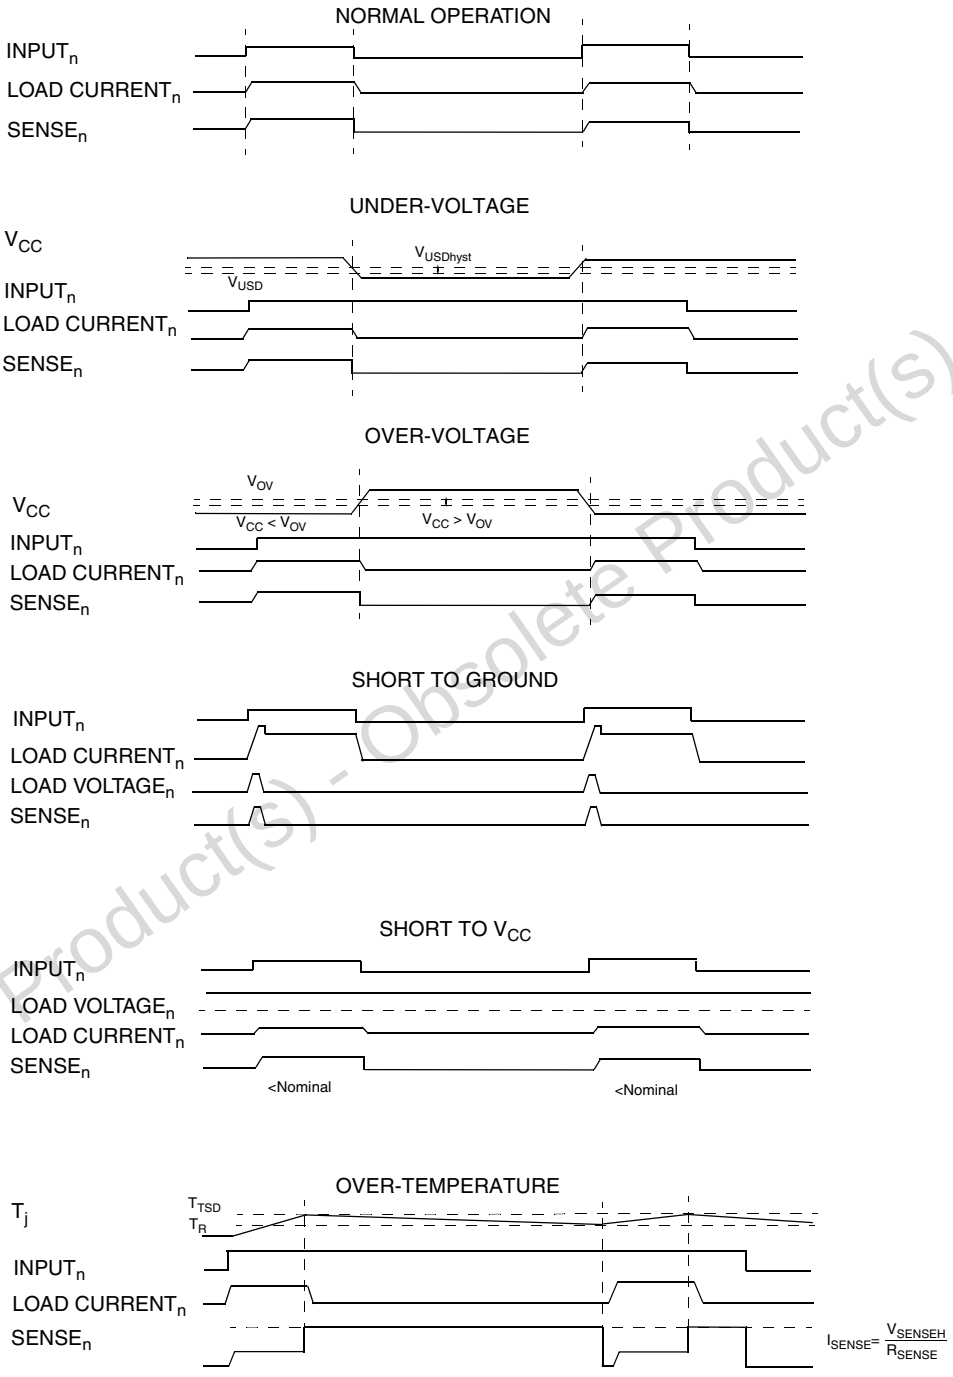

Obsolete Product(s) - Obsolete Product(s)

2.4 Electrical characteristics curves

Figure 7. Off-state output current

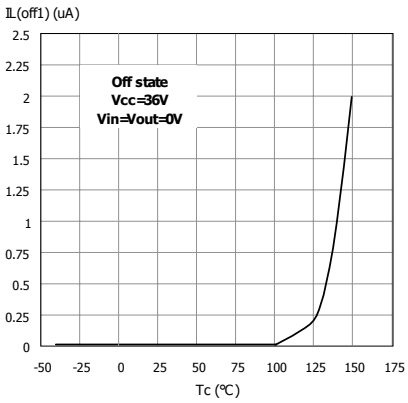


Figure 8. High level input current

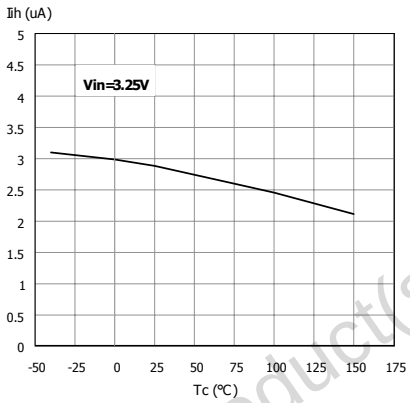


Figure 9. Input clamp voltage

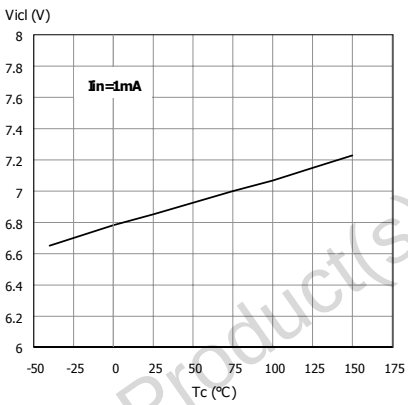


Figure 10. Turn-on voltage slope

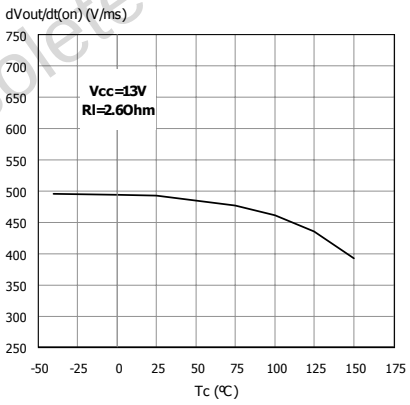


Figure 11. Over-voltage shutdown


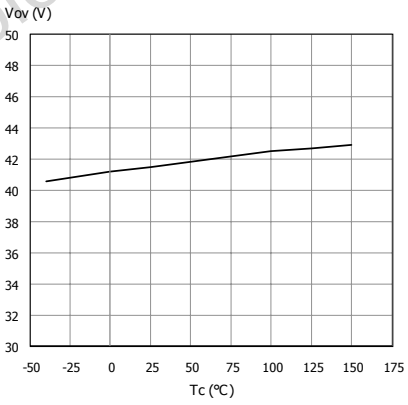


Figure 12. Turn-off voltage slope

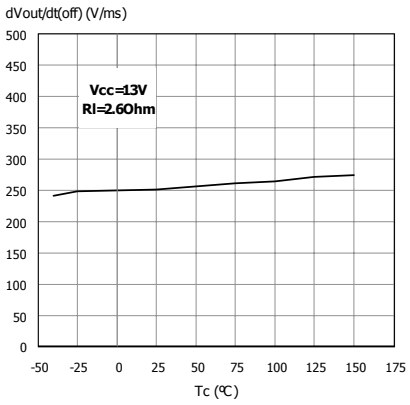

Obsolete Product(s) - Obsolete Product(s)

Figure 13. I_{LIM} vs T_{case}

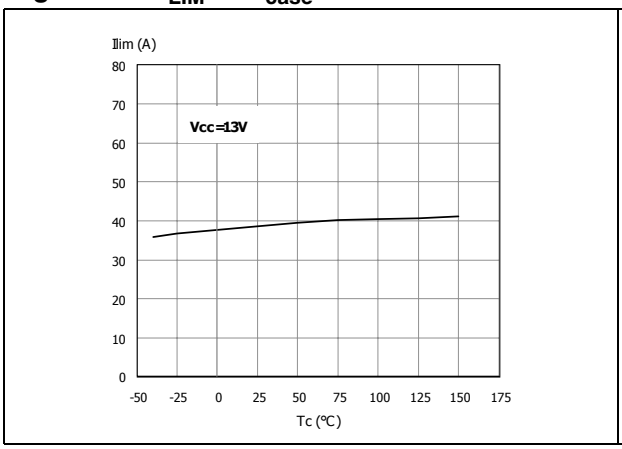


Figure 14. On-state resistance vs V_{CC}

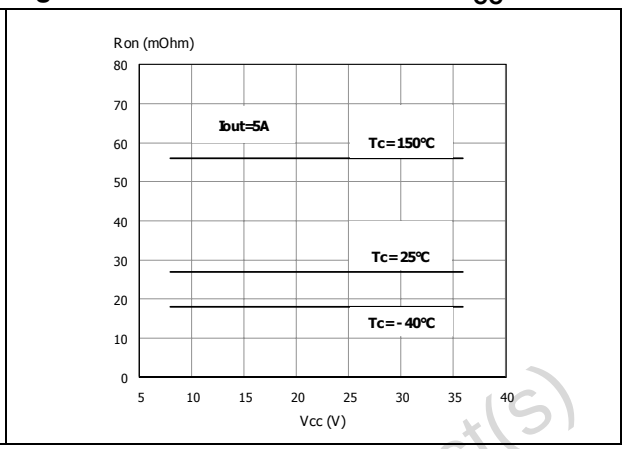


Figure 15. Input high level

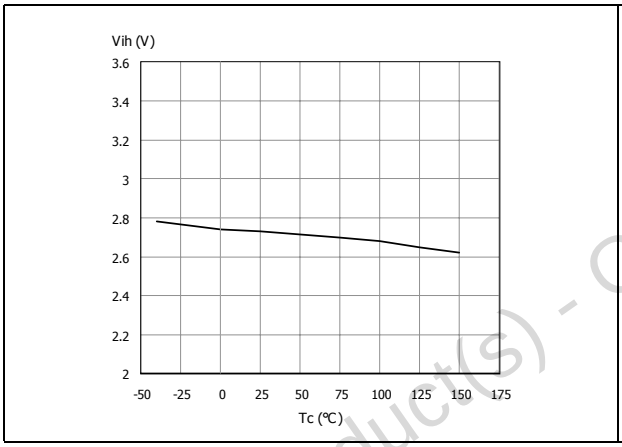


Figure 16. Input hysteresis voltage

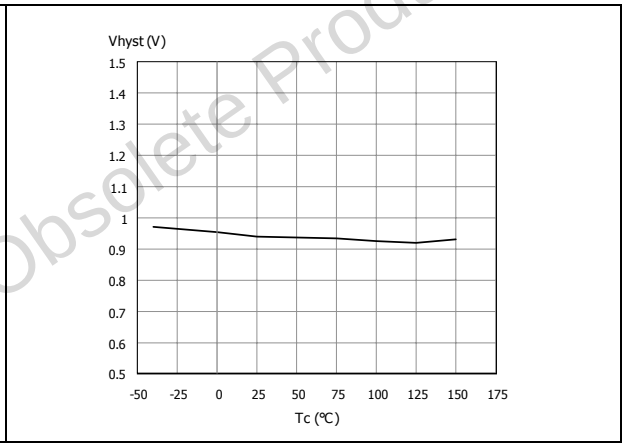


Figure 17. On-state resistance vs Tcase


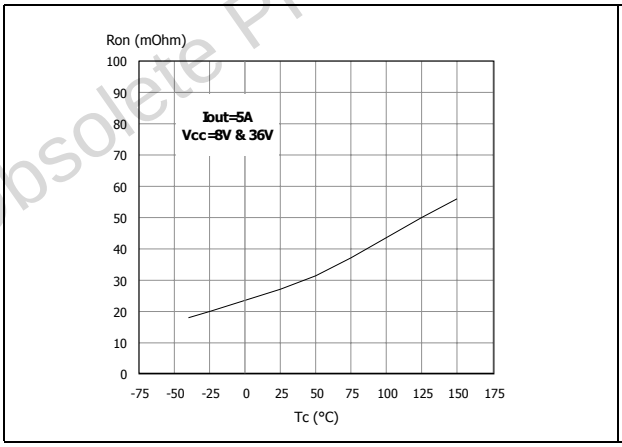



Figure 18. Input low level

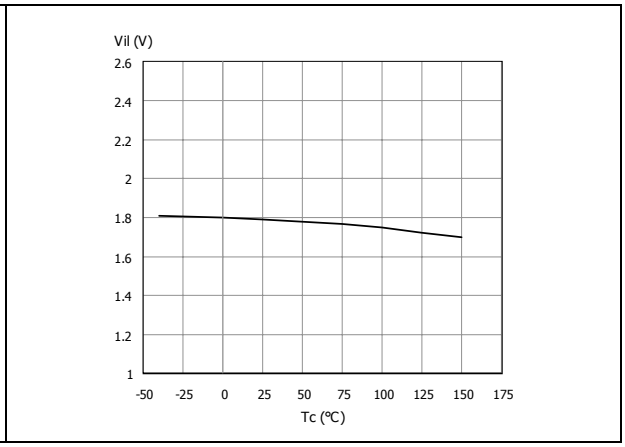

Obsolete Product(s) - Obsolete Product(s)

3 Application information

Figure 19. Application schematic

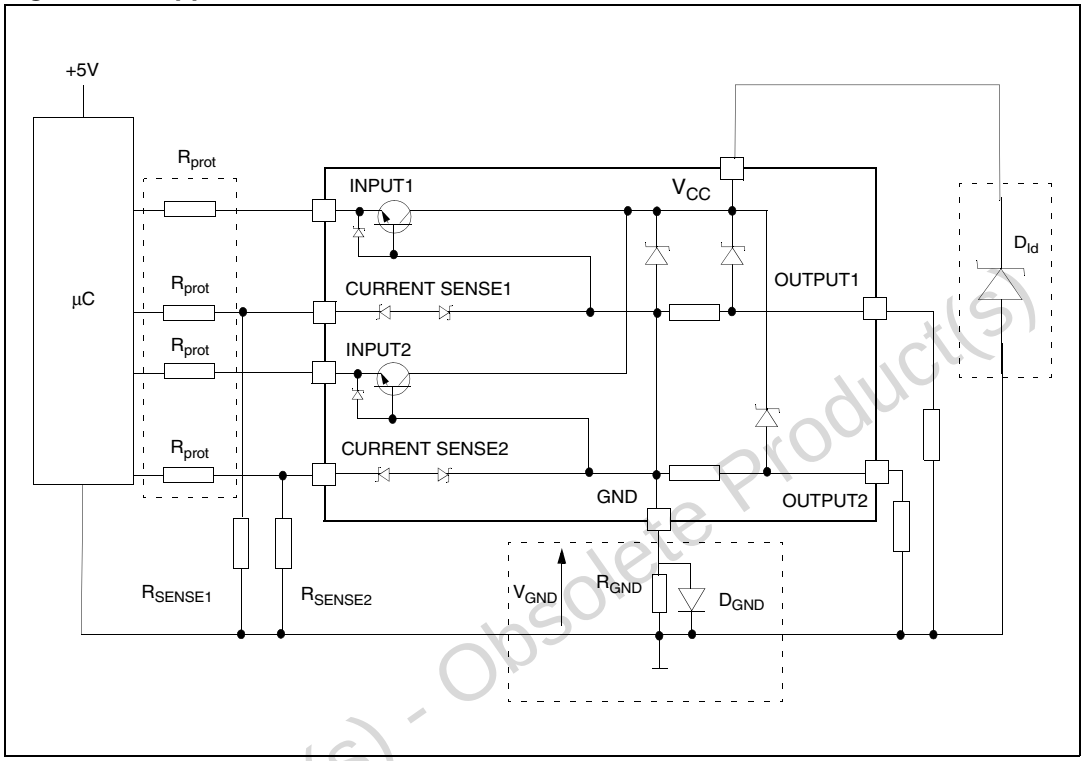

Obsolete Product(s) - Obsolete Product(s)

3.1 GND protection network against reverse battery

This section provides two solutions for implementing a ground protection network against reverse battery.

3.1.1 Solution 1: a resistor in the ground line (R_{GND} only)

This can be used with any type of load.

The following show how to dimension the R_{GND} resistor:

1. $R_{GND} \leq 600mV / 2 (I_{S(on)max})$
2. $R_{GND} \geq (- V_{CC}) / (- I_{GND})$

where $- I_{GND}$ is the DC reverse ground pin current and can be found in the absolute maximum rating section of the device datasheet.

Power dissipation in R_{GND} (when $V_{CC} < 0$ during reverse battery situations) is:

$$P_D = (- V_{CC})^2 / R_{GND}$$

This resistor can be shared amongst several different HSDs. Please note that the value of this resistor should be calculated with formula (1) where $I_{S(on)max}$ becomes the sum of the maximum on-state currents of the different devices.

Please note that, if the microprocessor ground is not shared by the device ground, then the R_{GND} will produce a shift ($I_{S(on)max}$ * R_{GND}) in the input thresholds and the status output values. This shift will vary depending on how many devices are ON in the case of several high-side drivers sharing the same R_{GND} .

If the calculated power dissipation requires the use of a large resistor, or several devices have to share the same resistor, then ST suggests using solution 2 below.

3.1.2 Solution 2: a diode (D_{GND}) in the ground line

A resistor (R_{GND} = 1kΩ) should be inserted in parallel to D_{GND} if the device will be driving an inductive load. This small signal diode can be safely shared amongst several different HSD. Also in this case, the presence of the ground network will produce a shift (j600mV) in the input threshold and the status output values if the microprocessor ground is not common with the device ground. This shift will not vary if more than one HSD shares the same diode/resistor network. Series resistor in INPUT and STATUS lines are also required to prevent that, during battery voltage transient, the current exceeds the Absolute Maximum Rating. Safest configuration for unused INPUT and STATUS pin is to leave them unconnected.

3.2 Load dump protection

D_{ld} is necessary (voltage transient suppressor) if the load dump peak voltage exceeds the V_{CC} maximum DC rating. The same applies if the device is subject to transients on the V_{CC} line that are greater than those shown in the ISO T/R 7637/1 table.

3.3 MCU I/O protection

If a ground protection network is used and negative transients are present on the V_{CC} line, the control pins will be pulled negative. ST suggests to insert a resistor (R_{prot}) in line to prevent the µC I/O pins from latching up.

The value of these resistors is a compromise between the leakage current of µC and the current required by the HSD I/Os (Input levels compatibility) with the latch-up limit of µC I/Os:

$$- V_{CCpeak} / I_{latchup} \leq R_{prot} \leq (V_{OH\mu C} - V_{IH} - V_{GND}) / I_{IHmax}$$

Example

For the following conditions:

V_{CCpeak} = - 100V

$I_{latchup} \geq$ 20mA

$V_{OH\mu C} \geq$ 4.5V

5kΩ $\leq R_{prot} \leq$ 65kΩ


Recommended values are:

R_{prot} = 10kΩ

Obsolete Product(s) - Obsolete Product(s)

3.4 Maximum demagnetization energy (V_{CC} = 13.5V)


Figure 20. Maximum turn-off current versus load inductance

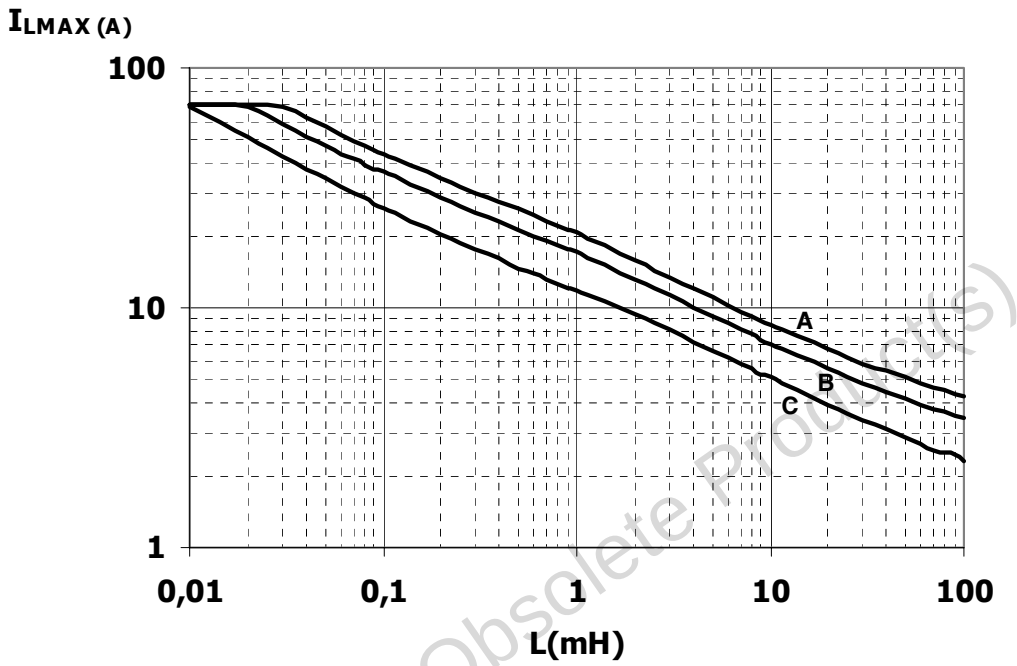

A = single pulse at T_{Jstart} = 150ºC

B= repetitive pulse at T_{Jstart} = 100ºC

C= repetitive pulse at T_{Jstart} = 125ºC

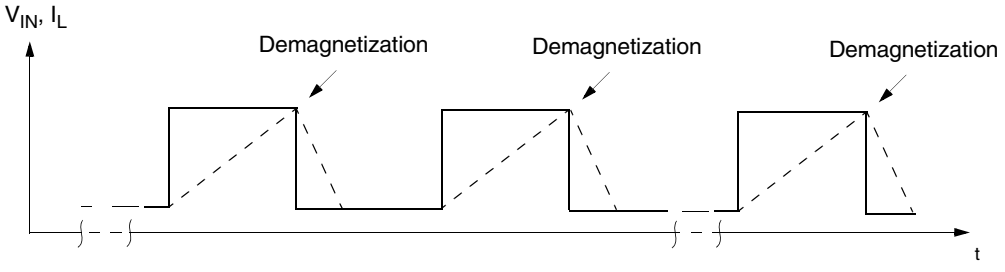

Note: Values are generated with R_L = 0Ω


In case of repetitive pulses, T_{jstart} (at beginning of each demagnetization) of every pulse must not exceed the temperature specified above for curves B and C.

Obsolete Product(s) - Obsolete Product(s)

4 Package and PCB thermal data


4.1 PowerSO-10 thermal data

Figure 21. PowerSO-10 PC board

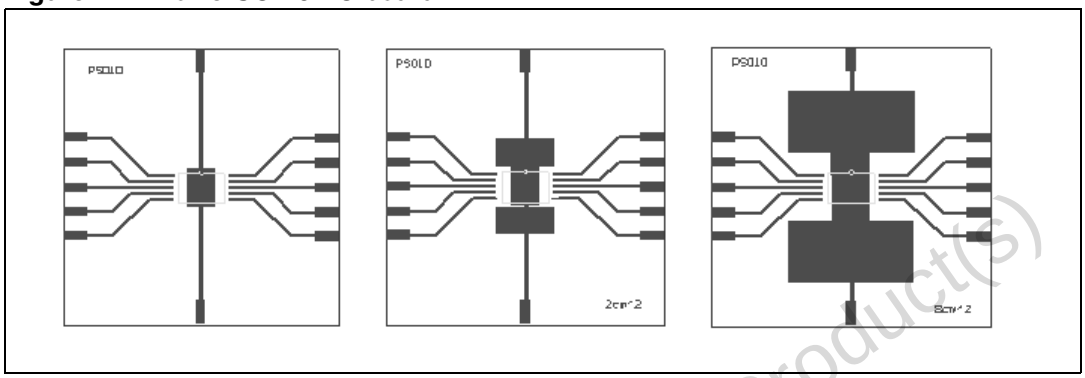


Note: Layout condition of R_{th} and Z_{th} measurements (PCB FR4 area = 58mm x 58mm, PCB thickness = 2mm, Cu thickness = 35µm, Copper areas: from minimum pad-lay-out to 8cm^2).

Figure 22. $R_{thj\text{-}amb}$ Vs PCB copper area in open box free air condition

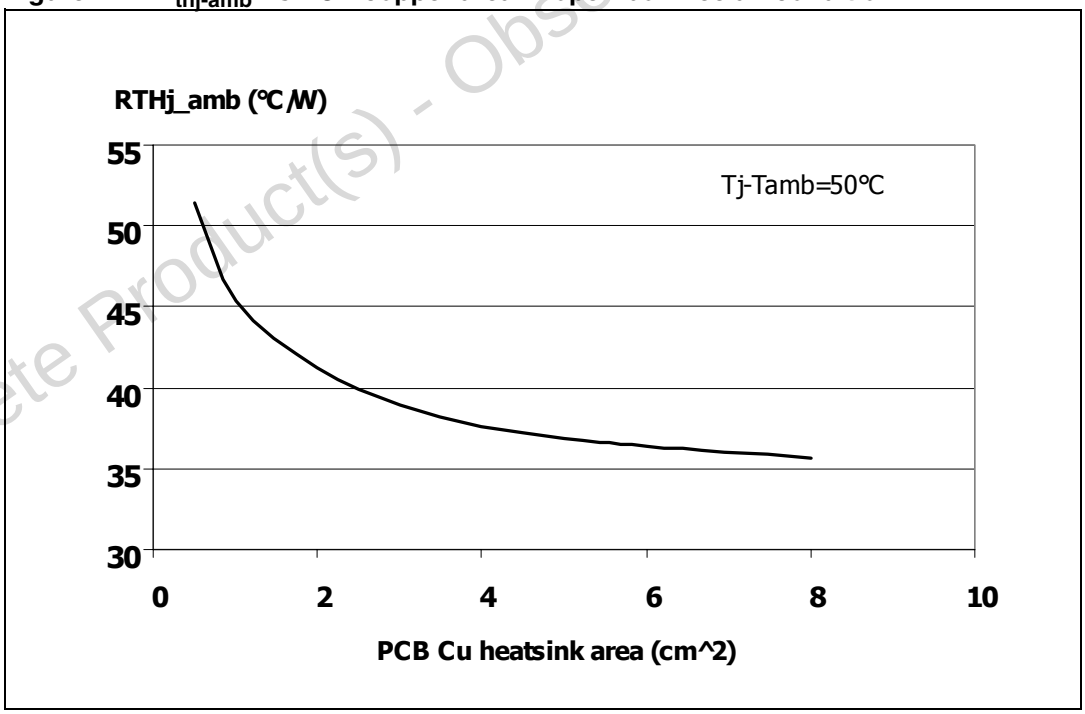

Obsolete Product(s) - Obsolete Product(s)

Figure 23. Thermal impedance junction ambient single pulse

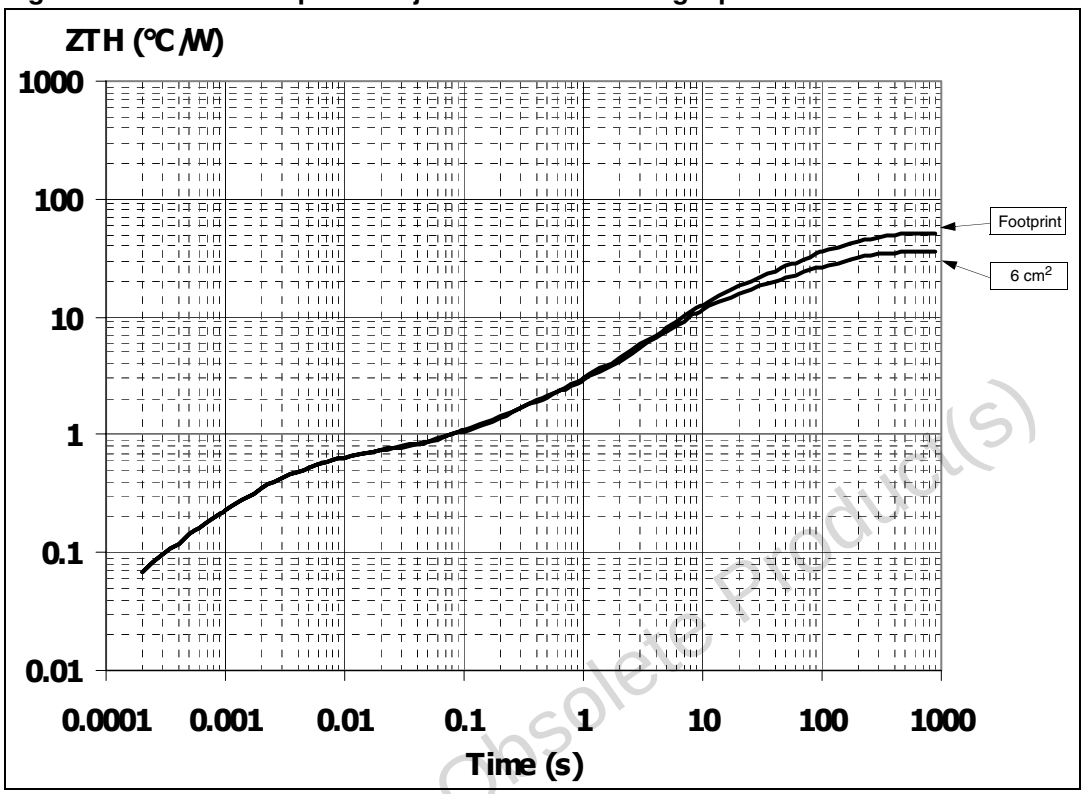


Equation 1: pulse calculation formula

$$Z_{TH\delta} = R_{TH} \cdot \delta + Z_{THtp}(1 - \delta)$$

where $\delta = t_p / T$

Figure 24. Thermal fitting model of a quad channel HSD in PowerSO-10

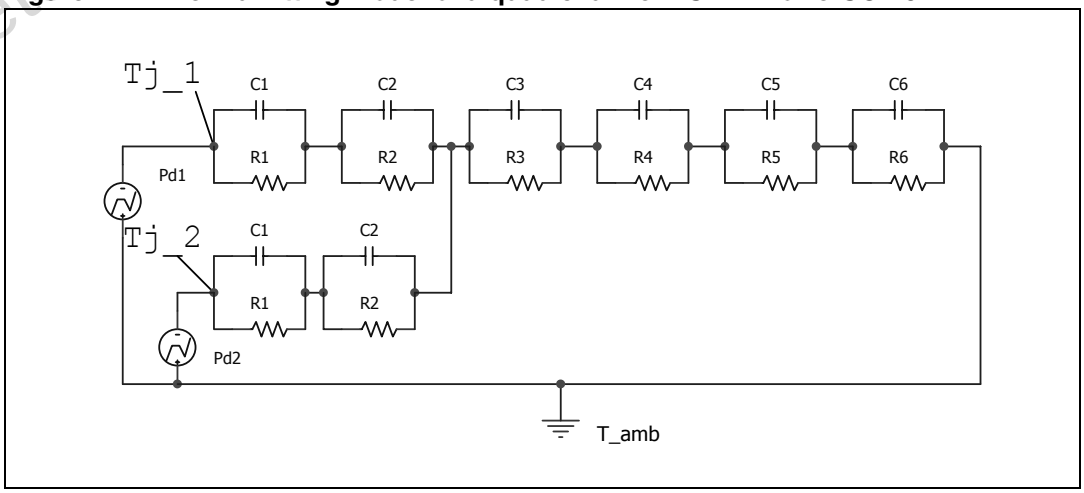

Obsolete Product(s) - Obsolete Product(s)

Table 13. Thermal parameters

Area / island (cm^2)	Footprint	6
R1 (°C/W)	0.05	
R2 (°C/W)	0.3	
R3 (°C/W)	0.3	
R4 (°C/W)	0.8	
R5 (°C/W)	12	
R6 (°C/W)	37	22
C1 (W.s/°C)	0.001	
C2 (W.s/°C)	5E-03	
C3 (W.s/°C)	0.02	
C4 (W.s/°C)	0.3	
C5 (W.s/°C)	0.75	
C6 (W.s/°C)	3	5

Obsolete Product(s) - Obsolete Product(s)


5 Package and packing information

5.1 ECOPACK® packages

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK® is an ST trademark.

5.2 PowerSO-10 mechanical data

Figure 25. PowerSO-10 package dimensions

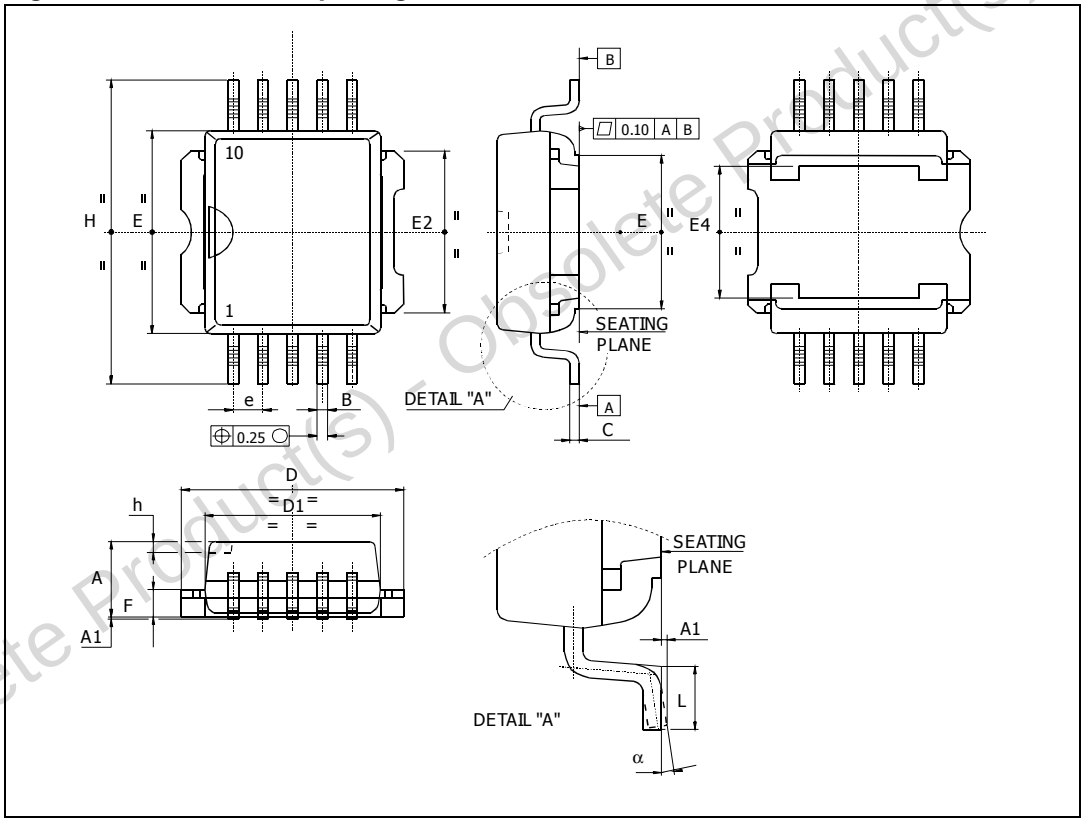

Obsolete Product(s) - Obsolete Product(s)

Table 14. PowerSO-10 mechanical data

Dim.	mm		
	Min.	Typ.	Max.
A	3.35		3.65
A(1)	3.4		3.6
A1	0		0.10
B	0.40		0.60
B(1)	0.37		0.53
C	0.35		0.55
C(1)	0.23		0.32
D	9.40		9.60
D1	7.40		7.60
E	9.30		9.50
E2	7.20		7.60
E2(1)	7.30		7.50
E4	5.90		6.10
E4(1)	5.90		6.30
e		1.27	
F	1.25		1.35
F(1)	1.20		1.40
H	13.80		14.40
H(1)	13.85		14.35
h		0.50	
L	1.20		1.80
L(1)	0.80		1.10
α	0°		8°
α(1)	2°		8°

1. Muar only POA P013P.

Obsolete Product(s) - Obsolete Product(s)

5.3 PowerSO-10 packing information

Figure 26. PowerSO-10 suggested pad layout


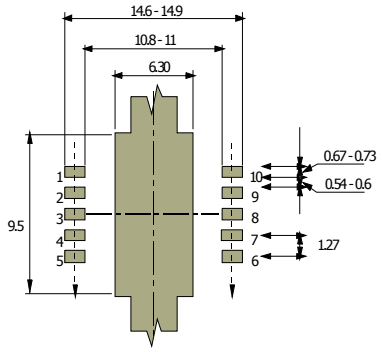



Figure 27. PowerSO-10 tube shipment (no suffix)

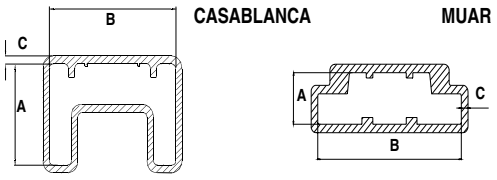

All dimensions are in mm.

	Base Q.ty	Bulk Q.ty	Tube length (± 0.5)	A	B	C (± 0.1)
Casablanca	50	1000	532	10.4	16.4	0.8
Muar	50	1000	532	4.9	17.2	0.8

Figure 28. PowerSO-10 tape and reel shipment (suffix "TR")

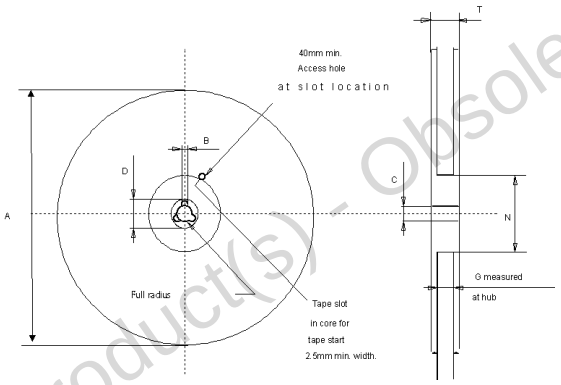

Reel dimensions


Base Q.ty	600
Bulk Q.ty	600
A (max)	330
B (min)	1.5
C (± 0.2)	13
F	20.2
G (+ 2 / -0)	24.4
N (min)	60
T (max)	30.4


Tape dimensions


According to Electronic Industries Association (EIA) Standard 481 rev. A, Feb. 1986

Tape width	W	24
Tape Hole Spacing	P0 (± 0.1)	4
Component Spacing	P	24
Hole Diameter	D (± 0.1/-0)	1.5
Hole Diameter	D1 (min)	1.5
Hole Position	F (± 0.05)	11.5
Compartment Depth	K (max)	6.5
Hole Spacing	P1 (± 0.1)	2

All dimensions are in mm.

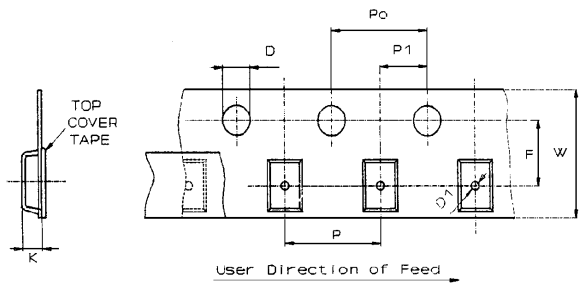

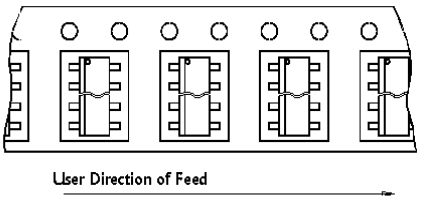

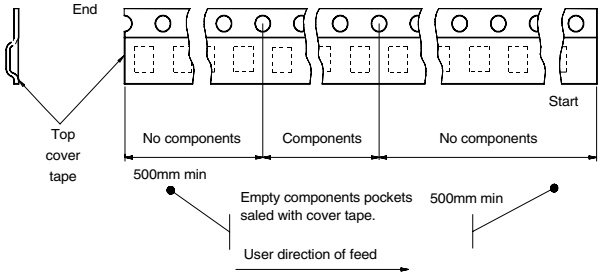

Obsolete Product(s) - Obsolete Product(s)

6 Revision history

Table 15. Document revision history

Date	Revision	Changes
07-Jul-2004	1	Initial release.
09-Sep-2004	2	Current and voltage convention update (page 2). Configuration diagram (top view) & suggested connections for unused and n.c. pins insertion (page 2). 6 cm2 Cu condition insertion in thermal data table (page 3). V_{CC} - output diode section update (page 3). Revision history table insertion (page 17). Disclaimers update (page 18).
03-May-2006	3	Suggested connections for unused and n.c. pins correction.
15-Dec-2008	4	Document reformatted and restructured. Added contents, list of tables and figures. Added *ECOPACK® packages* information.
24-Sep-2013	5	Updated Disclaimer.

Obsolete Product(s) - Obsolete Product(s)

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST’s terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST’S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

ST PRODUCTS ARE NOT DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE ST PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER’S SOLE RISK, EVEN IF ST HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY ST AS BEING INTENDED FOR “AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL” INDUSTRY DOMAINS ACCORDING TO ST PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.
Information in this document supersedes and replaces all information previously supplied.
The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2013 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

Obsolete Product(s) - Obsolete Product(s)