
# TDA7235

## 1.6W AUDIO AMPLIFIER

- OPERATING VOLTAGE 1.8 TO 24V
- LOW QUIESCENT CURRENT
- HIGH POWER CAPABILITY
- LOW CROSSOVER DISTORTION
- SOFT CLIPPING




**Minidip (4 +4)**

### DESCRIPTION

The TDA7235 is a monolithic integrated circuit in 4 +4 lead Minidip package, intended for use as class AB power amplifier with wide range of supply voltage in portable radios, cassette recorders and players, TV sets, etc..

### TEST AND APPLICATION CIRCUIT

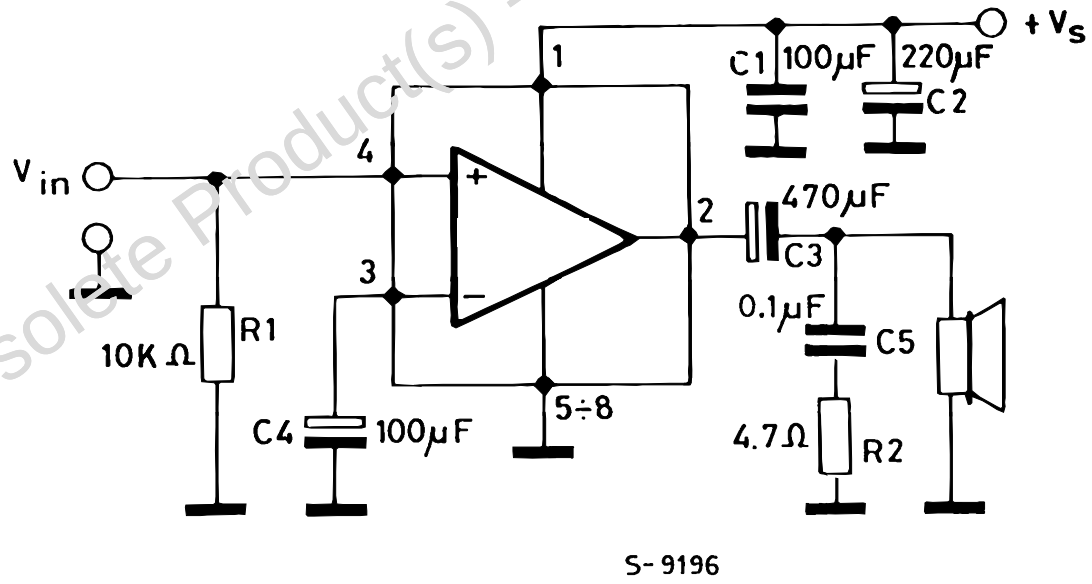



Obsolete Product(s) - Obsolete Product(s)

## ABSOLUTE MAXIMUM RATINGS

| Symbol | Parameter | Value | Unit |
|---|---|---|---|
| $V_S$ | Supply Voltage | 28 | V |
| $I_O$ | Output Peak Current | 1 | A |
| $P_{tot}$ | Total Power Dissipation $T_{amb}$ = 50°C<br>$T_{case}$ = 70°C | 1.25<br>4 | W<br>W |
| $T_{stg}$, $T_j$ | Storage and Junction Temperature | -40 to150 | °C |

## PIN CONNECTION (Top view)

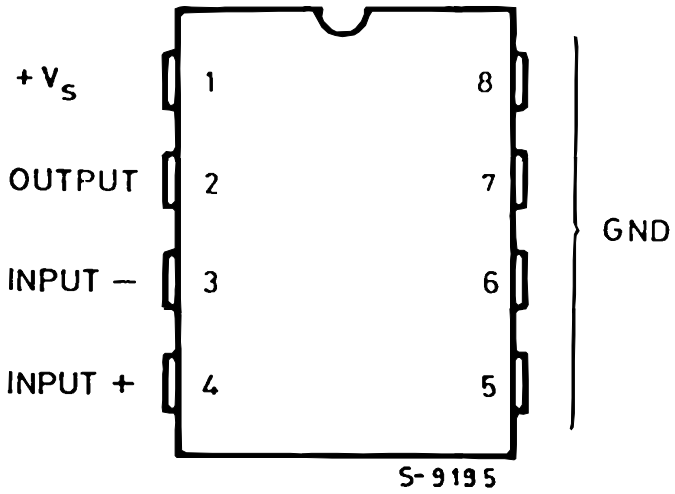


## THERMAL DATA


| Symbol | Description | | Value | Unit |
|---|---|---|---|---|
| $R_{th\ j\text{-}amb}$ | Thermal Resistance Junction-ambient | max. | 80 | °C/W |
| $R_{th\ j\text{-}case}$ | Thermal Resistance Junction-pins | max. | 15 | °C/W |

**ELECTRICAL CHARACTERISTICS** ($V_S$ = 12V, $T_{amb}$ = 25°C, f = 1KHz, unless otherwise specified.)


| Symbol | Parameter | Test Condition | Min. | Typ. | Max. | Unit |
|---|---|---|---|---|---|---|
| $V_S$ | Supply Voltage | | 1.8 | | 24 | V |
| $V_O$ | Quiescent Output Voltage | $V_S$ = 9V<br>$V_S$ = 12V | | 4<br>5.5 | | V<br>V |
| $I_d$ | Quiescent Drain Current | | | 4 | 10 | mA |
| $I_b$ | Input Bias Current | | | | | |
| $P_O$ | Output Power | d = 10%<br>$V_S$ = 9V $R_L$ = 4Ω<br>$V_S$ = 12V $R_L$ = 8Ω<br>$V_S$ = 15V $R_L$ = 16Ω<br>$V_S$ = 20V $R_L$ = 32Ω | | <br>1.6<br>1.8<br>1.8<br>1.6 | | <br>W<br>W<br>W<br>W |
| d | Distortion | $P_O$ = 0.5W $R_L$ = 8Ω | | 0.3 | 1 | % |
| $G_V$ | Closed Loop Voltage Gain | | | 38 | | dB |
| $R_{in}$ | Input Resistance | | 100 | | | KΩ |
| $e_N$ | Total Input Noise | $R_S$ = 10KΩ<br>b = Curve A<br>B = 22Hz to 22KHz | | <br>2<br>3 | | <br>µV<br>µV |
| SVR | Supply Voltage Rejection | f = 100Hz $R_g$ = 10KΩ | 24 | 33 | | dB |

| DIM. | mm | | | inch | | |
|---|---|---|---|---|---|---|
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| A | | 3.3 | | | 0.130 | |
| a1 | 0.7 | | | 0.028 | | |
| B | 1.39 | | 1.65 | 0.055 | | 0.065 |
| B1 | 0.91 | | 1.04 | 0.036 | | 0.041 |
| b | | 0.5 | | | 0.020 | |
| b1 | 0.38 | | 0.5 | 0.015 | | 0.020 |
| D | | | 9.8 | | | 0.386 |
| E | | 8.8 | | | 0.346 | |
| e | | 2.54 | | | 0.100 | |
| e3 | | 7.62 | | | 0.300 | |
| e4 | | 7.62 | | | 0.300 | |
| F | | | 7.1 | | | 0.280 |
| I | | | 4.8 | | | 0.189 |
| L | | 3.3 | | | 0.130 | |
| Z | 0.44 | | 1.6 | 0.017 | | 0.063 |

## OUTLINE AND MECHANICAL DATA



**PowerMinidip**

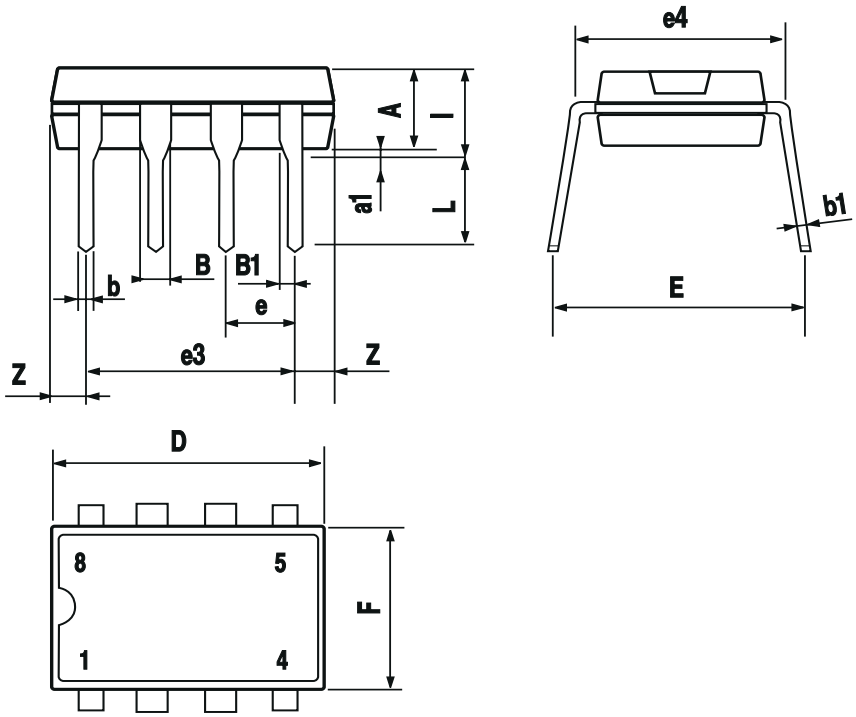

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics.

All other names are the property of their respective owners

© 2003 STMicroelectronics - All rights reserved

**STMicroelectronics GROUP OF COMPANIES**

Australia – Belgium - Brazil - Canada - China – Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States

**www.st.com**