

MRF6S9130HR3/HSR3 replaced by MRFE6S9130HR3/HSR3. Refer to Device Migration PCN12895 for more details.

# RF Power Field Effect Transistors

## N-Channel Enhancement-Mode Lateral MOSFETs

Designed for N-CDMA, GSM and GSM EDGE base station applications with frequencies from 865 to 960 MHz. Suitable for multicarrier amplifier applications.

- Typical Single-Carrier N-CDMA Performance @ 880 MHz:  $V_{DD} = 28$  Volts,  $I_{DQ} = 950$  mA,  $P_{out} = 27$  Watts Avg., Full Frequency Band, IS-95 CDMA (Pilot, Sync, Paging, Traffic Codes 8 Through 13) Channel Bandwidth = 1.2288 MHz. PAR = 9.8 dB @ 0.01% Probability on CCDF.  
Power Gain — 19.2 dB  
Drain Efficiency — 30.5%  
ACPR @ 750 kHz Offset — -48.1 dBc in 30 kHz Bandwidth

### GSM Application

- Typical GSM Performance:  $V_{DD} = 28$  Volts,  $I_{DQ} = 950$  mA,  $P_{out} = 130$  Watts, Full Frequency Band (921-960 MHz)  
Power Gain — 18 dB  
Drain Efficiency — 63%

### GSM EDGE Application

- Typical GSM EDGE Performance:  $V_{DD} = 28$  Volts,  $I_{DQ} = 950$  mA,  $P_{out} = 56$  Watts Avg., Full Frequency Band (921-960 MHz)  
Power Gain — 18.5 dB  
Drain Efficiency — 44%  
Spectral Regrowth @ 400 kHz Offset = -63 dBc  
Spectral Regrowth @ 600 kHz Offset = -75 dBc  
EVM — 1.5% rms
- Capable of Handling 10:1 VSWR, @ 28 Vdc, 880 MHz, 130 Watts CW Output Power

### Features

- Characterized with Series Equivalent Large-Signal Impedance Parameters
- Internally Matched for Ease of Use
- Qualified Up to a Maximum of 32  $V_{DD}$  Operation
- Integrated ESD Protection
- RoHS Compliant
- In Tape and Reel. R3 Suffix = 250 Units per 56 mm, 13 inch Reel.

**Table 1. Maximum Ratings**

| Rating                               | Symbol    | Value        | Unit |
|--------------------------------------|-----------|--------------|------|
| Drain-Source Voltage                 | $V_{DSS}$ | -0.5, +68    | Vdc  |
| Gate-Source Voltage                  | $V_{GS}$  | -0.5, +12    | Vdc  |
| Storage Temperature Range            | $T_{stg}$ | - 65 to +150 | °C   |
| Case Operating Temperature           | $T_C$     | 150          | °C   |
| Operating Junction Temperature (1,2) | $T_J$     | 225          | °C   |

**Table 2. Thermal Characteristics**

| Characteristic                       | Symbol          | Value (2,3) | Unit |
|--------------------------------------|-----------------|-------------|------|
| Thermal Resistance, Junction to Case | $R_{\theta JC}$ |             | °C/W |
| Case Temperature 80°C, 130 W CW      |                 | 0.45        |      |
| Case Temperature 75°C, 27 W CW       |                 | 0.51        |      |

- Continuous use at maximum temperature will affect MTTF.
- MTTF calculator available at <http://www.freescale.com/rf>. Select Software & Tools/Development Tools/Calculators to access MTTF calculators by product.
- Refer to AN1955, *Thermal Measurement Methodology of RF Power Amplifiers*. Go to <http://www.freescale.com/rf>. Select Documentation/Application Notes - AN1955.

**MRF6S9130HR3**  
**MRF6S9130HSR3**

**880 MHz, 27 W AVG., 28 V**  
**SINGLE N-CDMA**  
**LATERAL N-CHANNEL**  
**RF POWER MOSFETs**

**CASE 465-06, STYLE 1**  
**NI-780**  
**MRF6S9130HR3**

**CASE 465A-06, STYLE 1**  
**NI-780S**  
**MRF6S9130HSR3**

**Table 3. ESD Protection Characteristics**

| Test Methodology                      | Class        |
|---------------------------------------|--------------|
| Human Body Model (per JESD22-A114)    | 1A (Minimum) |
| Machine Model (per EIA/JESD22-A115)   | A (Minimum)  |
| Charge Device Model (per JESD22-C101) | IV (Minimum) |

**Table 4. Electrical Characteristics** ( $T_C = 25^\circ\text{C}$  unless otherwise noted)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|----------------|--------|-----|-----|-----|------|
|----------------|--------|-----|-----|-----|------|

**Off Characteristics**

|                                                                                                   |           |   |   |    |                 |
|---------------------------------------------------------------------------------------------------|-----------|---|---|----|-----------------|
| Zero Gate Voltage Drain Leakage Current<br>( $V_{DS} = 68\text{ Vdc}$ , $V_{GS} = 0\text{ Vdc}$ ) | $I_{DSS}$ | — | — | 10 | $\mu\text{Adc}$ |
| Zero Gate Voltage Drain Leakage Current<br>( $V_{DS} = 28\text{ Vdc}$ , $V_{GS} = 0\text{ Vdc}$ ) | $I_{DSS}$ | — | — | 1  | $\mu\text{Adc}$ |
| Gate-Source Leakage Current<br>( $V_{GS} = 5\text{ Vdc}$ , $V_{DS} = 0\text{ Vdc}$ )              | $I_{GSS}$ | — | — | 1  | $\mu\text{Adc}$ |

**On Characteristics**

|                                                                                                               |              |   |      |     |     |
|---------------------------------------------------------------------------------------------------------------|--------------|---|------|-----|-----|
| Gate Threshold Voltage<br>( $V_{DS} = 10\text{ Vdc}$ , $I_D = 400\text{ }\mu\text{Adc}$ )                     | $V_{GS(th)}$ | 1 | 2.1  | 3   | Vdc |
| Gate Quiescent Voltage<br>( $V_{DD} = 28\text{ Vdc}$ , $I_D = 950\text{ mAdc}$ , Measured in Functional Test) | $V_{GS(Q)}$  | 2 | 2.9  | 4   | Vdc |
| Drain-Source On-Voltage<br>( $V_{GS} = 10\text{ Vdc}$ , $I_D = 2.74\text{ Adc}$ )                             | $V_{DS(on)}$ | — | 0.22 | 0.5 | Vdc |

**Dynamic Characteristics <sup>(1)</sup>**

|                                                                                                                       |           |   |     |   |    |
|-----------------------------------------------------------------------------------------------------------------------|-----------|---|-----|---|----|
| Output Capacitance<br>( $V_{DS} = 28\text{ Vdc} \pm 30\text{ mV(rms)ac}$ @ 1 MHz, $V_{GS} = 0\text{ Vdc}$ )           | $C_{OSS}$ | — | 66  | — | pF |
| Reverse Transfer Capacitance<br>( $V_{DS} = 28\text{ Vdc} \pm 30\text{ mV(rms)ac}$ @ 1 MHz, $V_{GS} = 0\text{ Vdc}$ ) | $C_{RSS}$ | — | 1.6 | — | pF |

**Functional Tests** (In Freescale Test Fixture, 50 ohm system)  $V_{DD} = 28\text{ Vdc}$ ,  $I_{DQ} = 950\text{ mA}$ ,  $P_{out} = 27\text{ W Avg.}$  N-CDMA,  $f = 880\text{ MHz}$ , Single-Carrier N-CDMA, 1.2288 MHz Channel Bandwidth Carrier. ACPR measured in 30 kHz Channel Bandwidth @  $\pm 750\text{ kHz}$  Offset. PAR = 9.8 dB @ 0.01% Probability on CCDF

|                              |          |    |       |     |     |
|------------------------------|----------|----|-------|-----|-----|
| Power Gain                   | $G_{ps}$ | 18 | 19.2  | 21  | dB  |
| Drain Efficiency             | $\eta_D$ | 29 | 30.5  | —   | %   |
| Adjacent Channel Power Ratio | ACPR     | —  | -48.1 | -46 | dBc |
| Input Return Loss            | IRL      | —  | -30   | -9  | dB  |

**Typical GSM EDGE Performances** (In Freescale GSM EDGE Test Fixture, 50 ohm system)  $V_{DD} = 28\text{ Vdc}$ ,  $I_{DQ} = 950\text{ mA}$ ,  $P_{out} = 56\text{ W Avg.}$ , 921 MHz < Frequency < 960 MHz

|                                     |          |   |      |   |       |
|-------------------------------------|----------|---|------|---|-------|
| Power Gain                          | $G_{ps}$ | — | 18.5 | — | dB    |
| Drain Efficiency                    | $\eta_D$ | — | 44   | — | %     |
| Error Vector Magnitude              | EVM      | — | 1.5  | — | % rms |
| Spectral Regrowth at 400 kHz Offset | SR1      | — | -63  | — | dBc   |
| Spectral Regrowth at 600 kHz Offset | SR2      | — | -75  | — | dBc   |

**Typical CW Performances** (In Freescale GSM Test Fixture, 50 ohm system)  $V_{DD} = 28\text{ Vdc}$ ,  $I_{DQ} = 950\text{ mA}$ ,  $P_{out} = 130\text{ W}$ , 921 MHz < Frequency < 960 MHz

|                                                                    |          |   |     |   |    |
|--------------------------------------------------------------------|----------|---|-----|---|----|
| Power Gain                                                         | $G_{ps}$ | — | 18  | — | dB |
| Drain Efficiency                                                   | $\eta_D$ | — | 63  | — | %  |
| Input Return Loss                                                  | IRL      | — | -12 | — | dB |
| $P_{out}$ @ 1 dB Compression Point, CW<br>( $f = 940\text{ MHz}$ ) | P1dB     | — | 135 | — | W  |

1. Part is internally matched on input.

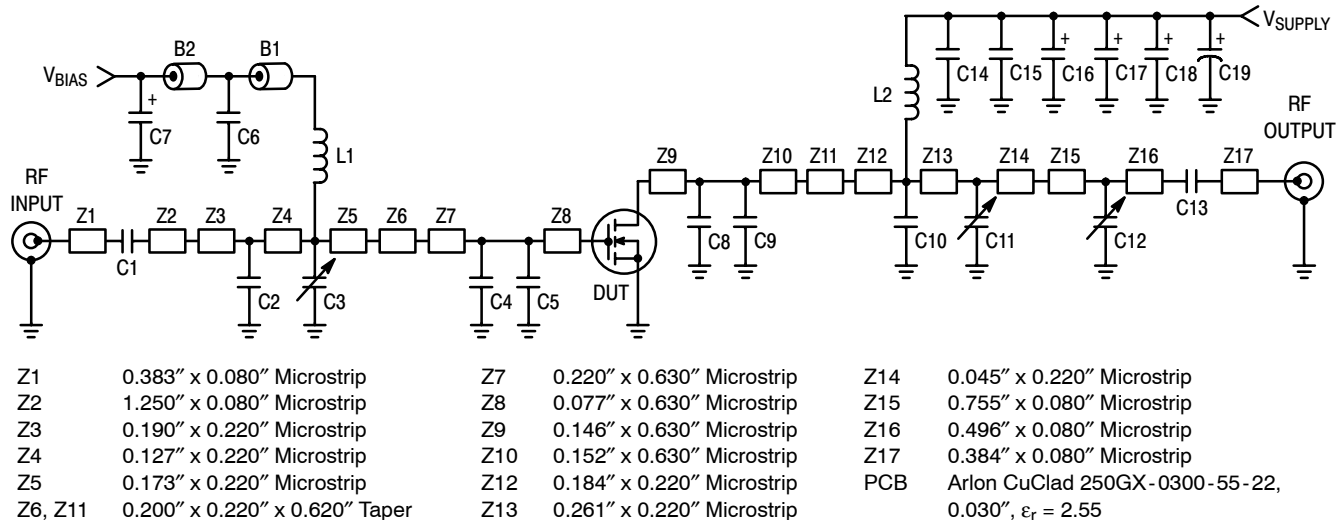


Figure 1. MRF6S9130HR3(SR3) Test Circuit Schematic

Table 5. MRF6S9130HR3(SR3) Test Circuit Component Designations and Values

| Part              | Description                                | Part Number        | Manufacturer     |
|-------------------|--------------------------------------------|--------------------|------------------|
| B1, B2            | Ferrite Beads, Short                       | 2743019447         | Fair Rite        |
| C1, C13, C14      | 47 pF Chip Capacitors                      | ATC100B470JT500XT  | ATC              |
| C2                | 8.2 pF Chip Capacitor                      | ATC100B8R2BT500XT  | ATC              |
| C3, C11           | 0.8 - 8.0 pF Variable Capacitors, Gigatrim | 27291SL            | Johanson         |
| C4, C5            | 12 pF Chip Capacitors                      | ATC100B120JT500XT  | ATC              |
| C6                | 20 K pF Chip Capacitor                     | ATC200B203KT50XT   | ATC              |
| C7, C16, C17, C18 | 10 $\mu$ F, 35 V Tantalum Chip Capacitors  | T491D106K035AT     | Kemet            |
| C8, C9            | 10 pF Chip Capacitors                      | ATC100B7R5JT500XT  | ATC              |
| C10               | 11 pF Chip Capacitor                       | ATC100B110JT500XT  | ATC              |
| C12               | 0.6 - 4.5 pF Variable Capacitor, Gigatrim  | 27271SL            | Johanson         |
| C15               | 0.56 $\mu$ F, 50 V Chip Capacitor          | C1825C564J5GAC     | Kemet            |
| C19               | 470 $\mu$ F, 63 V Electrolytic Capacitor   | EKME630ELL471MK25S | United Chemi-Con |
| L1, L2            | 12.5 nH Inductors                          | A04T-5             | Coilcraft        |

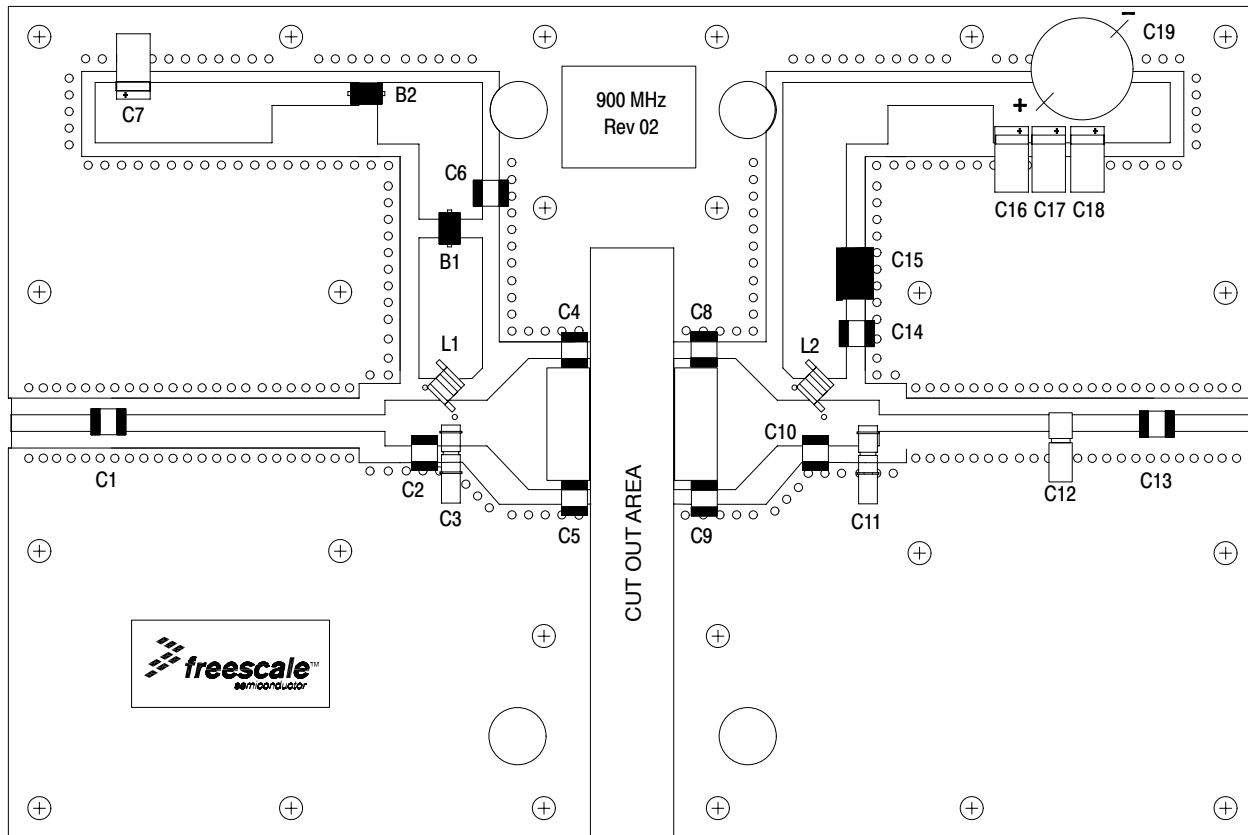


Figure 2. MRF6S9130HR3(SR3) Test Circuit Component Layout

## TYPICAL CHARACTERISTICS

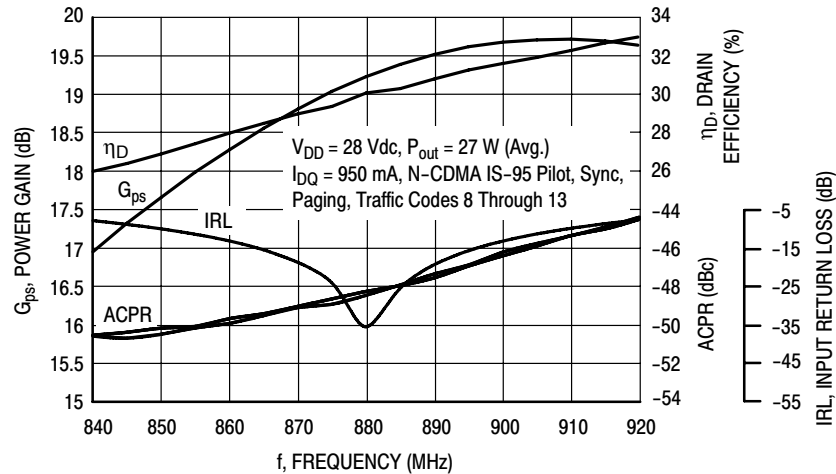


Figure 3. Single-Carrier N-CDMA Broadband Performance @  $P_{out} = 27$  Watts Avg.

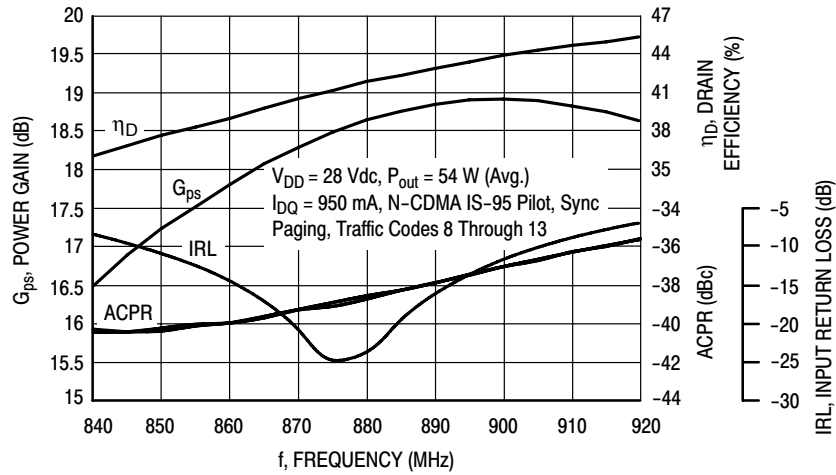


Figure 4. Single-Carrier N-CDMA Broadband Performance @  $P_{out} = 54$  Watts Avg.

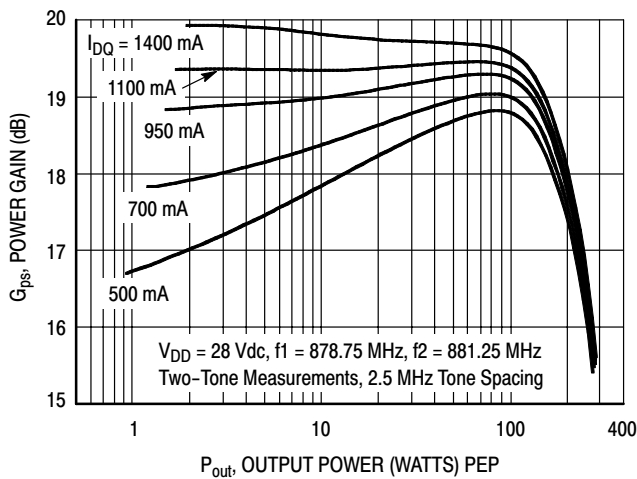


Figure 5. Two-Tone Power Gain versus Output Power



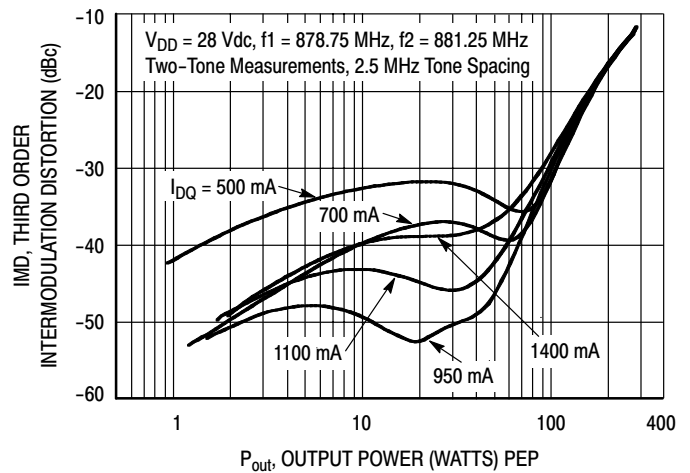


Figure 6. Third Order Intermodulation Distortion versus Output Power


## TYPICAL CHARACTERISTICS

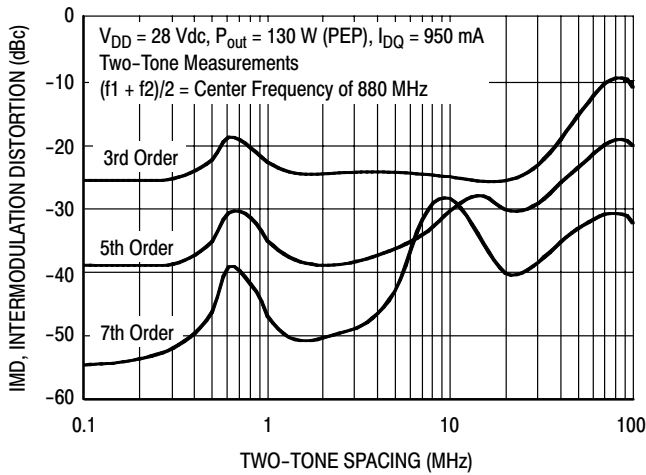


**Figure 7. Intermodulation Distortion Products versus Tone Spacing**

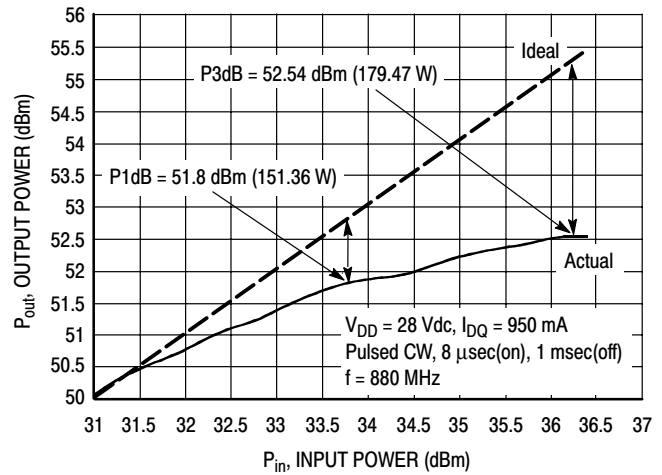


**Figure 8. Pulsed CW Output Power versus Input Power**

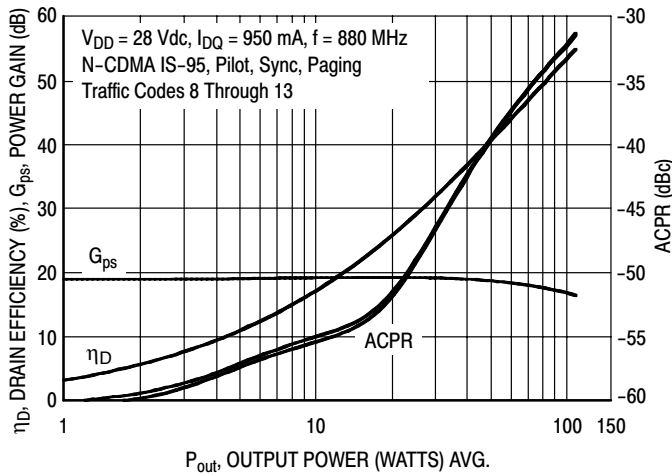

**Figure 9. Single-Carrier N-CDMA ACPR, Power Gain and Drain Efficiency versus Output Power**

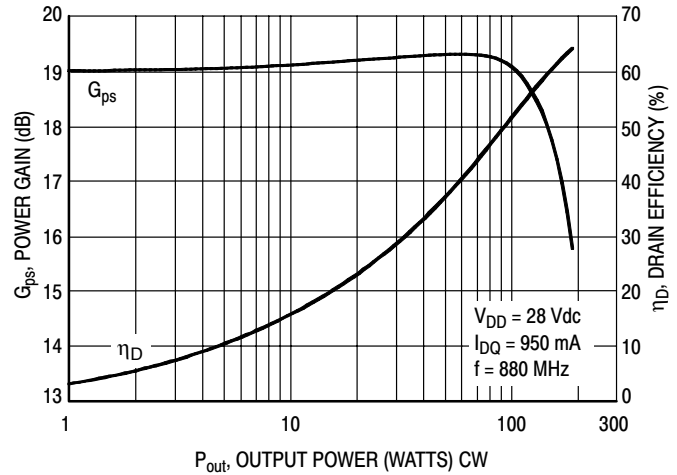


**Figure 10. Power Gain and Drain Efficiency versus CW Output Power**

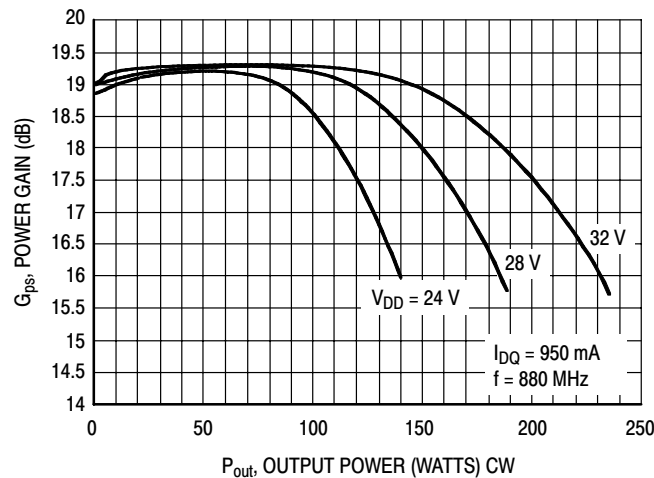

**Figure 11. Power Gain versus Output Power**

## TYPICAL CHARACTERISTICS

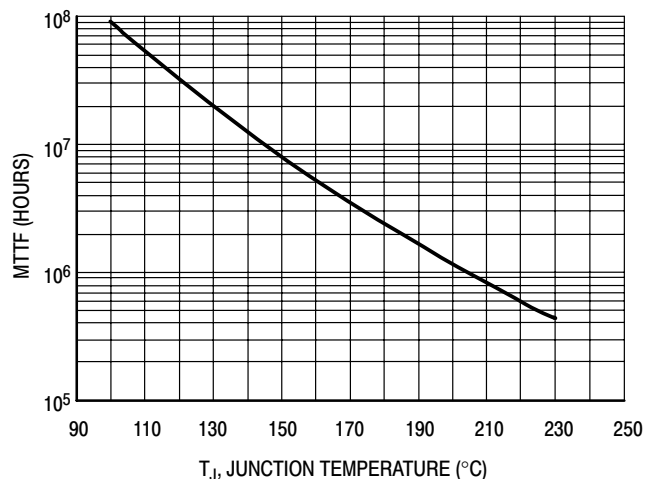


This above graph displays calculated MTTF in hours when the device is operated at  $V_{DD} = 28 \text{ Vdc}$ ,  $P_{out} = 27 \text{ W Avg.}$ , and  $\eta_D = 30.5\%$ .


MTTF calculator available at <http://www.freescale.com/rf>. Select Software & Tools/Development Tools/Calculators to access MTTF calculators by product.

**Figure 12. MTTF versus Junction Temperature**


## N-CDMA TEST SIGNAL

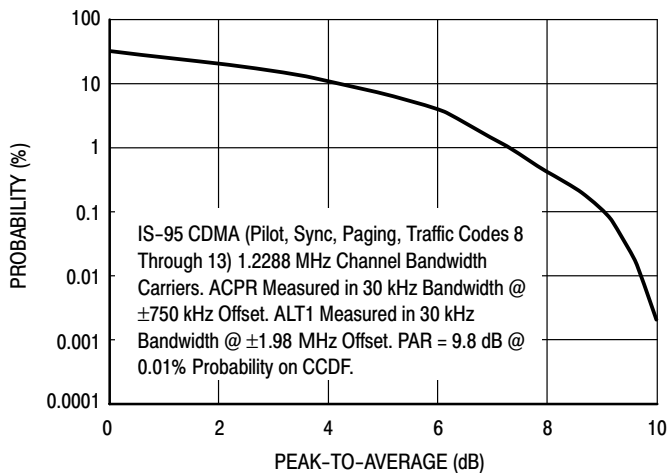

**Figure 13. Single-Carrier CCDF N-CDMA**

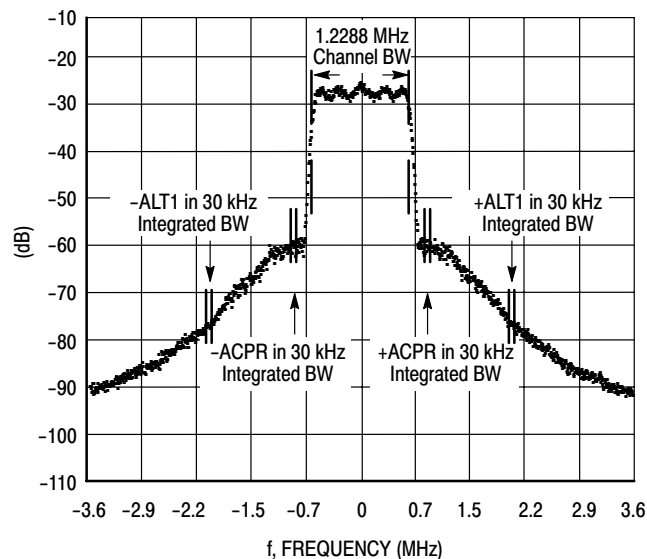

**Figure 14. Single-Carrier N-CDMA Spectrum**

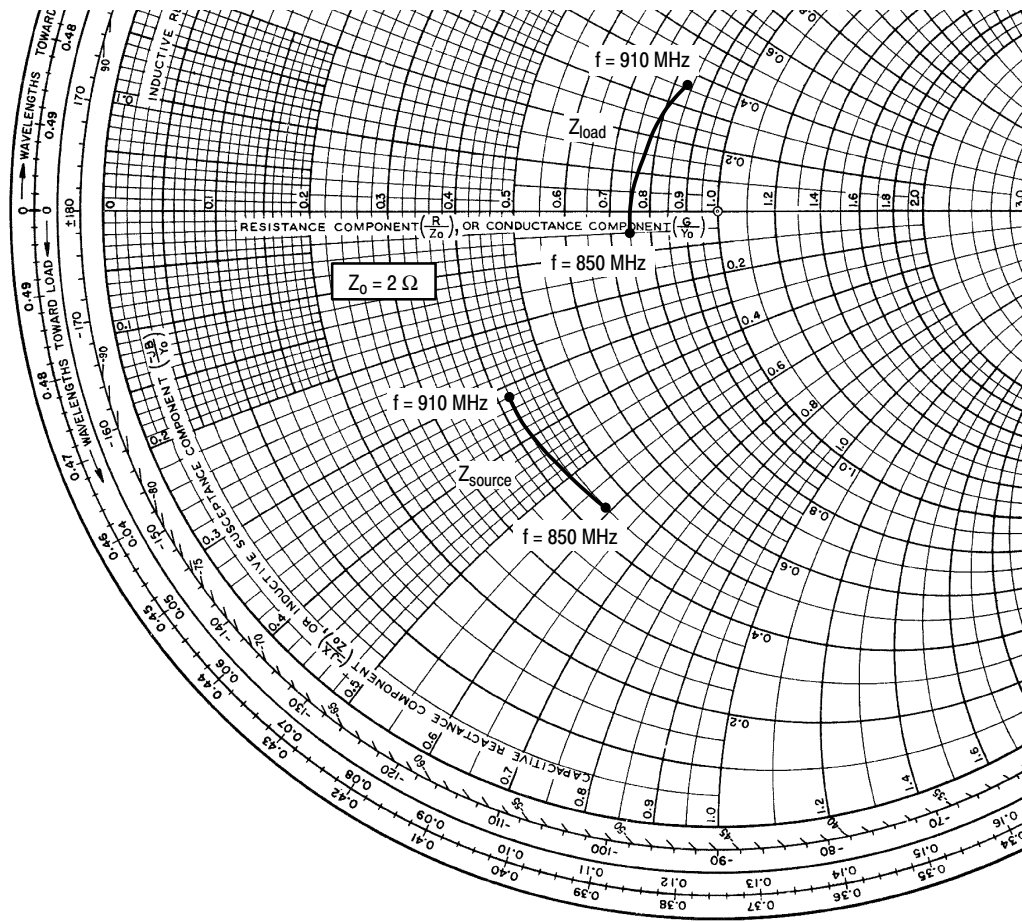

$V_{DD} = 28 \text{ Vdc}$ ,  $I_{DQ} = 950 \text{ mA}$ ,  $P_{out} = 27 \text{ W Avg.}$

| f<br>MHz | $Z_{source}$<br>$\Omega$ | $Z_{load}$<br>$\Omega$ |
|----------|--------------------------|------------------------|
| 850      | $0.89 - j1.18$           | $1.50 - j0.09$         |
| 865      | $0.87 - j1.03$           | $1.52 + j0.11$         |
| 880      | $0.85 - j0.89$           | $1.55 + j0.31$         |
| 895      | $0.83 - j0.75$           | $1.60 + j0.51$         |
| 910      | $0.84 - j0.64$           | $1.68 + j0.71$         |

$Z_{source}$  = Test circuit impedance as measured from gate to ground.

$Z_{load}$  = Test circuit impedance as measured from drain to ground.


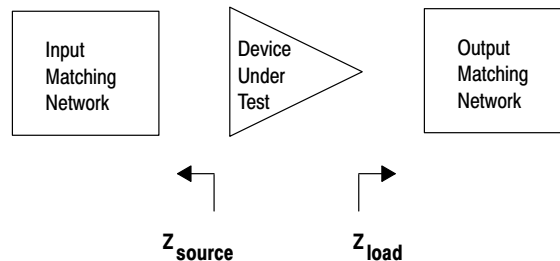


Figure 15. Series Equivalent Source and Load Impedance



# PACKAGE DIMENSIONS

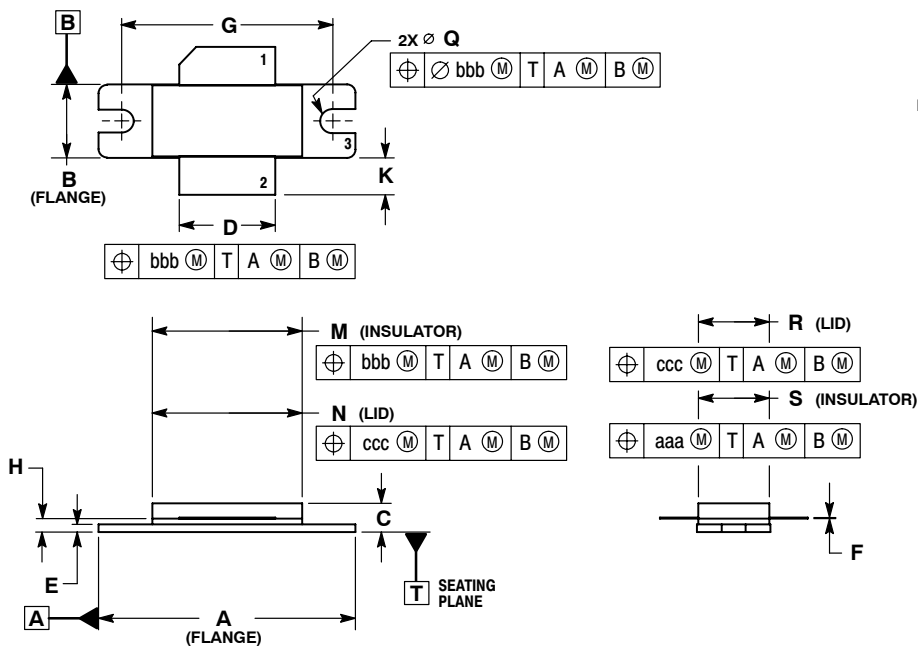


- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1994.
  2. CONTROLLING DIMENSION: INCH.
  3. DELETED
  4. DIMENSION H IS MEASURED 0.030 (0.762) AWAY FROM PACKAGE BODY.

| DIM | INCHES    |       | MILLIMETERS |        |
|-----|-----------|-------|-------------|--------|
|     | MIN       | MAX   | MIN         | MAX    |
| A   | 1.335     | 1.345 | 33.91       | 34.16  |
| B   | 0.380     | 0.390 | 9.65        | 9.91   |
| C   | 0.125     | 0.170 | 3.18        | 4.32   |
| D   | 0.495     | 0.505 | 12.57       | 12.83  |
| E   | 0.035     | 0.045 | 0.89        | 1.14   |
| F   | 0.003     | 0.006 | 0.08        | 0.15   |
| G   | 1.100 BSC |       | 27.94 BSC   |        |
| H   | 0.057     | 0.067 | 1.45        | 1.70   |
| K   | 0.170     | 0.210 | 4.32        | 5.33   |
| M   | 0.774     | 0.786 | 19.66       | 19.96  |
| N   | 0.772     | 0.788 | 19.60       | 20.00  |
| Q   | Ø.118     | Ø.138 | Ø.3.00      | Ø.3.51 |
| R   | 0.365     | 0.375 | 9.27        | 9.53   |
| S   | 0.365     | 0.375 | 9.27        | 9.52   |
| aaa | 0.005 REF |       | 0.127 REF   |        |
| bbb | 0.010 REF |       | 0.254 REF   |        |
| ccc | 0.015 REF |       | 0.381 REF   |        |

STYLE 1:  
PIN 1. DRAIN  
2. GATE  
3. SOURCE

**CASE 465-06**  
**ISSUE G**  
**NI-780**  
**MRF6S9130HR3**

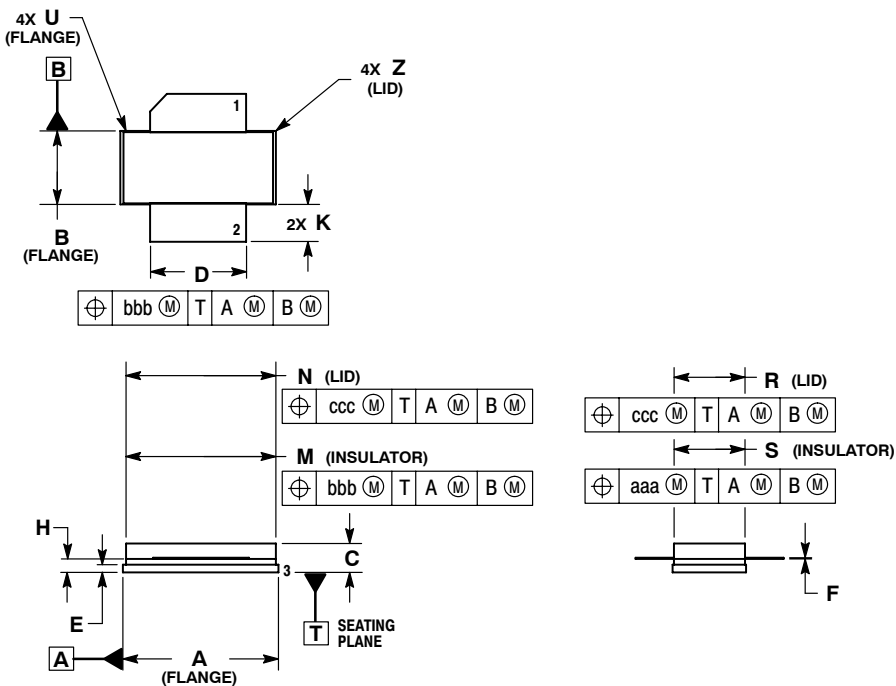

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1994.
  2. CONTROLLING DIMENSION: INCH.
  3. DELETED
  4. DIMENSION H IS MEASURED 0.030 (0.762) AWAY FROM PACKAGE BODY.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.805     | 0.815 | 20.45       | 20.70 |
| B   | 0.380     | 0.390 | 9.65        | 9.91  |
| C   | 0.125     | 0.170 | 3.18        | 4.32  |
| D   | 0.495     | 0.505 | 12.57       | 12.83 |
| E   | 0.035     | 0.045 | 0.89        | 1.14  |
| F   | 0.003     | 0.006 | 0.08        | 0.15  |
| H   | 0.057     | 0.067 | 1.45        | 1.70  |
| K   | 0.170     | 0.210 | 4.32        | 5.33  |
| M   | 0.774     | 0.786 | 19.61       | 20.02 |
| N   | 0.772     | 0.788 | 19.61       | 20.02 |
| R   | 0.365     | 0.375 | 9.27        | 9.53  |
| S   | 0.365     | 0.375 | 9.27        | 9.52  |
| U   | ---       | 0.040 | ---         | 1.02  |
| Z   | ---       | 0.030 | ---         | 0.76  |
| aaa | 0.005 REF |       | 0.127 REF   |       |
| bbb | 0.010 REF |       | 0.254 REF   |       |
| ccc | 0.015 REF |       | 0.381 REF   |       |

STYLE 1:  
PIN 1. DRAIN  
2. GATE  
5. SOURCE

**CASE 465A-06**  
**ISSUE H**  
**NI-780S**  
**MRF6S9130HSR3**

**MRF6S9130HR3 MRF6S9130HSR3**

## PRODUCT DOCUMENTATION

Refer to the following documents to aid your design process.

### Application Notes

- AN1955: Thermal Measurement Methodology of RF Power Amplifiers

### Engineering Bulletins

- EB212: Using Data Sheet Impedances for RF LDMOS Devices

## REVISION HISTORY

The following table summarizes revisions to this document.

| Revision | Date      | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|----------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5        | Aug. 2008 | <ul style="list-style-type: none"> <li>• Listed replacement part and Device Migration notification reference number, p. 1</li> <li>• Removed Lower Thermal Resistance and Low Gold Plating bullets from Features section as functionality is standard, p. 1</li> <li>• Removed Total Device Dissipation from Max Ratings table as data was redundant (information already provided in Thermal Characteristics table), p. 1</li> <li>• Operating Junction Temperature increased from 200°C to 225°C in Maximum Ratings table and related “Continuous use of maximum temperature will affect MTTF” footnote added, p. 1</li> <li>• Corrected <math>V_{DS}</math> to <math>V_{DD}</math> in the RF test condition voltage callout for <math>V_{GS(Q)}</math>, and added “Measured in Functional Test”, On Characteristics table, p. 2</li> <li>• Removed Forward Transconductance from On Characteristics table as it no longer provided usable information, p. 2</li> <li>• Updated PCB information to show more specific material details, Fig. 1, Test Circuit Schematic, p. 3</li> <li>• Updated Part Numbers in Table 5, Component Designations and Values, to latest RoHS compliant part numbers, p. 3</li> <li>• Removed lower voltage tests from Fig. 11, Power Gain versus Output Power, due to fixed tuned fixture limitations, p. 6</li> <li>• Replaced Fig. 12, MTTF versus Junction Temperature with updated graph. Removed Amps<sup>2</sup> and listed operating characteristics and location of MTTF calculator for device, p. 7</li> <li>• Added Product Documentation and Revision History, p. 10</li> </ul> |

## How to Reach Us:

### Home Page:

[www.freescale.com](http://www.freescale.com)

### Web Support:

<http://www.freescale.com/support>

### USA/Europe or Locations Not Listed:

Freescale Semiconductor, Inc.  
Technical Information Center, EL516  
2100 East Elliot Road  
Tempe, Arizona 85284  
1-800-521-6274 or +1-480-768-2130  
[www.freescale.com/support](http://www.freescale.com/support)

### Europe, Middle East, and Africa:

Freescale Halbleiter Deutschland GmbH  
Technical Information Center  
Schatzbogen 7  
81829 Muenchen, Germany  
+44 1296 380 456 (English)  
+46 8 52200080 (English)  
+49 89 92103 559 (German)  
+33 1 69 35 48 48 (French)  
[www.freescale.com/support](http://www.freescale.com/support)

### Japan:

Freescale Semiconductor Japan Ltd.  
Headquarters  
ARCO Tower 15F  
1-8-1, Shimo-Meguro, Meguro-ku,  
Tokyo 153-0064  
Japan  
0120 191014 or +81 3 5437 9125  
[support.japan@freescale.com](mailto:support.japan@freescale.com)

### Asia/Pacific:

Freescale Semiconductor China Ltd.  
Exchange Building 23F  
No. 118 Jianguo Road  
Chaoyang District  
Beijing 100022  
China  
+86 10 5879 8000  
[support.asia@freescale.com](mailto:support.asia@freescale.com)

### For Literature Requests Only:

Freescale Semiconductor Literature Distribution Center  
P.O. Box 5405  
Denver, Colorado 80217  
1-800-441-2447 or +1-303-675-2140  
Fax: +1-303-675-2150  
[LDCForFreescaleSemiconductor@hibbertgroup.com](mailto:LDCForFreescaleSemiconductor@hibbertgroup.com)

Information in this document is provided solely to enable system and software implementers to use Freescale Semiconductor products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

Freescale Semiconductor reserves the right to make changes without further notice to any products herein. Freescale Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Freescale Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in Freescale Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals", must be validated for each customer application by customer's technical experts. Freescale Semiconductor does not convey any license under its patent rights nor the rights of others. Freescale Semiconductor products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Freescale Semiconductor product could create a situation where personal injury or death may occur. Should Buyer purchase or use Freescale Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold Freescale Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Freescale Semiconductor was negligent regarding the design or manufacture of the part.

Freescale™ and the Freescale logo are trademarks of Freescale Semiconductor, Inc. All other product or service names are the property of their respective owners.

© Freescale Semiconductor, Inc. 2005-2006, 2008. All rights reserved.