ON Semiconductor®

FPF2193 / FPF2194 / FPF2195
Full-Function Load Switch with Adjustable Current Limit

Features

- <1.8 to 5.5 V Input Voltage Range
- Controlled Turn-On
- 0.1 to 1.5 A Adjustable Current Limit
- Under-Voltage Lockout
- Thermal Shutdown
- <2 µA Shutdown Current
- Auto Restart
- Fast Current Limit Response Time
- 5 µs to Moderate Over Currents
- 30 ns to Hard Shorts
- Fault Blanking
- Reverse Current Blocking

Applications

- PDAs
- Cell Phones
- Handheld GPS Devices
- Portable Enterprise / Industrial Devices
- Digital Cameras
- Peripheral Ports and Accessories
- Portable Medical Equipment
- Hot Swap Supplies

Description

The FPF2193, FPF2194, and FPF2195 form a series of load switches that provides full protection to systems and loads that may encounter large current conditions. These devices contain a 55 mΩ current-limited P-channel MOSFET that can operate over an input voltage range of 1.8 to 5.5 V. Internally, current is prevented from flowing when the MOSFET is off and the output voltage is higher than the input voltage. Switch control is by a logic input (ON) capable of interfacing directly with low-voltage control signals. Each part contains thermal shutdown protection that shuts off the switch to prevent damage to the part when a continuous over-current condition causes excessive heating.

When the switch current reaches the current limit, the parts operate in a constant-current mode to prohibit excessive currents from causing damage. For the FPF2193 and FPF2194, if the constant current condition still persists after 30 ms, the parts shut off the switch and pull the fault signal pin (FLAGB) LOW. The FPF2193 has an auto-restart feature that turns the switch on again after 450 ms if the ON pin is still active. The FPF2194 does not have this auto-restart feature, so the switch remains off until the ON pin is cycled. The FPF2195 does not turn off after a current limit fault, but remains in the constant-current mode indefinitely. The minimum current limit can be set as low as 45 mA.

These parts are available in a space-saving six ball advanced 0.98 x 1.48 mm WLCSP package.

Ordering Information

Part Number	Current Limit [mA]	Current Limit Blanking Time [ms]	Auto-Restart Time [ms]	ON Pin Activity	Top Mark
FPF2193	100-1500	15/30/60	225/450/900	Active HIGH	S6
FPF2194		15/30/60	NA		S7
FPF2195		0	NA		S9
FPF2195BUCX	45-1500	0	NA		SY

© 2009 Semiconductor Components Industries, LLC.
December-2017, Rev. 2

Publication Order Number:
FPF2194/D

Application Diagram

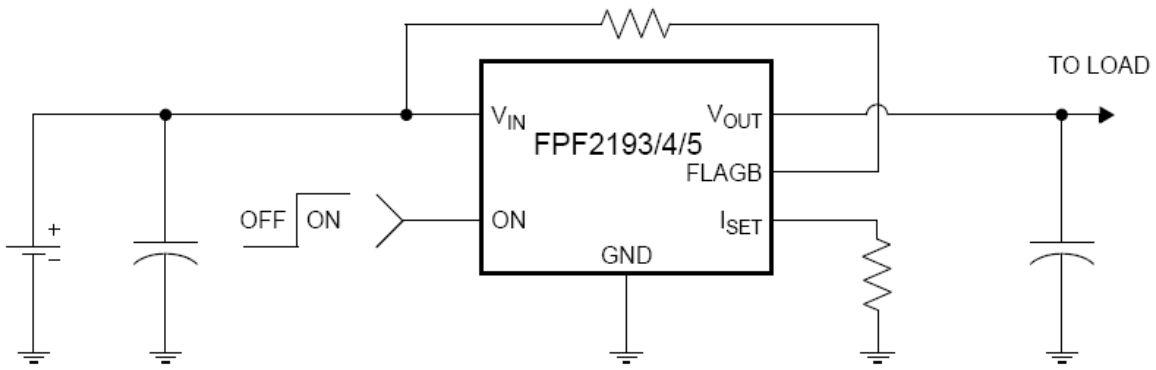


Figure 1. Typical Application

Block Diagram

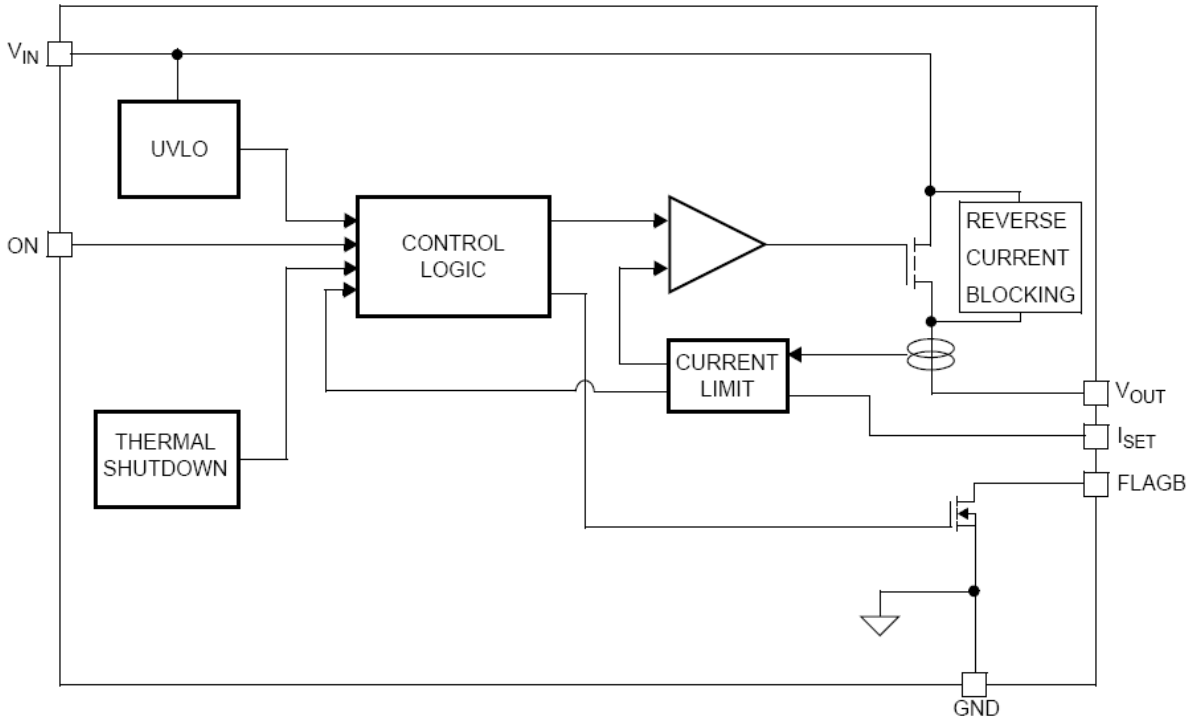


Figure 2. Functional Block Diagram

Pin Configuration

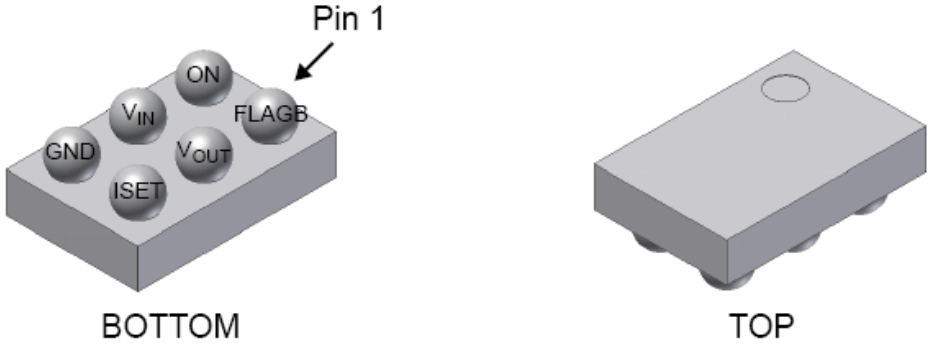


Figure 3. 1.0 x 1.5 mm Chip-Scale Package

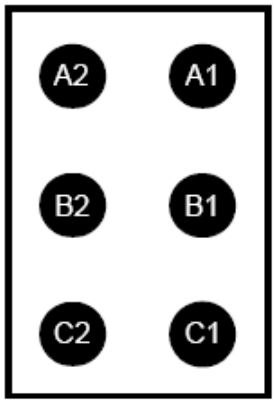


Figure 4. Pin Configuration (Bottom View)

Pin Definitions

Pin #	Name	Description
C1	I_{SET}	Current Limit Set Input. A resistor from I_{SET} to ground sets the current limit for the switch.
B2	V_{IN}	Supply Input. Input to the power switch and the supply voltage for the IC.
B1	V_{OUT}	Switch Output. Output of the power switch.
A1	FLAGB	Fault Output. Active LOW, open-drain output that indicates an over-current supply, under-voltage, or over-temperature state.
C2	GND	Ground.
A2	ON	ON control input, active HIGH.

Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Symbol	Parameter		Min.	Max.	Unit
	V_{IN}, V_{OUT}, ON, FLAGB, ISET to GND		-0.3	6.0	V
P_D	Power Dissipation at T_A = 25°C[1]			1.2	W
TJ	Operating Temperature Range		-40	+125	°C
T_{STG}	Storage Temperature		-65	+150	°C
Θ_{JA}	Thermal Resistance, Junction to Ambient			85	°C/W
ESD	Electrostatic Discharge Capability	Human Body Model, JESD22-A114	8000		V
		Machine Model, JESD22-A115	400		

Note:

1. Package power dissipation on one-square inch pad, two-ounce copper board.

Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. ON Semiconductor does not recommend exceeding them or designing to Absolute Maximum Ratings.

Symbol	Parameter	Min.	Max.	Unit
V_{IN}	Input Voltage	1.8	5.5	V
T_A	Ambient Operating Temperature	-40	+85	°C

Electrical Characteristics

V_{IN} = 1.8 to 5.5 V, T_A = -40 to +85°C unless otherwise noted. Typical values are at V_{IN} = 3.3 V and T_A = 25°C.

Symbol	Parameter	Conditions		Min.	Typ.	Max.	Units
Basic Operation							
V_{IN}	Operating Voltage			1.8		5.5	V
I_Q	Quiescent Current	I_{OUT}=0 mA, V_{ON}=V_{IN}	V_{IN}=1.8 V		70		µA
			V_{IN}=3.3 V		75		
			V_{IN}=5.5 V		80		
R_{ON}	On Resistance	T_A=25°C, I_{OUT}=200 mA			55	80	mΩ
		T_A=-40 to 85°C, I_{OUT}=200 mA				135	
V_{IH}	On Input Logic High Voltage ON	V_{IN}=1.8 V		0.8			V
		V_{IN}=5.5 V		1.4			
V_{IL}	On Input Logic Low Voltage	V_{IN}=1.8 V				0.5	V
		V_{IN}=5.5 V				1.0	
I_{IN}	On Input Leakage	V_{ON}=V_{IN} or GND		-1	0	1	µA
V_{IN_SD}	V_{IN} Shutdown Current	V_{ON}=0 V, V_{IN}=5.5 V, V_{OUT}=Short to GND		-2		2	µA
V_{FLB_L}	FLAGB Output Logic Low Voltage	V_{IN}=5 V, I_{SINK}=10 mA			0.05	0.20	V
		V_{IN}=1.8 V, I_{SINK}=10 mA			0.12	0.30	
I_{FLB_H}	FLAGB Output Logic High Leakage Current	V_{IN}=5 V, Switch ON				1	µA
Reverse Block							
I_{SDT}	V_{OUT} Shutdown Current	V_{ON}=0 V, V_{OUT}=5.5 V, V_{IN}=Short-to-GND		-2		2	µA
$V_{breakdown}$	Reverse Breakdown Voltage	V_{IN}=V_{ON}=0 V, I_{OUT}=200 µA			9		V
Protections							
I_{LIM}	Current Limit	V_{IN}=3.3 V, V_{OUT}=3.0 V, R_{SET}=690 Ω		600	800	1000	mA
	Current Limit for FPF2195BUCX	V_{IN}=4.5 V, V_{OUT}=4.2 V, R_{SET}=15.8 KΩ		35	45	60	mA
$I_{LIM(MIN)}$	Minimum Current Limit	V_{IN}=3.3 V, V_{OUT}=3.0 V, R_{SET}=5516 Ω			100		ma
T_{SD}	Thermal Shutdown	Shutdown Threshold			140		°C
		Return from Shutdown			130		
		Hysteresis			10		
V_{UVLO}	Under-Voltage Lockout	V_{IN} Increasing		1.55	1.65	1.75	V
V_{UVLO_HYST}	Under-Voltage Lockout Hysteresis				50		mV
Dynamic							
td_{ON}	Delay On Time	R_L=500 Ω, C_L=0.1 µF			20		µs
t_R	V_{OUT} Rise Time	R_L=500 Ω, C_L=0.1 µF			20		µs
t_{ON}	Turn-On Time	R_L=500 Ω, C_L=0.1 µF			40		µs
td_{OFF}	Delay Off Time	R_L=500 Ω, C_L=0.1 µF			15		µs
t_F	V_{OUT} Fall Time	R_L=500 Ω, C_L=0.1 µF			110		µs
t_{OFF}	Turn-Off Time	R_L=500 Ω, C_L=0.1 µF			125		µs
t_{BLANK}	Over-Current Blanking Time	FPF2193, FPF2194		15	30	60	ms
t_{RSTRT}	Auto-Restart	FPF2193 Only		225	450	900	ms
t_{SC}	Short-Circuit Response Time	V_{IN}=V_{OUT}=3.3 V, Moderate Over-Current Condition			5		µs
		V_{IN}=V_{OUT}=3.3 V, Hard Short			30		ns

Typical Performance Characteristics

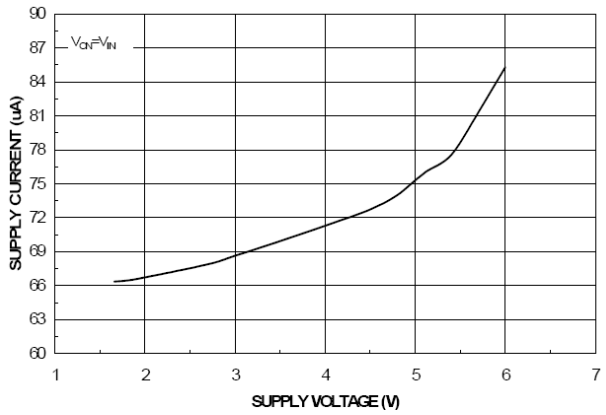


Figure 5. Quiescent Current vs. Input Voltage

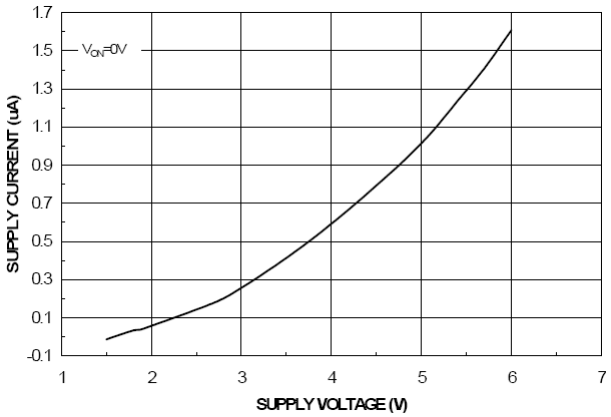


Figure 6. Quiescent Current vs. Input Voltage

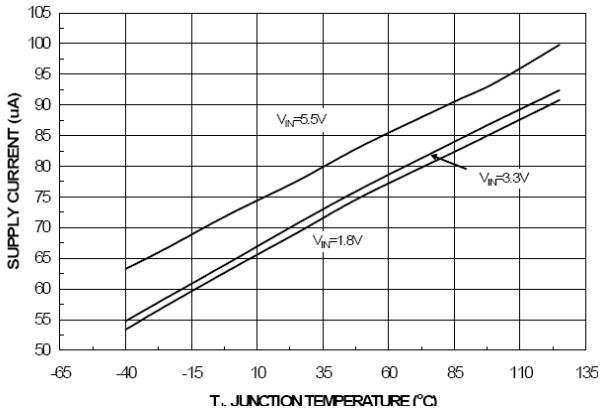


Figure 7. Quiescent Current vs. Temperature

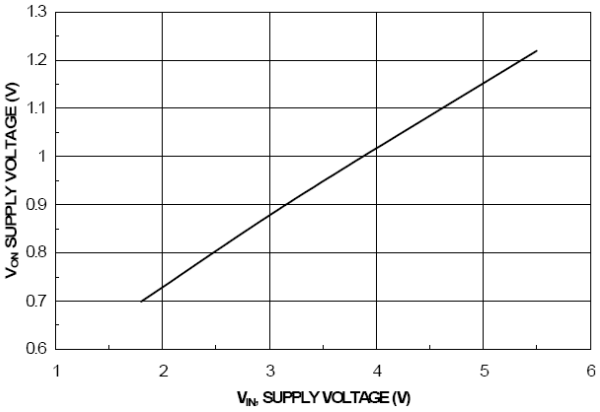


Figure 8. V_{ON} High Voltage vs. Input Voltage

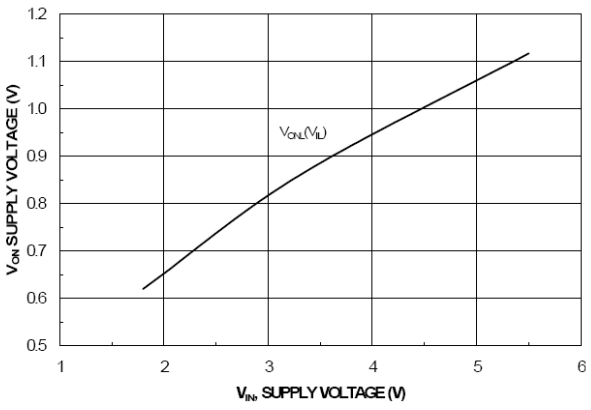


Figure 9. V_{ON} Low Voltage vs. Input Voltage

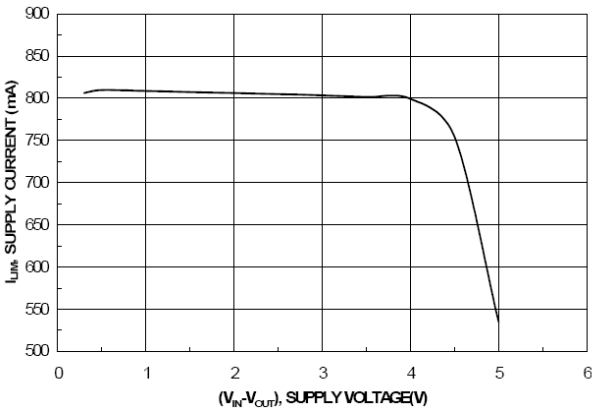


Figure 10. Current Limit vs. Output Voltage

Typical Performance Characteristics (Continued)

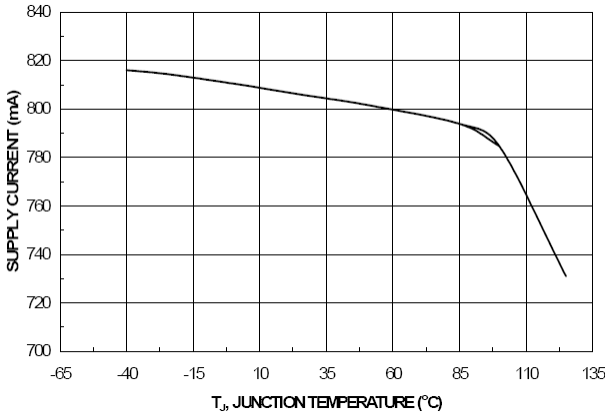


Figure 11. Current Limit vs. Temperature

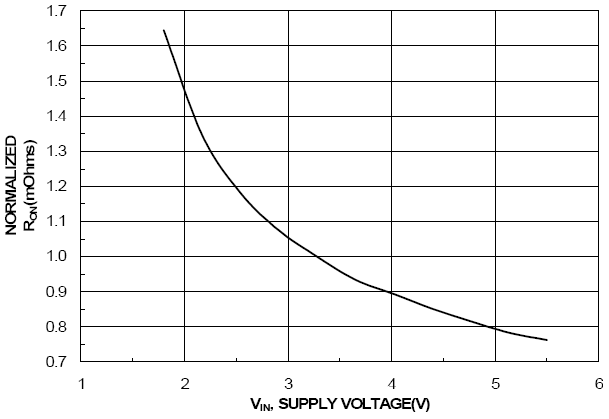


Figure 12. R_{ON} vs. V_{IN}

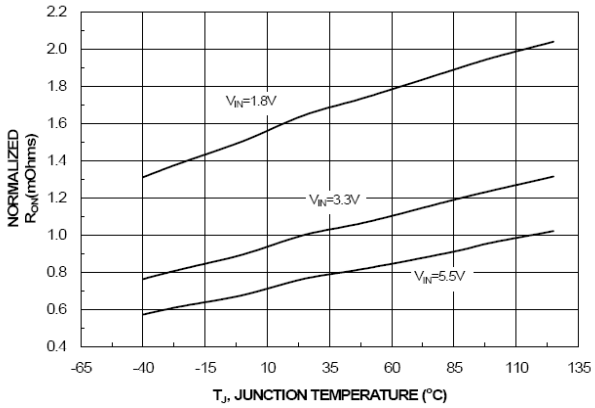


Figure 13. R_{ON} vs. Temperature

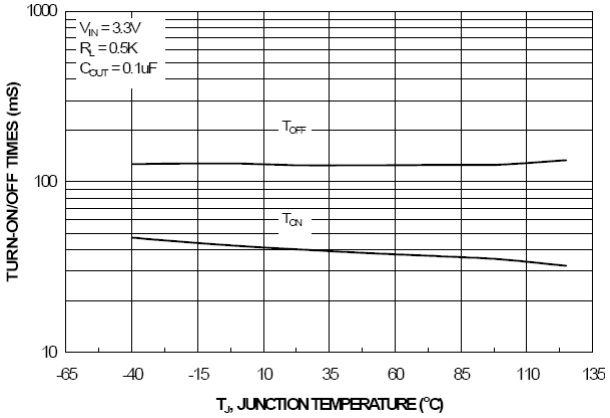


Figure 14. t_{ON} / t_{OFF} vs. Temperature

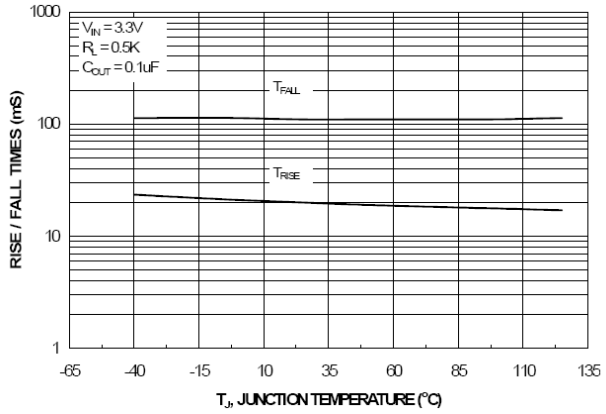


Figure 15. t_{RISE} / t_{FALL} vs. Temperature

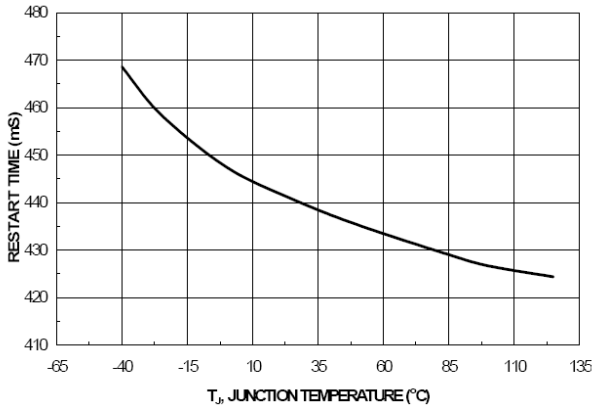


Figure 16. t_{RSTRT} vs. Temperature

Typical Performance Characteristics (Continued)

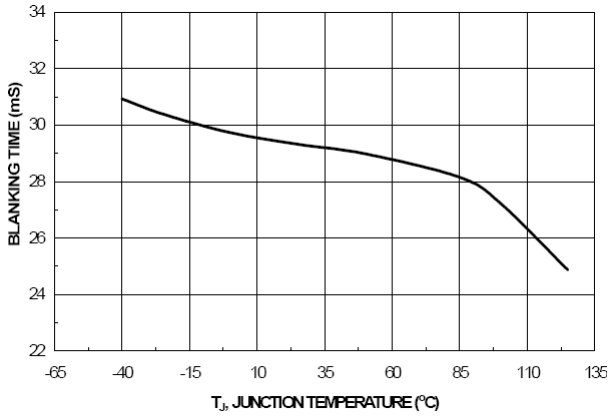


Figure 17. t_{BLANK} vs.Temperature

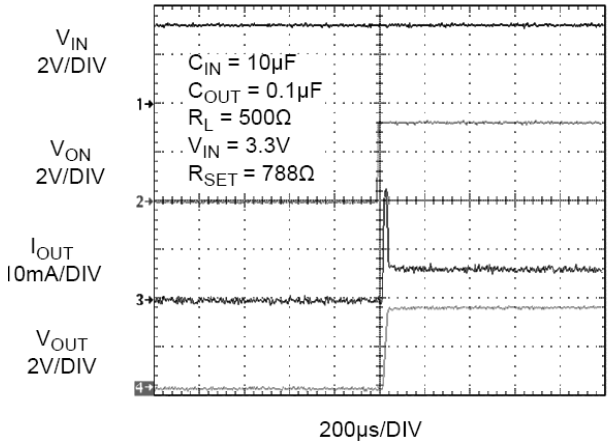


Figure 18. t_{ON} Response

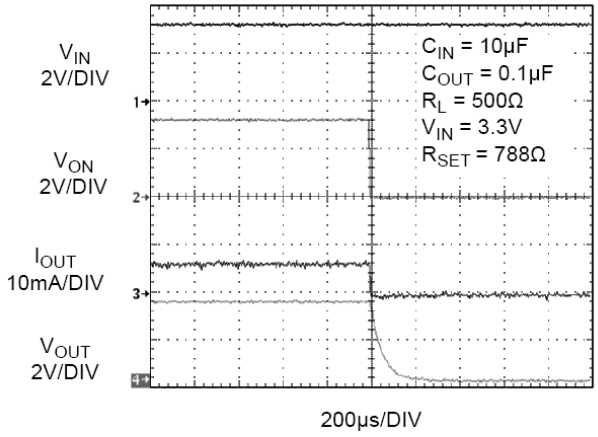


Figure 19. t_{OFF} Response

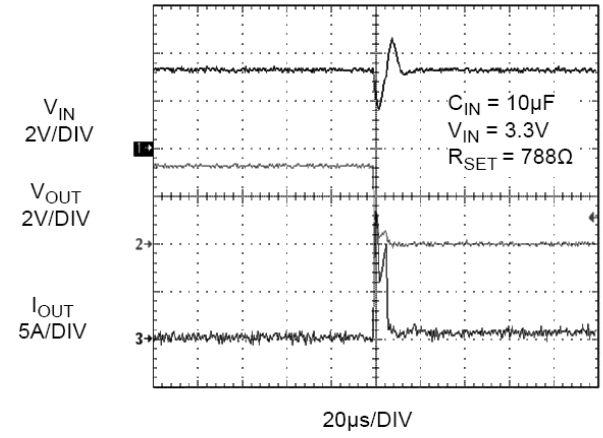


Figure 20. Short-Circuit Response Time (Output Shorted to GND)

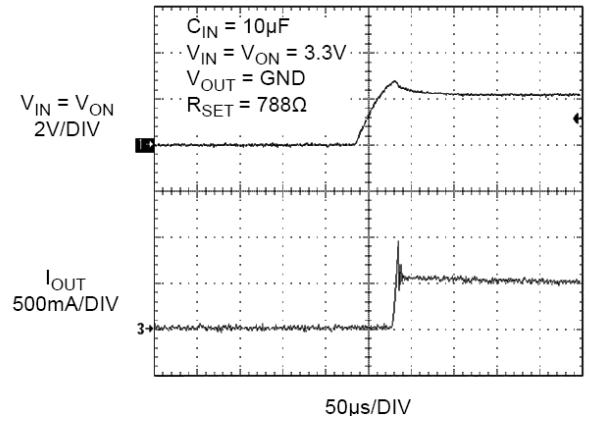


Figure 21. Current Limit Response Time (Switch is Powered into a Short)

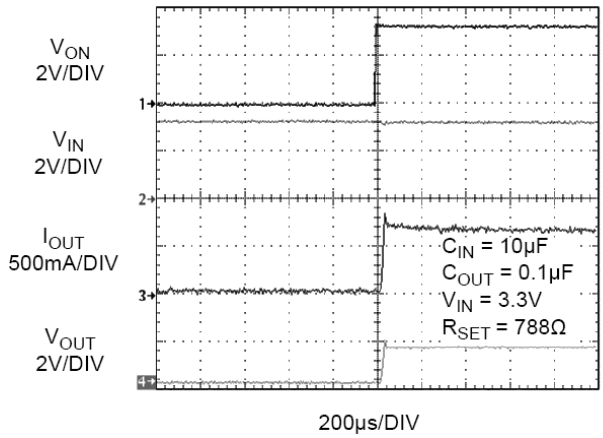


Figure 22. Current Limit Response Time (Output is Loaded by 2.2 Ω, C_{OUT}=0.1 µF)

Typical Performance Characteristics (Continued)

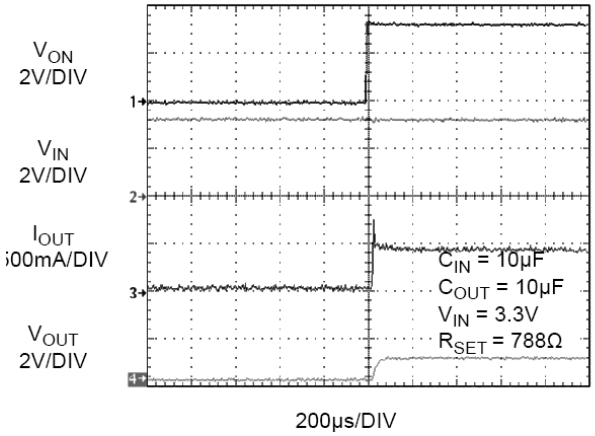


Figure 23. Current Limit Response Time (Output is Loaded by 2.2 Ω, C_{OUT}=10 µF)

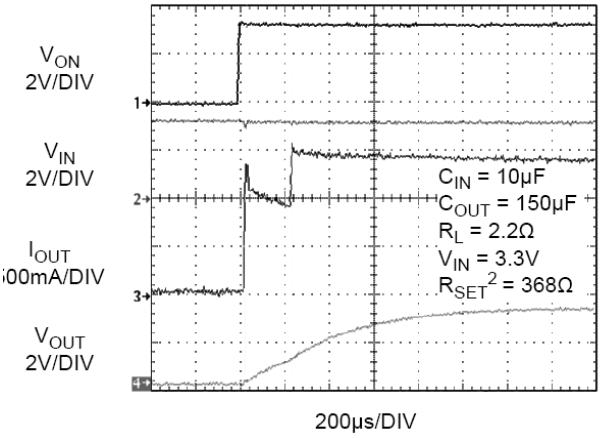


Figure 24. Short-Circuit Detection Function[2]

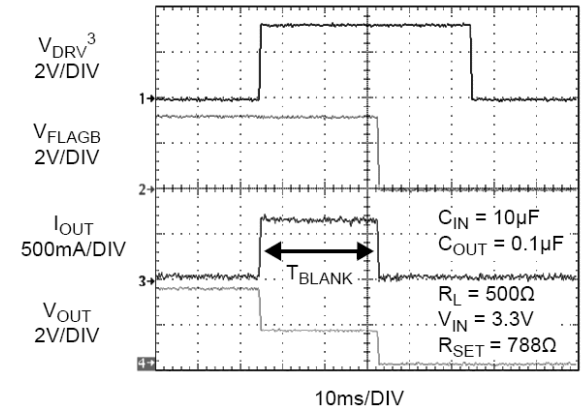


Figure 25. t_{BLANK} vs. Response[3]

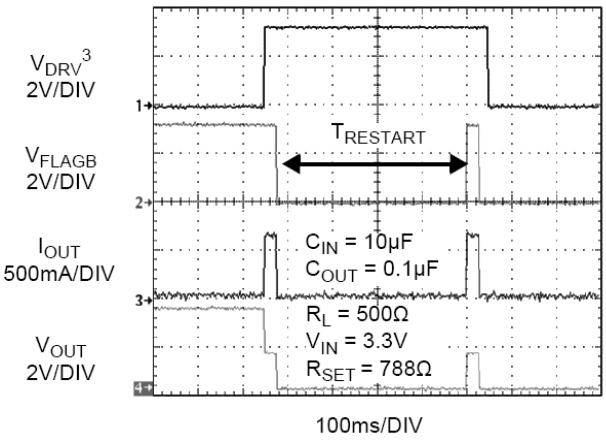


Figure 26. $t_{RESTART}$ vs. Response[3]

Notes:

2. When the output voltage is below V_{SCTH}=1.1 V, the current limit value is set at 62.5% of the current limit value.
3. V_{DRV} signal forces the device to go into over-current condition by loading.

Functional Description

The FPF2193, FPF2194, and FPF2195 are current-limited switches that protect systems and loads that can be damaged or disrupted by the application of high currents. The core of each device is a 55 mΩ P-channel MOSFET and a controller capable of functioning over the wide input operating range of 1.8- 5.5 V. The controller protects against system malfunctions through current limiting, under-voltage lockout, and thermal shutdown. The current limit is adjustable from 100 mA (45 mA for FPF2195BUCX) to 1.5 A through the selection of an external resistor.

On/Off Control

The ON pin controls the state of the switch. When ON is HIGH, the switch is in ON state. Activating ON continuously holds the switch in the ON state so long as there is no fault. For all versions, an under-voltage on V_{IN} or a junction temperature in excess of 140°C overrides the ON control to turn off the switch. In addition, excessive currents cause the switch to turn off in the FPF2193 and FPF2194. The FPF2193 has an auto-restart feature that automatically turns the switch on again after 450 ms. For the FPF2194, the ON pin must be toggled to turn the switch on again. The FPF2195 does not turn off in response to an over-current condition, but remains operating in constant-current mode as long as ON is active and the thermal shutdown or under-voltage lockout have not activated.

Fault Reporting

Upon the detection of an over-current, input under-voltage, or over-temperature condition, FLAGB signals the fault mode by activating LOW. For the FPF2193 and FPF2194, the FLAGB goes LOW at the end of the blanking time, while FLAGB goes LOW immediately for the FPF2195. FLAGB remains LOW through the auto-restart time for the FPF2195. For the FPF2194, FLAGB is latched LOW and ON must be toggled to release it. With the FPF2195, FLAGB is LOW during the faults and immediately returns HIGH at the end of the fault condition. FLAGB is an open-drain MOSFET that requires a pull-up resistor between V_{IN} and FLAGB. During shutdown, the pull-down on FLAGB is disabled to reduce current draw from the supply.

Current Limiting

The current limit ensures that the current through the switch doesn't exceed a maximum value, while not limiting at less than a minimum value. The current at which the parts limit is adjustable through the selection of an external resistor connected to I_{SET}. Information for selecting the resistor is found in the Application Information section. The FPF2193 and FPF2194 have a blanking time of 30 ms, nominally, during which the switch acts as a constant current source. At the end of the blanking time, the switch is turned off. The FPF2195 has no current limit blanking period, so it remains in a constant current state until the ON pin is deactivated or the thermal shutdown turns off the switch.

For preventing the switch from large power dissipation during heavy load, a short-circuit detection feature is introduced. Short-circuit condition is detected by, observing the output voltage. The switch is put into short-circuit current-limiting mode if the switch is loaded with a heavy load. When the output voltage drops below V_{SCTH}, the short-circuit detection threshold voltage, the current limit value is re-conditioned and the short-circuit current-limit value is decreased to 62.5% of the current limit value. This keeps the power dissipation of the part below a certain limit even at dead-short conditions at 5.5 V input voltage. The V_{SCTH} value is set to be 1 V. At around 1.1 V of output voltage, the switch is removed from short-circuit current-limiting mode and the current limit is set to the current limit value.

Under-Voltage Lockout (UVLO)

The under-voltage lockout turns the switch off if the input voltage drops below the under-voltage lockout threshold. With the ON pin active, the input voltage rising above the under-voltage lockout threshold causes a controlled turn-on of the switch, which limits current over shoot.

Thermal Shutdown

The thermal shutdown protects the die from internally or externally generated excessive temperatures. During an over-temperature condition, FLAGB is activated and the switch is turned off. The switch automatically turns on again if temperature of the die drops below the threshold temperature.

Reverse-Current Blocking

The entire FPF2193/94/95 family has a reverse current blocking feature that protects the input source against current flow from output to input. For a standard USB power design, this is an important feature to protect the USB host from being damaged due to reverse current flow on V_{BUS}.

When the load switch is OFF, no current flows from the output to the input. If the switch is turned on and the output voltage is greater than input voltage, this feature is activated and turns off the switch. This prevents any current flow from output to input. The reverse-current blocking feature is deactivated if the V_{OUT} - V_{IN} is smaller than a typically 50 mV threshold. During this time, some current (50 mV/R_{ON}) flows from the output to input until input voltage becomes greater than output voltage. FLAGB operation is independent of the reverse-current blocking and does not report a fault condition if this feature is activated.

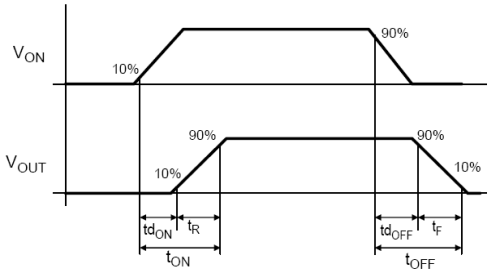


Figure 27. Timing Diagram

where:
td_{ON} = Delay On Time
t_R = V_{OUT} Rise Time
t_{ON} = Turn-On Time
td_{OFF} = Delay Off Time
t_F = V_{OUT} Fall Time
t_{OFF} = Turn-Off Time

Application Information

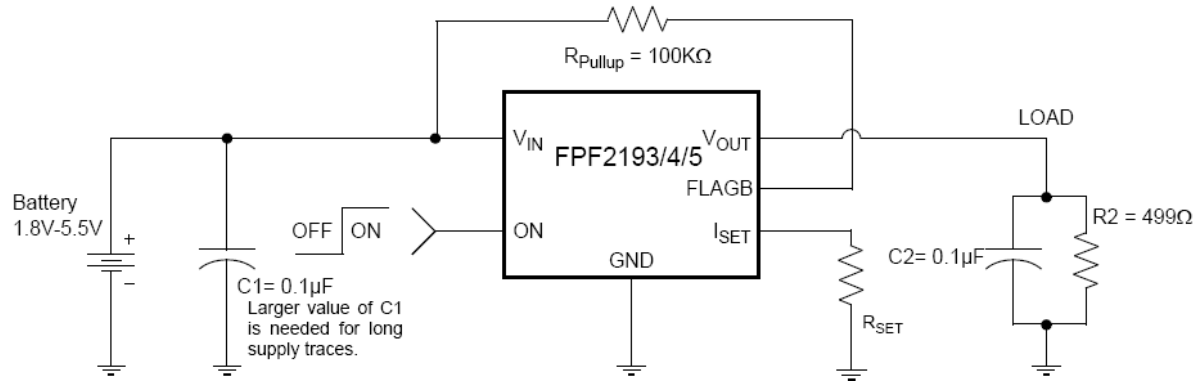


Figure 28. Typical Application

Setting Current Limit

The FPF2193, FPF2194, and FPF2195 current limit is set with an external resistor connected between I_{SET} and GND. This resistor is selected using the following equation:

$$R_{SET} = \frac{551.6}{I_{LIM}} \quad (1)$$

R_{SET} is in Ω and I_{SET} is in Amps.

Table 1 can also be used to select R_{SET}. A typical application would be the 500 mA current required by a single USB port. Using Table 1, an appropriate selection for the R_{SET} resistor would be 788 Ω. This ensures that the port load could draw 525 mA, but not more than 875 mA. Likewise for a dual-port system; an R_{SET} of 368 Ω always delivers at least 1125 mA and never more than 1875 mA.

Table 1. Current Limit Various R_{SET} Values

R_{SET}(Ω)	Min. Current Limit (mA)	Typ. Current Limit (mA)	Max. Current Limit (mA)
368	1125	1500	1875
441	928	1250	1562
552	750	1000	1250
613	675	900	1125
690	600	800	1000
788	525	700	875
919	450	600	750
1103	375	500	625
1226	338	450	563
1379	300	400	500
1576	263	350	438
1839	225	300	375
2206	188	250	313
2758	150	200	250
3677	113	150	188
5516	75	100	125
15800[4]	35	45	60

Note:
4. FPF2195BUCX only.

Input Capacitor

To limit the voltage drop on the input supply caused by transient inrush currents when the switch is turned on into a discharged load capacitor or a short-circuit, a capacitor needs to be placed between V_{IN} and GND. A 0.1 µF ceramic capacitor, C_{IN}, placed close to the pins is usually sufficient. Higher values of C_{IN} can be used to further reduce the voltage drop.

Output Capacitor

A 0.1 µF capacitor, C_{OUT}, should be placed between V_{OUT} and GND. This capacitor prevents parasitic board inductances from forcing V_{OUT} below GND when the switch turns off. For the FPF2193 and FPF2194, the total output capacitance needs to be kept below a maximum value, C_{OUT}(max), to prevent the part from registering an over-current condition and turning off the switch. The maximum output capacitance can be determined from the following formula:

$$C_{OUT}(max) = \frac{I_{LIM}(max) \times t_{BLANK}(min)}{V_{IN}} \quad (2)$$

Power Dissipation

During normal operation as a switch, the power dissipated depends upon the level at which the current limit is set. The maximum allowed setting for the current limit is 1.5 A and results in a power dissipation of:

$$P = (I_{LIM})^2 \times R_{ON} = (1.5)^2 \times 0.055 = 123.75mW \quad (3)$$

If the part goes into current limit, the maximum power dissipation occurs when the output is shorted to ground. For the FPF2193, the power dissipation scales by the auto-restart time, t_{RSTRT}, and the over-current blanking time, t_{BLANK}, so that the maximum power dissipated is:

$$P(max) = \frac{t_{BLANK}}{t_{BLANK} + t_{RSTRT}} \times V_{IN}(max) \times I_{LIM}(max) = \frac{30}{30 + 450} \times 5.5 \times 1.5 = 515.6mW \quad (4)$$

This is more power than the package can dissipate, but the thermal shutdown of the part activates to protect the part from damage due to excessive heating. When using the FPF2194, attention must be given to the manual resetting of the part. The junction temperature is only able to increase to the thermal shutdown threshold. Once this temperature has been reached, toggling ON does not turn the switch on until the junction temperature drops. For the FPF2195, a short on the output causes the part to operate in a constant-current state, dissipating a worst-case power of:


$$P(max) = V_{IN}(max) \times I_{LIM}(max) = 5.5 \times 1.5 = 8.25W \quad (5)$$

This large amount of power activates the thermal shutdown and the part cycles in and out of thermal shutdown as long as the ON pin is active and the short is present.


Board Layout

For best performance, all traces should be as short as possible. To be most effective, the input and output capacitors should be placed close to the device to minimize the effects that parasitic trace inductances may have on normal and short-circuit operation. Using wide traces for V_{IN}, V_{OUT}, and GND help to minimize parasitic electrical effects along with minimizing the case-to-ambient thermal impedance.


Physical Dimensions

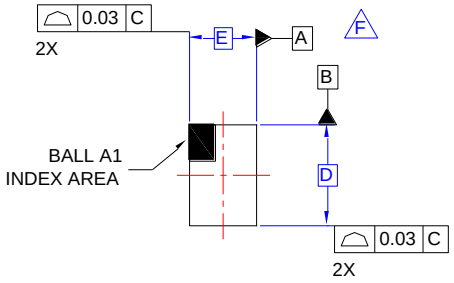


TOP VIEW

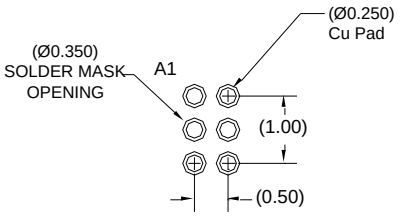


RECOMMENDED LAND PATTERN
(NSMD PAD TYPE)

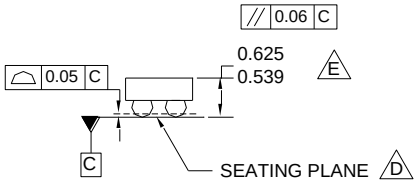



SIDE VIEWS

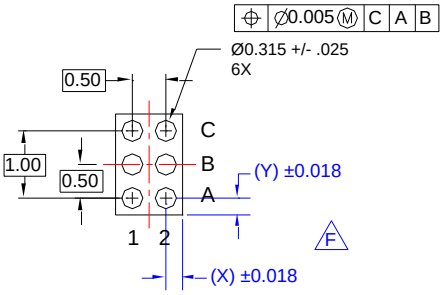

BOTTOM VIEW

NOTES:

A. NO JEDEC REGISTRATION APPLIES.

B. DIMENSIONS ARE IN MILLIMETERS.

C. DIMENSIONS AND TOLERANCE PER ASMEY14.5M, 1994.

D. DATUM C IS DEFINED BY THE SPHERICAL CROWNS OF THE BALLS.

E. PACKAGE NOMINAL HEIGHT IS 582 MICRONS ±43 MICRONS (539-625 MICRONS).

F. FOR DIMENSIONS D, E, X, AND Y SEE PRODUCT DATASHEET.

G. DRAWING FILNAME: MKT-UC006AFrev2.

Figure 29. 6-Ball, Wafer-Level Chip-Scale Package (WLCSP)

D	E	X	Y
1.480±0.030	0.980±0.030	0.240	0.240

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada.
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative