



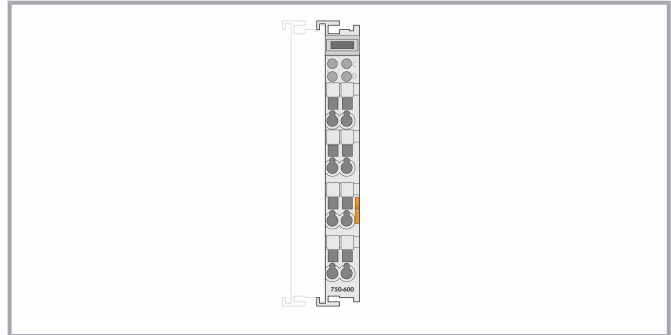

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

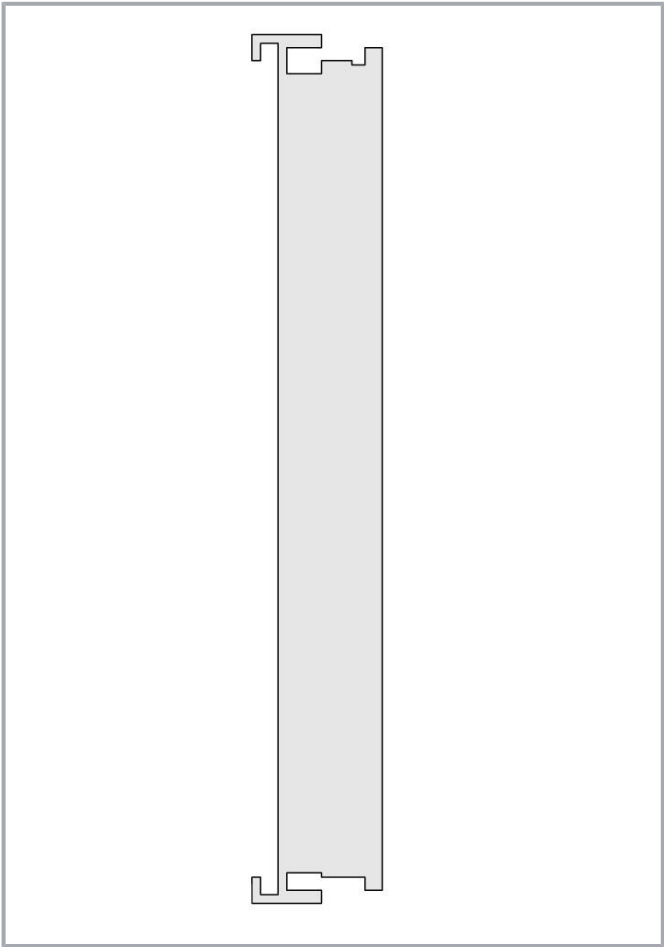

Item description

An end module must be snapped onto the assembly at the end of a fieldbus node.  
The end module completes the internal data bus, ensuring flawless data transmission.

Data  
Technical data

|                         |   |
|-------------------------|---|
| Supply voltage (system) | ) |
|-------------------------|---|

Physical data

|        |                      |
|--------|----------------------|
| Width  | 12 mm / 0.472 inch   |
| Height | 100 mm / 3.937 inch  |
| Depth  | 69.8 mm / 2.748 inch |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



|                                   |                      |
|-----------------------------------|----------------------|
| Depth from upper edge of DIN-rail | 62.6 mm / 2.465 inch |
|-----------------------------------|----------------------|

## Mechanical data

|               |             |
|---------------|-------------|
| Mounting type | DIN-35 rail |
|---------------|-------------|

## Material data

|                    |                              |
|--------------------|------------------------------|
| Color              | light gray                   |
| Housing material   | Polycarbonate; polyamide 6.6 |
| Fire load          | 0.906 MJ                     |
| Weight             | 32.1 g                       |
| Conformity marking | CE                           |

## Environmental requirements

|                                                                                    |                                                                                                                                                                                                   |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Surrounding air temperature (operation)                                            | -20 ... 60 °C                                                                                                                                                                                     |
| Surrounding air temperature (storage)                                              | -40 ... 85 °C                                                                                                                                                                                     |
| Protection type                                                                    | IP20                                                                                                                                                                                              |
| Pollution degree (5)                                                               | 2 per IEC 61131-2                                                                                                                                                                                 |
| Operating altitude                                                                 | 0 ... 2000 m                                                                                                                                                                                      |
| Mounting position                                                                  | horizontal (standing/lying); vertical                                                                                                                                                             |
| Relative humidity (without condensation)                                           | 95 %                                                                                                                                                                                              |
| Relative humidity (with condensation)                                              | Short-term condensation per Class 3K6/IEC EN 60721-3-3 and E-DIN 40046-721-3, accounting for a temperature range of -20 to +60 °C (except for wind-driven precipitation, water and ice formation) |
| Vibration resistance                                                               | 4g per IEC 60068-2-6                                                                                                                                                                              |
| Shock resistance                                                                   | 15g per IEC 60068-2-27                                                                                                                                                                            |
| EMC immunity to interference                                                       | per EN 61000-6-2, marine applications                                                                                                                                                             |
| EMC emission of interference                                                       | per EN 61000-6-3, marine applications                                                                                                                                                             |
| Exposure to pollutants                                                             | Per IEC 60068-2-42 and IEC 60068-2-43                                                                                                                                                             |
| Permissible H <sub>2</sub> S contaminant concentration at a relative humidity 75 % | 10 ppm                                                                                                                                                                                            |
| Permissible SO <sub>2</sub> contaminant concentration at a relative humidity 75 %  | 25 ppm                                                                                                                                                                                            |

## Commercial data

|                |                 |
|----------------|-----------------|
| Product Group  | 15 (Remote I/O) |
| PU (SPU)       | 1 Stück         |
| Packaging type | box             |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



|                       |               |
|-----------------------|---------------|
| Country of origin     | DE            |
| GTIN                  | 4050821088776 |
| Customs tariff number | 85389091890   |

## Approvals / Certificates

### Ex-Approvals

| Logo | Approval                                                          | Additional Approval Text | Certificate name                |
|------|-------------------------------------------------------------------|--------------------------|---------------------------------|
|      | <b>ATEX</b><br>TUEV Nord Cert GmbH                                | EN 60079-0               | TÜV 07 ATEX<br>554086 X en.     |
|      | <b>CCCEX</b><br>CQST/CNEx                                         | CNCA-C23-01              | 2020312310000215                |
|      | <b>EAC</b><br>Brjansker Zertifizierungsstelle                     | TP TC 012/2011           | EAC RU C-DE.AM02.<br>B.00163/19 |
|      | <b>TUEV Nord</b><br>TUEV Nord Cert GmbH                           | IEC 60079-0              | IECEX TUN 09.0001<br>X          |
|      | <b>UL</b><br>Underwriters Laboratories Inc. (HAZARDOUS LOCATIONS) | UL 121201                | E198726 Sec.1                   |

### Country specific Approvals

| Logo | Approval                                    | Additional Approval Text | Certificate name            |
|------|---------------------------------------------|--------------------------|-----------------------------|
|      | <b>KC</b><br>National Radio Research Agency | Article 58-2, Clause 3   | MSIP-<br>REM-W43-<br>END750 |

### Ship Approvals

| Logo | Approval                                  | Additional Approval Text | Certificate name         |
|------|-------------------------------------------|--------------------------|--------------------------|
|      | <b>ABS</b><br>American Bureau of Shipping | -                        | 19-<br>HG1821812-<br>PDA |
|      | <b>DNV GL</b>                             | -                        | TAA00001J4               |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastraße 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

Det Norske Veritas, Germanischer Lloyd

|                                                                                   |                                      |   |                       |
|-----------------------------------------------------------------------------------|--------------------------------------|---|-----------------------|
|  | <b>LR</b><br>Lloyds Register         | - | LR_19_20048           |
|  | <b>PRS</b><br>Polski Rejestr Statków | - | TE/2237<br>/880590/19 |

## UL-Approvals

| Logo                                                                             | Approval                                                            | Additional Approval Text | Certificate name |
|----------------------------------------------------------------------------------|---------------------------------------------------------------------|--------------------------|------------------|
|  | <b>UL</b><br>UL International Netherlands B.V. (ORDINARY LOCATIONS) | UL 508                   | E175199<br>Sec.1 |

## Optional accessories

## System housing

|                                                                                   |                                                                                                                                 |                                                                                |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
|  | <b>Item no.: 850-814/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (200x120x200 mm); without flange plate        | <a href="http://www.wago.com/850-814/002-000">www.wago.com/850-814/002-000</a> |
|  | <b>Item no.: 850-815/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (300x120x200 mm); without flange plate        | <a href="http://www.wago.com/850-815/002-000">www.wago.com/850-815/002-000</a> |
|  | <b>Item no.: 850-816/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (400x120x200 mm); without flange plate        | <a href="http://www.wago.com/850-816/002-000">www.wago.com/850-816/002-000</a> |
|  | <b>Item no.: 850-817/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (600x120x200 mm); without flange plate        | <a href="http://www.wago.com/850-817/002-000">www.wago.com/850-817/002-000</a> |
|  | <b>Item no.: 850-825</b><br>IP65 enclosure; Aluminium (RAL 7032); WxHxD (160x100x160 mm); 9 x M12, 4 x M20                      | <a href="http://www.wago.com/850-825">www.wago.com/850-825</a>                 |
|  | <b>Item no.: 850-826</b><br>IP65 enclosure; Aluminium (RAL 7032); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip | <a href="http://www.wago.com/850-826">www.wago.com/850-826</a>                 |
| <b>Item no.: 850-826/002-000</b>                                                  |                                                                                                                                 |                                                                                |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



|                                                                                   |                                                                                                                          |                                                                                |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
|    | IP65 enclosure; Aluminium (RAL 7035); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip                      | <a href="http://www.wago.com/850-826/002-000">www.wago.com/850-826/002-000</a> |
| <b>Item no.: 850-827</b>                                                          |                                                                                                                          |                                                                                |
|    | IP65 enclosure; Aluminium (RAL 7032); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip                      | <a href="http://www.wago.com/850-827">www.wago.com/850-827</a>                 |
| <b>Item no.: 850-827/002-000</b>                                                  |                                                                                                                          |                                                                                |
|    | IP65 enclosure; Aluminium (RAL 7035); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip                      | <a href="http://www.wago.com/850-827/002-000">www.wago.com/850-827/002-000</a> |
| <b>Item no.: 850-828</b>                                                          |                                                                                                                          |                                                                                |
|    | IP65 enclosure; Aluminium (RAL 7032); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip                     | <a href="http://www.wago.com/850-828">www.wago.com/850-828</a>                 |
| <b>Item no.: 850-828/002-000</b>                                                  |                                                                                                                          |                                                                                |
|    | IP65 enclosure; Aluminium (RAL 7035); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip                     | <a href="http://www.wago.com/850-828/002-000">www.wago.com/850-828/002-000</a> |
| <b>Item no.: 850-834</b>                                                          |                                                                                                                          |                                                                                |
|    | IP65 enclosure; Polyester (RAL 7032); WxHxD (164x100x164 mm); 9 x M12, 4 x M20                                           | <a href="http://www.wago.com/850-834">www.wago.com/850-834</a>                 |
| <b>Item no.: 850-835</b>                                                          |                                                                                                                          |                                                                                |
|    | IP65 enclosure; Polyester (RAL 7032); WxHxD (244x100x164 mm); 4 x M20, 4 x M16, 14 x M12 cable grip                      | <a href="http://www.wago.com/850-835">www.wago.com/850-835</a>                 |
| <b>Item no.: 850-836</b>                                                          |                                                                                                                          |                                                                                |
|   | IP65 enclosure; Polyester (RAL 7032); WxHxD (324x100x164 mm); 4 x M20, 8 x M16, 17 x M12 cable grip                      | <a href="http://www.wago.com/850-836">www.wago.com/850-836</a>                 |
| <b>Carrier rail</b>                                                               |                                                                                                                          |                                                                                |
| <b>Item no.: 210-112</b>                                                          |                                                                                                                          |                                                                                |
|  | Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored | <a href="http://www.wago.com/210-112">www.wago.com/210-112</a>                 |
| <b>Item no.: 210-113</b>                                                          |                                                                                                                          |                                                                                |
|  | Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored                  | <a href="http://www.wago.com/210-113">www.wago.com/210-113</a>                 |
| <b>Item no.: 210-114</b>                                                          |                                                                                                                          |                                                                                |
|  | Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored                   | <a href="http://www.wago.com/210-114">www.wago.com/210-114</a>                 |
| <b>Item no.: 210-115</b>                                                          |                                                                                                                          |                                                                                |
|  | Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored | <a href="http://www.wago.com/210-115">www.wago.com/210-115</a>                 |
| <b>Item no.: 210-118</b>                                                          |                                                                                                                          |                                                                                |
|  | Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored                 | <a href="http://www.wago.com/210-118">www.wago.com/210-118</a>                 |
| <b>Item no.: 210-196</b>                                                          |                                                                                                                          |                                                                                |
|  | Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored               | <a href="http://www.wago.com/210-196">www.wago.com/210-196</a>                 |
| <b>Item no.: 210-197</b>                                                          |                                                                                                                          |                                                                                |
|  | Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored                     | <a href="http://www.wago.com/210-197">www.wago.com/210-197</a>                 |
| <b>Item no.: 210-198</b>                                                          |                                                                                                                          |                                                                                |
|  | Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-                       | <a href="http://www.wago.com/210-198">www.wago.com/210-198</a>                 |

Subject to changes. Please also observe the further product documentation!

colored

|                                                                                 |                                                                                                                                                 |                                                                |
|---------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
|  | <b>Item no.: 210-504</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715; silver-colored   | <a href="http://www.wago.com/210-504">www.wago.com/210-504</a> |
|  | <b>Item no.: 210-505</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715; silver-colored | <a href="http://www.wago.com/210-505">www.wago.com/210-505</a> |
|  | <b>Item no.: 210-506</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715; silver-colored  | <a href="http://www.wago.com/210-506">www.wago.com/210-506</a> |
|  | <b>Item no.: 210-508</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715; silver-colored    | <a href="http://www.wago.com/210-508">www.wago.com/210-508</a> |

## Shield termination

|                                                                                    |                                                                                                               |                                                                |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
|    | <b>Item no.: 790-108</b><br>Shield clamping saddle; 11 mm wide; diameter of compatible conductor; 3 ... 8 mm  | <a href="http://www.wago.com/790-108">www.wago.com/790-108</a> |
|    | <b>Item no.: 790-116</b><br>Shield clamping saddle; 19 mm wide; diameter of compatible conductor; 7 ... 16 mm | <a href="http://www.wago.com/790-116">www.wago.com/790-116</a> |
|    | <b>Item no.: 790-124</b><br>Shield clamping saddle; 27 mm wide; diameter of compatible conductor; 6 ... 24 mm | <a href="http://www.wago.com/790-124">www.wago.com/790-124</a> |
|   | <b>Item no.: 790-140</b><br>Shield clamping saddle; diameter of compatible conductor                          | <a href="http://www.wago.com/790-140">www.wago.com/790-140</a> |
|  | <b>Item no.: 790-208</b><br>Shield clamping saddle; 12.4 mm wide; 3 ... 8 mm                                  | <a href="http://www.wago.com/790-208">www.wago.com/790-208</a> |
|  | <b>Item no.: 790-216</b><br>Shield clamping saddle; 21.8 mm wide; 6 ... 16 mm                                 | <a href="http://www.wago.com/790-216">www.wago.com/790-216</a> |
|  | <b>Item no.: 790-220</b><br>Shield clamping saddle; 30 mm wide; 6 ... 20 mm                                   | <a href="http://www.wago.com/790-220">www.wago.com/790-220</a> |

## Marking accessories

|                                                                                   |                                                                                                                                                   |                                                                                  |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
|  | <b>Item no.: 2009-145</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white          | <a href="http://www.wago.com/2009-145">www.wago.com/2009-145</a>                 |
|  | <b>Item no.: 2009-145/000-002</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow | <a href="http://www.wago.com/2009-145/000-002">www.wago.com/2009-145/000-002</a> |
|  | <b>Item no.: 2009-145/000-005</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red    | <a href="http://www.wago.com/2009-145/000-005">www.wago.com/2009-145/000-005</a> |
|  | <b>Item no.: 2009-145/000-006</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue   | <a href="http://www.wago.com/2009-145/000-006">www.wago.com/2009-145/000-006</a> |

Subject to changes. Please also observe the further product documentation!



|                                                                                   |                                                                                                                                                   |                                                                                  |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
|    | <b>Item no.: 2009-145/000-007</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray   | <a href="http://www.wago.com/2009-145/000-007">www.wago.com/2009-145/000-007</a> |
|    | <b>Item no.: 2009-145/000-012</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange | <a href="http://www.wago.com/2009-145/000-012">www.wago.com/2009-145/000-012</a> |
|    | <b>Item no.: 2009-145/000-023</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green  | <a href="http://www.wago.com/2009-145/000-023">www.wago.com/2009-145/000-023</a> |
|    | <b>Item no.: 2009-145/000-024</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet | <a href="http://www.wago.com/2009-145/000-024">www.wago.com/2009-145/000-024</a> |
|    | <b>Item no.: 248-501</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white                                           | <a href="http://www.wago.com/248-501">www.wago.com/248-501</a>                   |
|    | <b>Item no.: 248-501/000-002</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow                                  | <a href="http://www.wago.com/248-501/000-002">www.wago.com/248-501/000-002</a>   |
|    | <b>Item no.: 248-501/000-005</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red                                     | <a href="http://www.wago.com/248-501/000-005">www.wago.com/248-501/000-005</a>   |
|  | <b>Item no.: 248-501/000-006</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue                                    | <a href="http://www.wago.com/248-501/000-006">www.wago.com/248-501/000-006</a>   |
|  | <b>Item no.: 248-501/000-007</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray                                    | <a href="http://www.wago.com/248-501/000-007">www.wago.com/248-501/000-007</a>   |
|  | <b>Item no.: 248-501/000-012</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange                                  | <a href="http://www.wago.com/248-501/000-012">www.wago.com/248-501/000-012</a>   |
|  | <b>Item no.: 248-501/000-017</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green                             | <a href="http://www.wago.com/248-501/000-017">www.wago.com/248-501/000-017</a>   |
|  | <b>Item no.: 248-501/000-023</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green                                   | <a href="http://www.wago.com/248-501/000-023">www.wago.com/248-501/000-023</a>   |
|  | <b>Item no.: 248-501/000-024</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet                                  | <a href="http://www.wago.com/248-501/000-024">www.wago.com/248-501/000-024</a>   |
|  | <b>Item no.: 750-100</b><br>Marker card; as a DIN A4 sheet; plain                                                                                 | <a href="http://www.wago.com/750-100">www.wago.com/750-100</a>                   |

Subject to changes. Please also observe the further product documentation!



Item no.: 750-103  
Group marker carrier

[www.wago.com/750-103](http://www.wago.com/750-103)

Item no.: 750-106  
Group marker carrier

[www.wago.com/750-106](http://www.wago.com/750-106)

## Downloads Documentation

### Manual

|                                                                                |                         |               |          |
|--------------------------------------------------------------------------------|-------------------------|---------------|----------|
| End module<br>for integration of the internal data bus                         | V 1.3.0                 | pdf<br>1.8 MB | Download |
| System Manual WAGO I/O System 750 / 753<br>Decentralized Automation Technology | V 3.0.2<br>2021. 4. 27. | pdf<br>6.6 MB | Download |
| System Manual Series 750/753<br>Online HTML                                    |                         | URL           | Download |

### Bid Text

|                                 |              |                 |          |
|---------------------------------|--------------|-----------------|----------|
| 750-600/025-000<br>X81 - Datei  | 2019. 2. 19. | xml<br>3.0 kB   | Download |
| 750-600/025-000<br>docx - Datei | 2019. 6. 26. | docx<br>15.9 kB | Download |

### System Description

|                                                                                        |         |                 |          |
|----------------------------------------------------------------------------------------|---------|-----------------|----------|
| Use in Hazardous Environments<br>Term definition, marking and installation regulations | V 1.0.0 | pdf<br>1.0 MB   | Download |
| 750/753 Series I/O-System – General Product Information                                |         | pdf<br>1.7 MB   | Download |
| Overview on WAGO-I/O-SYSTEM 750 approvals                                              |         | pdf<br>780.2 kB | Download |

### Additional Information

|                                                          |         |                 |          |
|----------------------------------------------------------|---------|-----------------|----------|
| Disposal; Electrical and electronic equipment, Packaging | V 1.0.0 | pdf<br>265.8 kB | Download |
|----------------------------------------------------------|---------|-----------------|----------|

## CAD/CAE-Data

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

**CAE data**

|                                   |     |          |
|-----------------------------------|-----|----------|
| EPLAN Data Portal 750-600/025-000 | URL | Download |
| WSCAD Universe 750-600/025-000    | URL | Download |
| ZUKEN Portal 750-600/025-000      | URL | Download |
| EPLAN Data Portal 750-600/025-000 | URL | Download |
| WSCAD Universe 750-600/025-000    | URL | Download |

**CAD data**

|                              |     |          |
|------------------------------|-----|----------|
| 2D/3D Models 750-600/025-000 | URL | Download |
|------------------------------|-----|----------|

**Device Files****Device Driver**

|                                                    |                         |               |          |
|----------------------------------------------------|-------------------------|---------------|----------|
| WAGO USB Service Kabel Treiber / Serie 750 und 857 | 6.5.3.0<br>2014. 9. 10. | zip<br>4.8 MB | Download |
|----------------------------------------------------|-------------------------|---------------|----------|

**Environmental Product Compliance****Compliance Search**

|                                                  |     |          |
|--------------------------------------------------|-----|----------|
| Environmental Product Compliance 750-600/025-000 | URL | Download |
| End Module; Ext. Temperature                     |     |          |

**Installation Notes****Product family**

**750/753 Series I/O System**  
[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.