

STABP01

BASH® DIGITAL PROCESSOR

■ **BASH® LICENCE REQUIRED**



DIP20




SO20

ORDERING NUMBERS:
STABP01 (DIP20)
STABP01D (SO20)

DESCRIPTION

The STABP01 processor is used to control the BASH® Digital Converter. When used in conjunction with BASH® amplifiers a fully integrated high efficiency power amplifier is realized.
By analyzing the audio input, the Processor determines the appropriate on/off events and generates a digital pulse for the Digital Converter. The converter turns this pulse into a power signal that feeds the power amplifier. The feedback system allows the processor to constantly adapt to the audio signal and regenerate the digital pulse thereby maintaining a constant voltage across the output devices.

BLOCK DIAGRAM

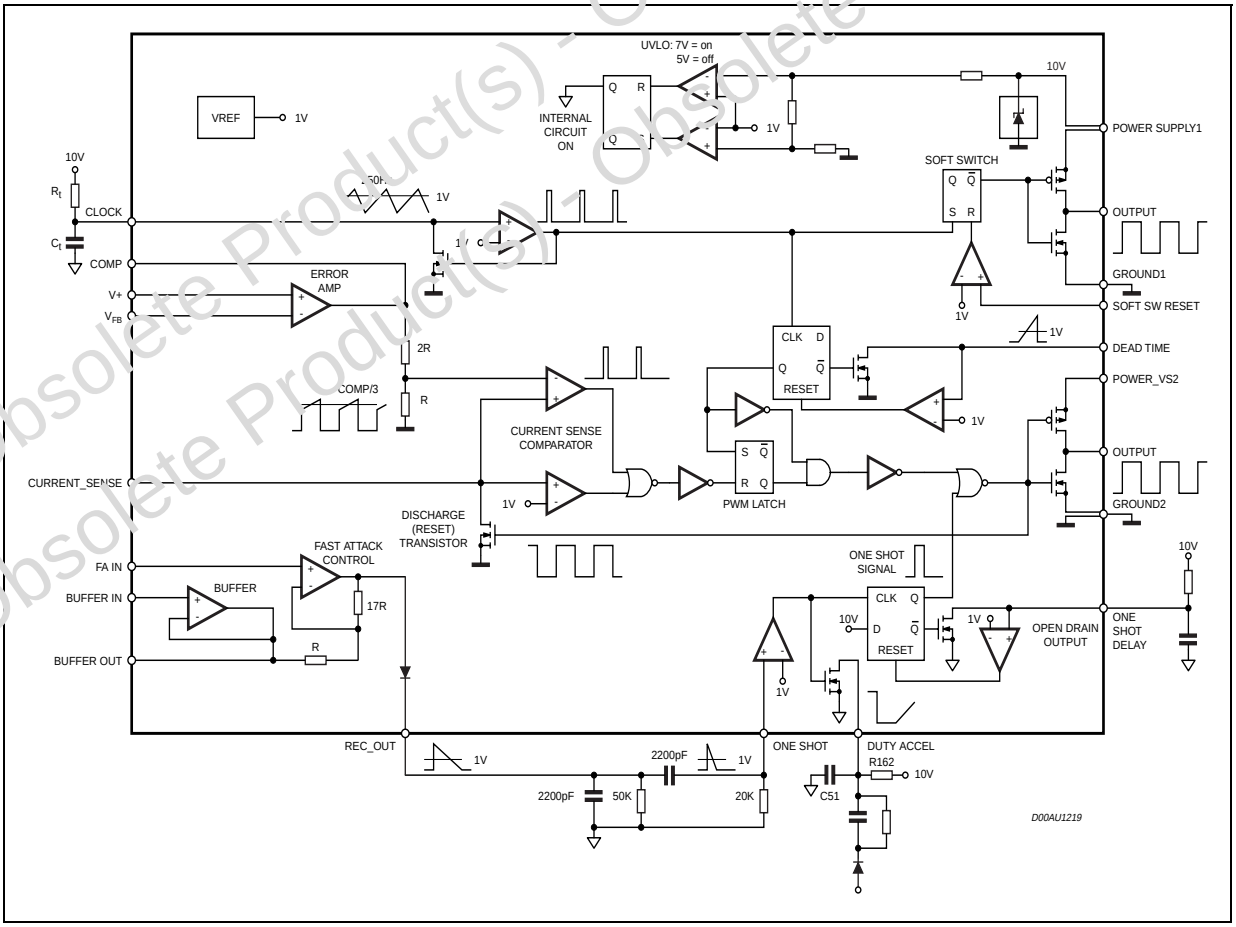

Obsolete Product(s) - Obsolete Product(s)


ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
Vs	Supply Voltage	10.5	V
Io	Output Current	±0.6	A
Eo	Output Energy(capacitive load)	5	µJ
Vi	Analog Input Voltage	-0.3 to 8	V
Io	Error Amplifier Output Sink Current	10	mA
P_{tot}	Power Dissipation at Tamb	500	mW
T_{stg}	Storage Ambient Temperature	-65 to 150	°C
T_L	Lead Temperature (soldering 10s)	300	°C
T_{op}	Operating Temperature Range	-25 to 85	°C


THERMAL DATA

Symbol	Parameter	SO20	DIP20	Unit
$R_{th\ j\text{-}amb}$	Thermal Resistance junction-ambient soldered on PCB	95	90	°C/W

PIN CONNECTION

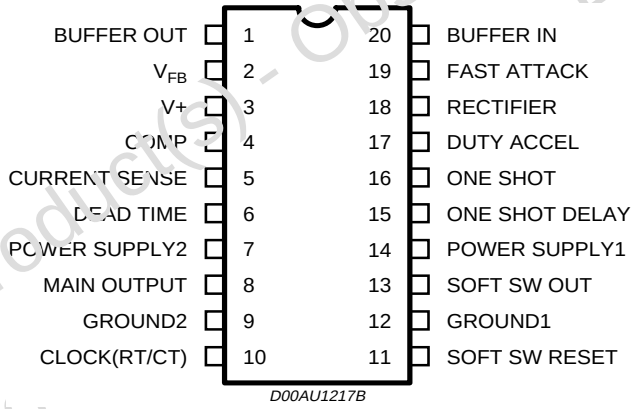

TYPICAL APPLICATION CIRCUIT

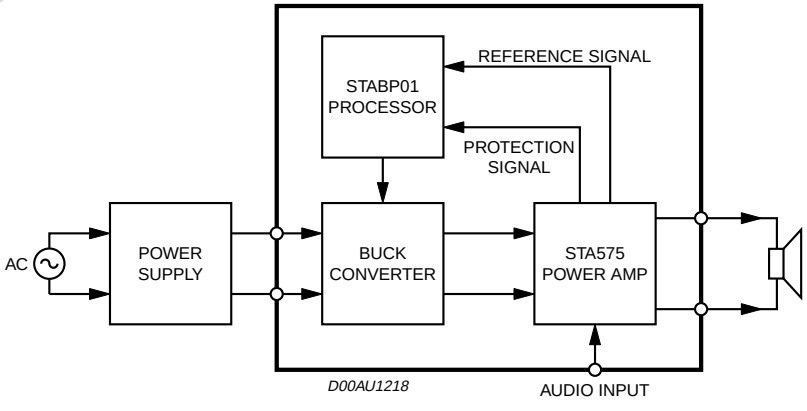

Obsolete Product(s) - Obsolete Product(s)

ELECTRICAL CHARACTERISTCS (Vs = 10V; Rt = 22kΩ; Ct = 2.2nF; t = 25°C unless otherwise specified)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
OSCILLATOR SECTION						
fs	Initial Accuracy (*)	Tj=25C, SW Out Off	225	250	300	kHz
Ts	Temperature Stability	Tmin<Tamb<Tmax		5		%
	Amplitude	Vpin10 Peak to Peak		0.5		V
ERROR AMP SECTION						
Ib	Input Bias Current				1	µA
A_{VOL}	Open loop Gain		65	90		dB
B	Unity Gain Bandwidth		0.7	1		MHz
SVR	Supply Voltage Rejection	6<Vs<10V	60	70		dB
I_{CMR}	Input Common Mode Range		0		8	V
C_{MRR}	Common Mode Rejection Ratio			90		dB
O_R	Output Voltage Range	I = 1mA	0.5		8.5	V
CURRENT SENSE SECTION						
Gv	Gain	V4/V5, V5 <1V, Duty Cycle = 80%	2.7	3	3.3	V/V
V5	Maximum Input Signal	V4 = 5V	0.9	1	1.1	V
Ib	Input Bias Current	V5 <0.9V,			1	µA
Odt	Delay to Output (minimum output pulse)			150	300	ns
OUTPUT SECTION						
V_{OL}	Output Low Level	Isink=20mA Isink=200mA		0.1 1.5	0.4 2.2	V V
V_{OH}	Output High Level	Isource=20mA Isource=200mA	9.6 7.8	9.9 8.5		V V
tr	Rise Time	Tj=25°C CL=1nF		50	150	ns
tf	Fall Time	Tj=25°C CL=1nF		50	150	ns
UNDER-VOLTAGE LOCKOUT SECTION						
UVstart	Start Threshold		6.3	7	7.7	V
UVstop	Min Operating Voltage After Turn-on		4.5	5	5.5	V
TOTAL STANDBY CURRENT						
Ist	Start-up Current			0.5	1	mA
Is	Operating Supply Current			10	20	mA

Obsolete Product(s) - Obsolete Product(s)
Obsolete Product(s) - Obsolete Product(s)

ELECTRICAL CHARACTERISTCS (continued)


Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
BUFFER SECTION						
Ib	Input Bias Current				1	µA
B	Unity Gain Bandwidth		0.7	1		MHz
SVR	Supply Voltage Rejection	6<Vs<10V	60	70		dB
I_{CMR}	Input Common Mode Range		0		9	V
O_R	Output Range	I = 1mA	0.5		8.5	V
SOFT SWITCH SECTION						
V_{OL}	Output Low Level	Isink=20mA Isink=200mA		0.1 1.5	0.4 2.2	V V
V_{OH}	Output High Level	Isource=20mA Isource=200mA	9.6 7.8	9.9 8.5		V V
tr	Rise Time	Tj=25°C CL=1nF		50	150	ns
tf	Fall Time	Tj=25°C CL=1nF		50	150	ns
V_{reset}	Reset Level			1		V
FAST ATTACK CONTROL SECTION						
G_{diff}	Differential Gain		16	18	20	V/V
OS_{th}	Level for one shot		0.9	1	1.1	V
OSD_{th}	Level for one shot delay		0.9	1	1.1	V
$I15_{leak}$	Leakage pin 15	V15 = 0.8V			0.2	µA
$I17_{leak}$	Leakage pin 17	V17 = 10V, V16 = 0V			0.2	µA

(*) Rt, Ct = 1% precision component


Obsolete Product(s) - Obsolete Product(s)
Obsolete Product(s) - Obsolete Product(s)

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
a1	0.254			0.010		
B	1.39		1.65	0.055		0.065
b		0.45			0.018	
b1		0.25			0.010	
D			25.4			1.000
E		8.5			0.335	
e		2.54			0.100	
e3		22.86			0.900	
F			7.1			0.280
I			3.93			0.155
L		3.3			0.130	
Z			1.34			0.053

OUTLINE AND MECHANICAL DATA




DIP20

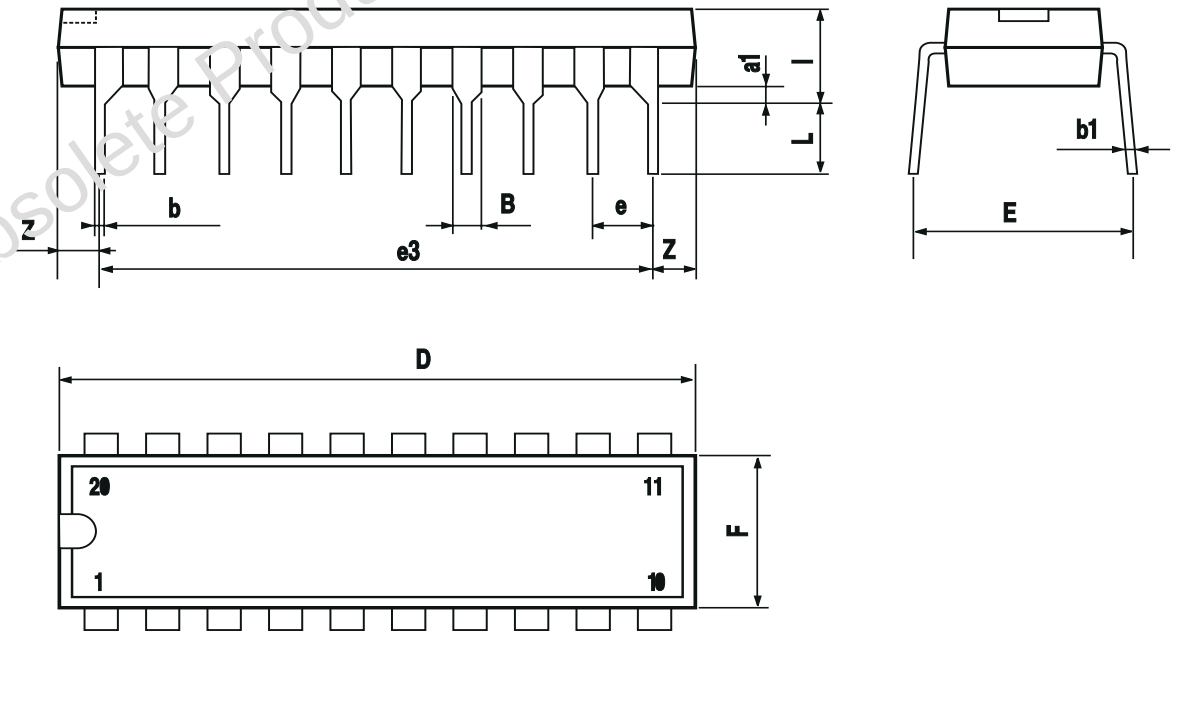


Obsolete Product(s) - Obsolete Product(s)

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	2.35		2.65	0.093		0.104
A1	0.1		0.3	0.004		0.012
B	0.33		0.51	0.013		0.020
C	0.23		0.32	0.009		0.013
D	12.6		13	0.496		0.512
E	7.4		7.6	0.291		0.299
e		1.27			0.050	
H	10		10.65	0.394		0.419
h	0.25		0.75	0.010		0.030
L	0.4		1.27	0.016		0.050
K	0˚ (min.)8˚ (max.)					

OUTLINE AND MECHANICAL DATA

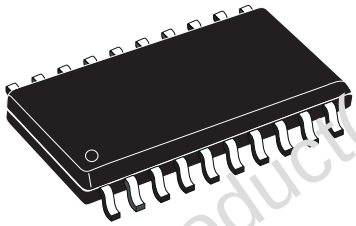

SO20

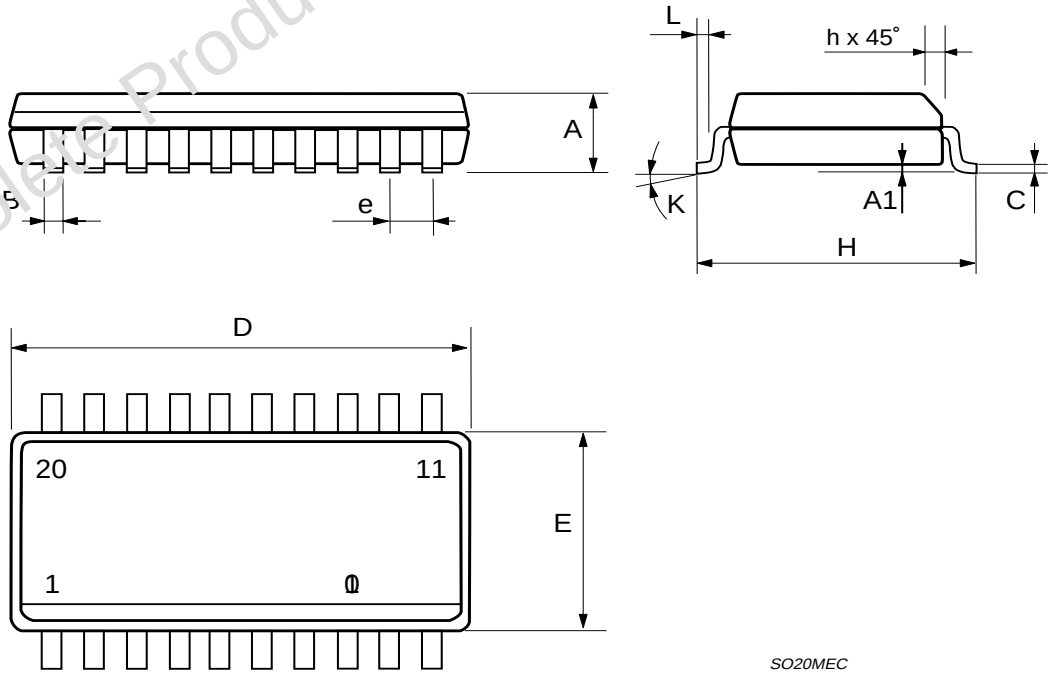

Obsolete Product(s) - Obsolete Product(s)

Obsolete Product(s) - Obsolete Product(s)
Obsolete Product(s) - Obsolete Product(s)

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics
® 2000 STMicroelectronics - All Rights Reserved

STMicroelectronics GROUP OF COMPANIES
Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States
http://www.st.com