DS90CF563/DS90CF564 LVDS 18-Bit Color Flat Panel Display (FPD) Link - 65 MHz

Check for Samples: DS90CF563, DS90CF564

FEATURES

- **20 to 65 MHz Shift Clk Support**
- **Up to 171 Mbytes/s Bandwidth**
- **Cable Size is Reduced to Save Cost**
- **290 mV Swing LVDS Devices for Low EMI**
- **Low Power CMOS Design (< 550 mW typ)**
- **Power-down Mode Saves Power (< 0.25 mW)**
- **PLL Requires No External Components**
- **Low Profile 48-Lead TSSOP Package**
- **Falling Edge Data Strobe**
- **Compatible with TIA/EIA-644 LVDS Standard**
- **Single Pixel Per Clock XGA (1024 x 768)**
- **Supports VGA, SVGA, XGA and Higher**
- **1.3 Gbps Throughput**

DESCRIPTION

The DS90CF563 transmitter converts 21 bits of CMOS/TTL data into three LVDS (Low Voltage Differential Signaling) data streams. A phase-locked transmit clock is transmitted in parallel with the data streams over a fourth LVDS link. Every cycle of the transmit clock 21 bits of input data are sampled and transmitted. The DS90CF564 receiver converts the LVDS data streams back into 21 bits of CMOS/TTL data. At a transmit clock frequency of 65 MHz, 18 bits of RGB data and 3 bits of LCD timing and control data (FPLINE, FPFRAME, DRDY) are transmitted at a rate of 455 Mbps per LVDS data channel. Using a 65 MHz clock, the data throughput is 171 Mbytes per second. These devices are offered with falling edge data strobes for convenient interface with a variety of graphics and LCD panel controllers.

This chipset is an ideal means to solve EMI and cable size problems associated with wide, high speed TTL interfaces.

Block Diagram

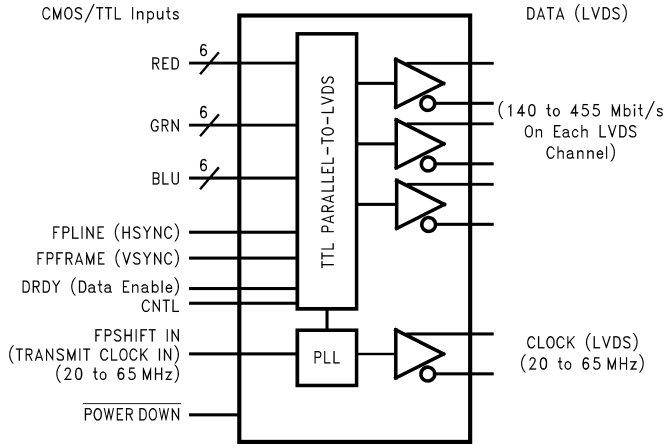


Figure 1. DS90CF563
DS90CF563MTD is no longer available.

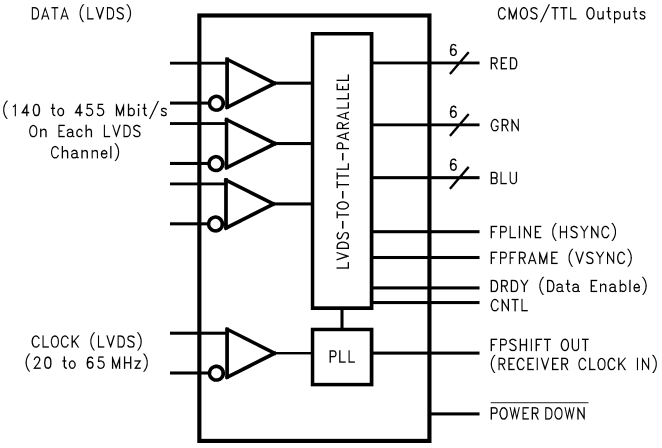


Figure 2. DS90CF564
See Package Number DGG0048A


Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 1997–2013, Texas Instruments Incorporated

Application

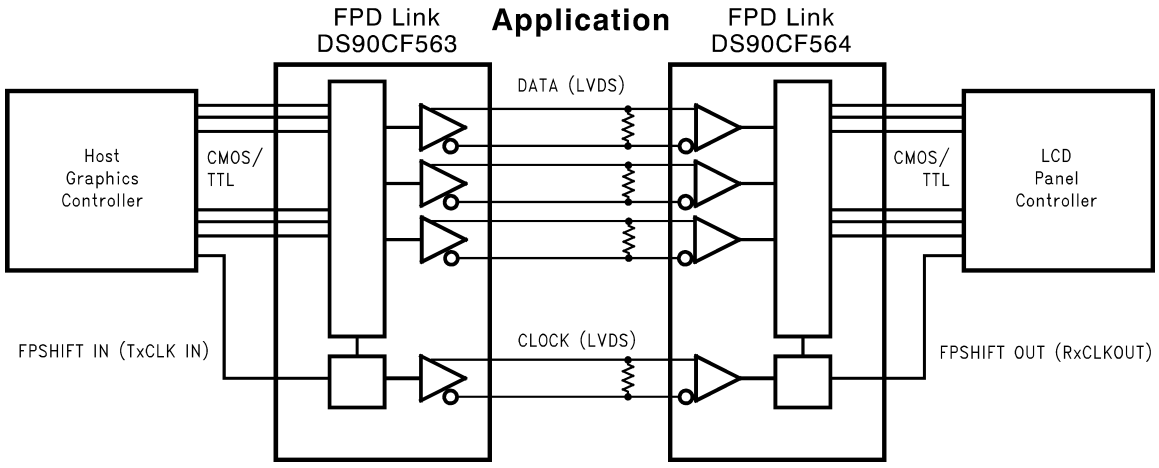

Absolute Maximum Ratings[1][2]

Supply Voltage (V_{CC})			−0.3V to +6V
CMOS/TTL Input Voltage			−0.3V to (V_{CC} + 0.3V)
CMOS/TTL Output Voltage			−0.3V to (V_{CC} + 0.3V)
LVDS Receiver Input Voltage			−0.3V to (V_{CC} + 0.3V)
LVDS Driver Output Voltage			−0.3V to (V_{CC} + 0.3V)
LVDS Output Short Circuit Duration			Continuous
Junction Temperature			+150°C
Storage Temperature			−65°C to +150°C
Lead Temperature (Soldering, 4 sec)			+260°C
Maximum Package Power Dissipation @ +25°C	DGG0048A (TSSOP) Package:	DS90CF563	1.98W
		DS90CF564	1.89W
	Package Derating:	DS90CF563	16 mW/°C above +25°C
		DS90CF564	15 mW/°C above +25°C
This device does not meet 2000V ESD rating [3] .			

(1) If Military/Aerospace specified devices are required, please contact the TI Sales Office/ Distributors for availability and specifications.
(2) "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be verified. They are not meant to imply that the device should be operated at these limits. The "Electrical Characteristics" specify conditions for device operation.
(3) ESD Rating: HBM (1.5 kΩ, 100 pF) PLL V_{CC} ≥ 1000V All other pins ≥ 2000V EIAJ (0Ω, 200 pF) ≥ 150V

Recommended Operating Conditions

	Min	Nom	Max	Units
Supply Voltage (V_{CC})	4.75	5.0	5.25	V
Operating Free Air Temperature (T_A)	−10	+25	+70	°C
Receiver Input Range	0		2.4	V
Supply Noise Voltage (V_{CC})			100	mV_{P-P}

Electrical Characteristics

Over recommended operating supply and temperature ranges unless otherwise specified

Symbol	Parameter	Conditions		Min	Typ	Max	Units
CMOS/TTL DC SPECIFICATIONS							
V_{IH}	High Level Input Voltage			2.0		V_{CC}	V
V_{IL}	Low Level Input Voltage			GND		0.8	V
V_{OH}	High Level Output Voltage	I_{OH} = −0.4 mA		3.8	4.9		V
V_{OL}	Low Level Output Voltage	I_{OL} = 2 mA			0.1	0.3	V

Copyright © 1997–2013, Texas Instruments Incorporated

Electrical Characteristics (continued)

Over recommended operating supply and temperature ranges unless otherwise specified

Symbol	Parameter	Conditions		Min	Typ	Max	Units
V_{CL}	Input Clamp Voltage	I_{CL} = −18 mA			−0.79	−1.5	V
I_{IN}	Input Current	V_{IN} = V_{CC}, GND, 2.5V or 0.4V			±5.1	±10	µA
I_{OS}	Output Short Circuit Current	V_{OUT} = 0V				−120	mA
LVDS DRIVER DC SPECIFICATIONS							
V_{OD}	Differential Output Voltage	R_L = 100Ω		250	290	450	mV
ΔV_{OD}	Change in V_{OD} between Complementary Output States					35	mV
V_{CM}	Common Mode Voltage			1.1	1.25	1.375	V
ΔV_{CM}	Change in V_{CM} between Complementary Output States					35	mV
V_{OH}	High Level Output Voltage				1.3	1.6	V
V_{OL}	Low Level Output Voltage			0.9	1.01		V
I_{OS}	Output Short Circuit Current	V_{OUT} = 0V, R_L = 100Ω			−2.9	−5	mA
I_{OZ}	Output TRI-STATE Current	$\overline{\text{Power Down}}$ = 0V, V_{OUT} = 0V or V_{CC}			±1	±10	µA
LVDS RECEIVER DC SPECIFICATIONS							
V_{TH}	Differential Input High Threshold	V_{CM} = +1.2V				+100	mV
V_{TL}	Differential Input Low Threshold			−100			mV
I_{IN}	Input Current	V_{IN} = +2.4V	V_{CC} = 5.5V			±10	µA
		V_{IN} = 0V				±10	µA
TRANSMITTER SUPPLY CURRENT							
I_{CCTW}	Transmitter Supply Current, Worst Case	R_L = 100Ω, C_L = 5 pF, Worst Case Pattern (Figure 3, Figure 5)	f = 32.5 MHz		49	63	mA
			f = 37.5 MHz		51	64	mA
			f = 65 MHz		70	84	mA
I_{CCTG}	Transmitter Supply Current, 16 Grayscale	R_L = 100Ω, C_L = 5 pF, 16 Grayscale Pattern (Figure 4, Figure 5)	f = 32.5 MHz		40	55	mA
			f = 37.5 MHz		41	55	mA
			f = 65 MHz		55	67	mA
I_{CCTZ}	Transmitter Supply Current, Power Down	$\overline{\text{Power Down}}$ = Low			1	25	µA
RECEIVER SUPPLY CURRENT							
I_{CCRW}	Receiver Supply Current,	C_L = 8 pF,	f = 32.5 MHz		64	77	mA
	Worst Case	Worst Case Pattern	f = 37.5 MHz		70	85	mA
		(Figure 3, Figure 6)	f = 65 MHz		110	140	mA
I_{CCRG}	Receiver Supply Current,	C_L = 8 pF,	f = 32.5 MHz		35	55	mA
	16 Grayscale	16 Grayscale Pattern	f = 37.5 MHz		37	55	mA
		(Figure 4, Figure 6)	f = 65 MHz		55	67	mA
I_{CCRZ}	Receiver Supply Current,	$\overline{\text{Power Down}}$ = Low			1	10	µA
	Power Down						

Transmitter Switching Characteristics

Over recommended operating supply and temperature ranges unless otherwise specified

Symbol	Parameter	Min	Typ	Max	Units
LLHT	LVDS Low-to-High Transition Time (Figure 5)		0.75	1.5	ns
LHLT	LVDS High-to-Low Transition Time (Figure 5)		0.75	1.5	ns
TCIT	TxCLK IN Transition Time (Figure 7)			8	ns
TCCS	TxOUT Channel-to-Channel Skew (1) (Figure 8)			350	ps

(1) This limit based on bench characterization.

Copyright © 1997–2013, Texas Instruments Incorporated

Transmitter Switching Characteristics (continued)

Over recommended operating supply and temperature ranges unless otherwise specified

Symbol	Parameter		Min	Typ	Max	Units
TCCD	TxCLK IN to TxCLK OUT Delay @ 25°C, V_{CC} = 5.0V		3.5		8.5	ns
	(Figure 11)					
TCIP	TxCLK IN Period (Figure 9)		15	T	50	ns
TCIH	TxCLK IN High Time (Figure 9)		0.35T	0.5T	0.65T	ns
TCIL	TxCLK IN Low Time (Figure 9)		0.35T	0.5T	0.65T	ns
TSTC	TxIN Setup to TxCLK IN (Figure 9)	f = 65 MHz	5	3.5		ns
THTC	TxIN Hold to TxCLK IN (Figure 9)		2.5	1.5		ns
TPDD	Transmitter Powerdown Delay (Figure 20)				100	ns
TPLLS	Transmitter Phase Lock Loop Set (Figure 13)				10	ms
TPPos0	Transmitter Output Pulse Position 0 (Figure 15)		−0.30	0	0.30	ns
TPPos1	Transmitter Output Pulse Position 1		1.70	1/7 T_{clk}	2.50	ns
TPPos2	Transmitter Output Pulse Position 2		3.60	2/7 T_{clk}	4.50	ns
TPPos3	Transmitter Output Pulse Position 3		5.90	3/7 T_{clk}	6.75	ns
TPPos4	Transmitter Output Pulse Position 4		8.30	4/7 T_{clk}	9.00	ns
TPPos5	Transmitter Output Pulse Position 5		10.40	5/7 T_{clk}	11.10	ns
TPPos6	Transmitter Output Pulse Position 6		12.70	6/7 T_{clk}	13.40	ns

Receiver Switching Characteristics

Over recommended operating supply and temperature ranges unless otherwise specified.

Symbol	Parameter		Min	Typ	Max	Units
CLHT	CMOS/TTL Low-to-High Transition Time (Figure 6)			2.5	4.0	ns
CHLT	CMOS/TTL High-to-Low Transition Time (Figure 6)			2.0	3.5	ns
RCOP	RxCLK OUT Period		15	T	50	ns
RCOH	RxCLK OUT High Time	f = 65 MHz	7.8	9		ns
RCOL	RxCLK OUT Low Time	f = 65 MHz	3.8	5		ns
RSRC	RxOUT Setup to RxCLK OUT	f = 65 MHz	2.5	4.2		ns
RHRC	RxOUT Hold to RxCLK OUT	f = 65 MHz	4.0	5.2		ns
RCCD	RxCLK IN to RxCLK OUT Delay @ 25°C, V_{CC} = 5.0V		6.4		10.7	ns
	(Figure 12)					
RPLLS	Receiver Phase Lock Loop Set (Figure 14)				10	ms
RSKM	RxIN Skew Margin (1) (Figure 16)	V_{CC} = 5V, T_A =25°C	600			ps
RPDD	Receiver Powerdown (Figure 19)				1	µs

(1) Receiver Skew Margin is defined as the valid data sampling region at the receiver inputs. This margin takes into account transmitter output skew (TCCS) and the setup and hold time (internal data sampling window), allowing for LVDS cable skew dependent on type/length and source clock (TxCLK IN) jitter.

RSKM ≥ cable skew (the, length) + source clock jitter (cycle to cycle)

Copyright © 1997–2013, Texas Instruments Incorporated

AC Timing Diagrams


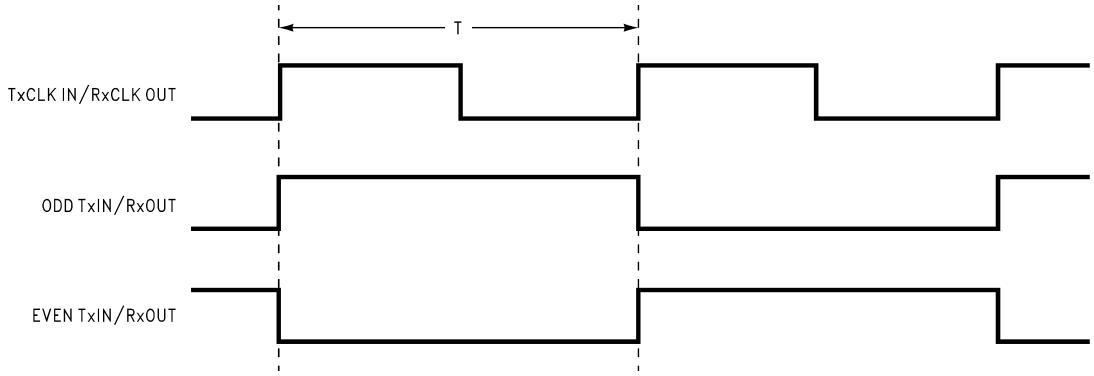


Figure 3. "Worst Case" Test Pattern

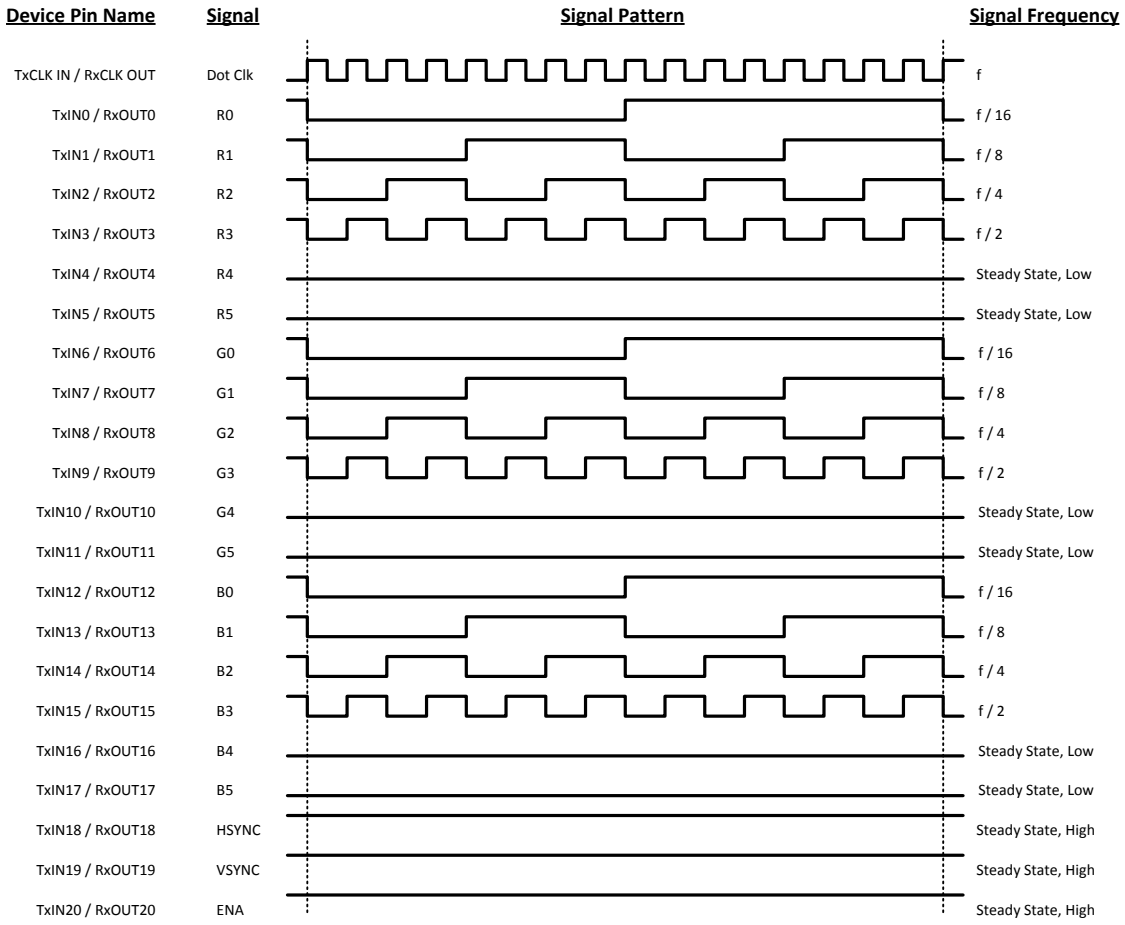

(1) The worst case test pattern produces a maximum toggling of digital circuits, LVDS I/O and CMOS/TTL I/O.

(2) The 16 grayscale test pattern tests device power consumption for a "typical" LCD display pattern. The test pattern approximates signal switching needed to produce groups of 16 vertical stripes across the display.

(3) Figure 3 and Figure 4 show a falling edge data strobe (TxCLK IN/RxCLK OUT).

(4) Recommended pin to signal mapping. Customer may choose to define differently.

Figure 4. "16 Grayscale" Test Pattern

Copyright © 1997–2013, Texas Instruments Incorporated

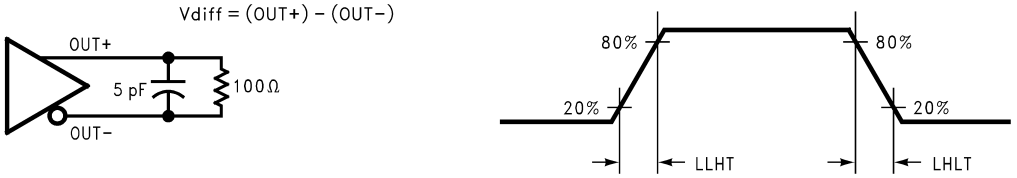


Figure 5. DS90CF563 (Transmitter) LVDS Output Load and Transition Times

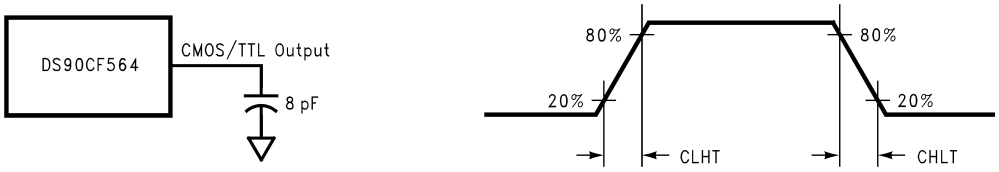


Figure 6. DS90CF564 (Receiver) CMOS/TTL Output Load and Transition Times


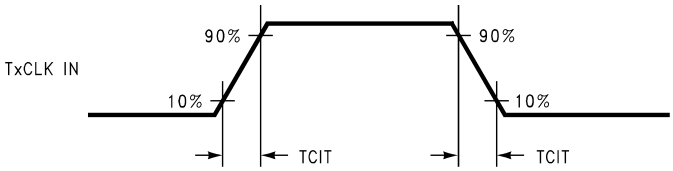


Figure 7. DS90CF563 (Transmitter) Input Clock Transition Time

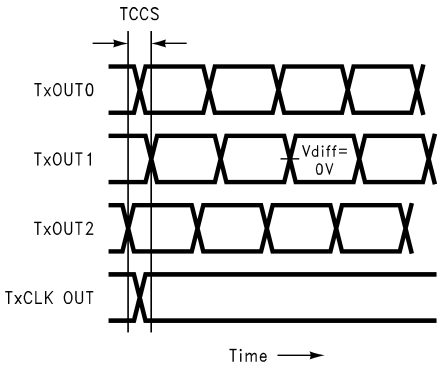

Note: Measurements at Vdiff = 0V
Note: TCSS measured between earliest and latest LVDS edges.
Note: TxCLK Differential High→Low Edge

Figure 8. DS90CF563 (Transmitter) Channel-to-Channel Skew and Pulse Width

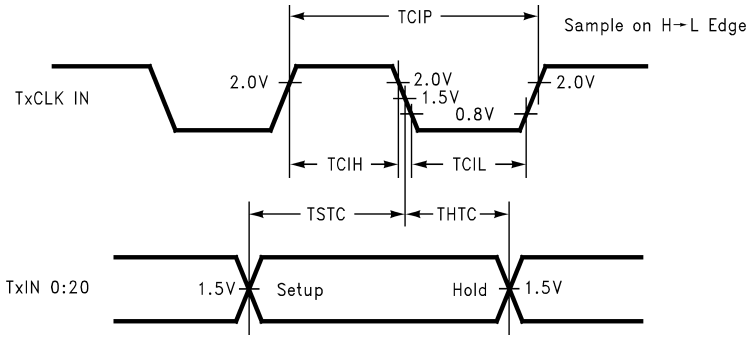


Figure 9. DS90CF563 (Transmitter) Setup/Hold and High/Low Times

Copyright © 1997–2013, Texas Instruments Incorporated

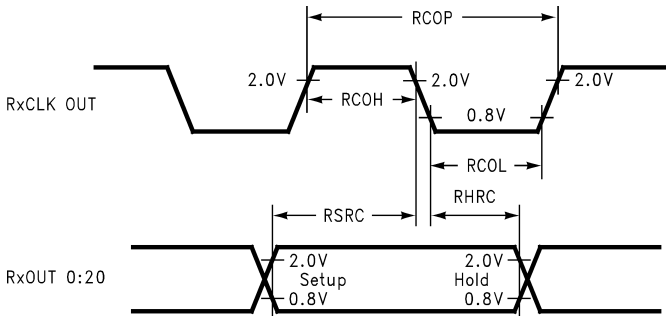


Figure 10. DS90CF564 (Receiver) Clock In to Clock Out Delay

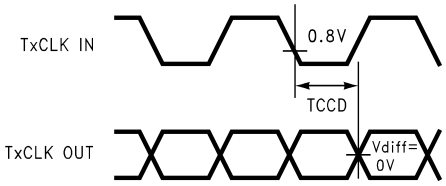


Figure 11. DS90CF563 (Transmitter) Clock In to Clock Out Delay




Figure 12. DS90CF564 (Receiver) Clock In to Clock Out Delay

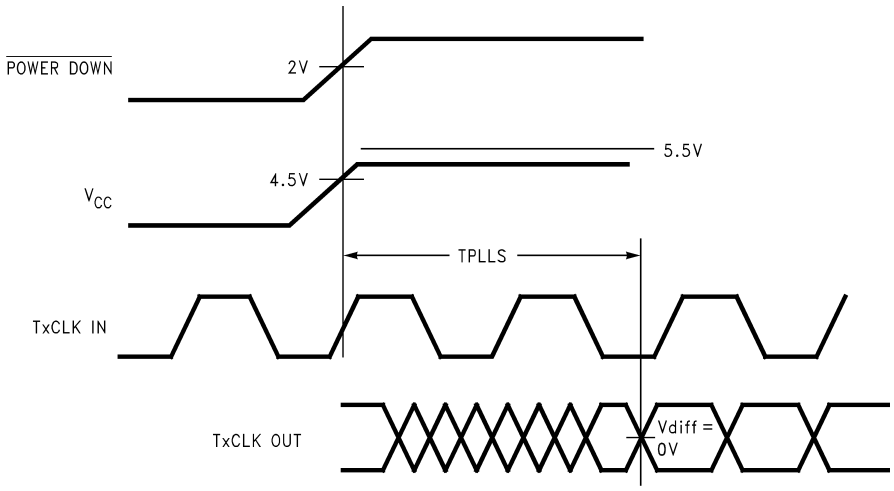


Figure 13. DS90CF563 (Transmitter) Phase Lock Loop Set Time

Copyright © 1997–2013, Texas Instruments Incorporated

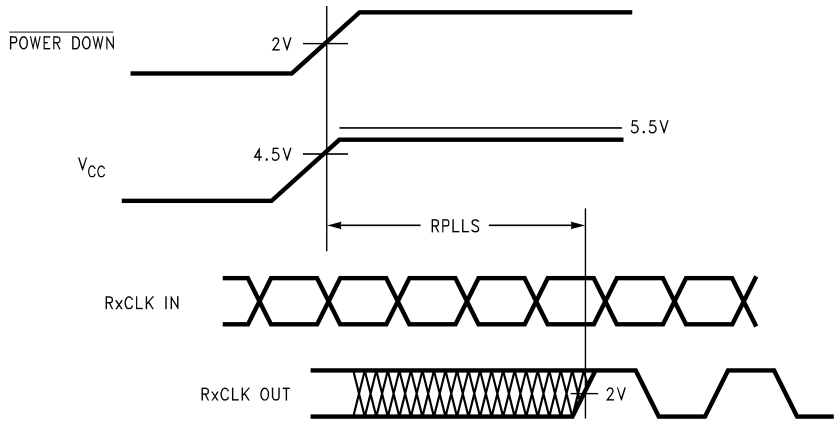


Figure 14. DS90CF564 (Receiver) Phase Lock Loop Set Time


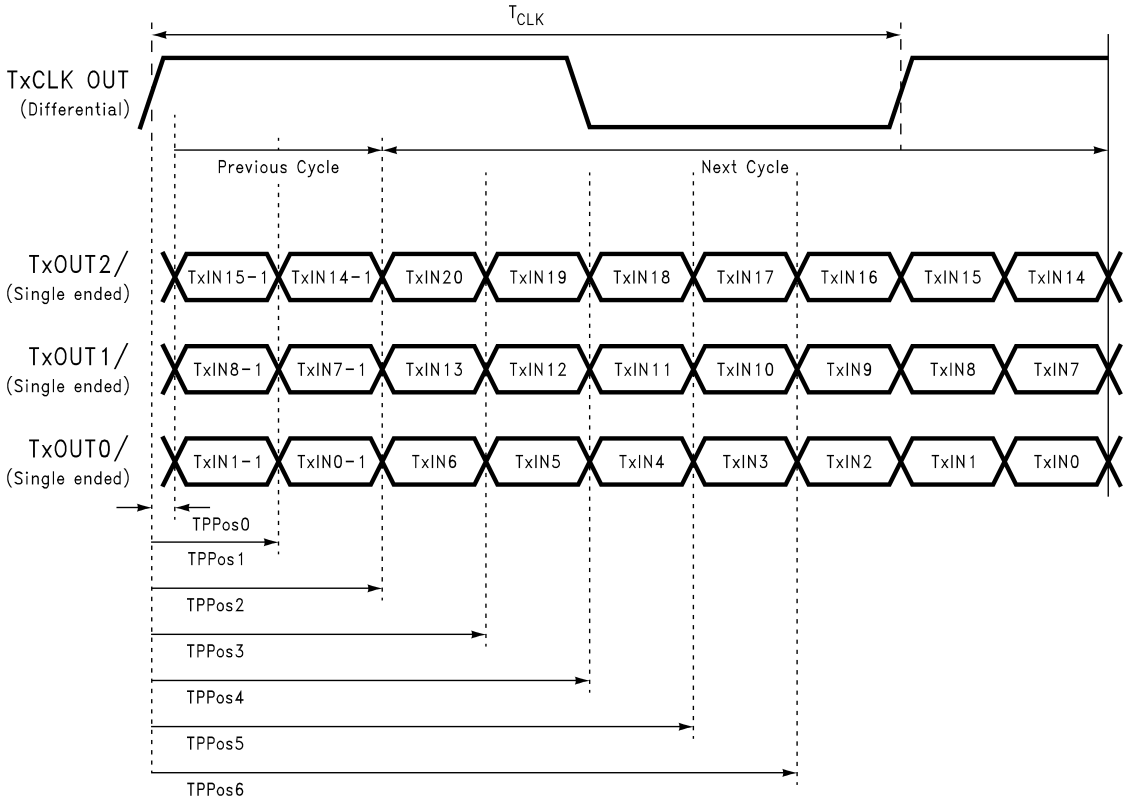


Figure 15. Transmitter LVDS Output Pulse Position Measurement

Copyright © 1997–2013, Texas Instruments Incorporated

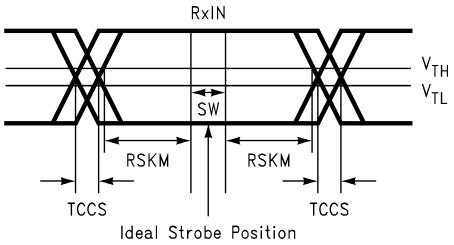

SW—Setup and Hold Time (Internal Data Sampling Window)
TCCS—Transmitter Output Skew
RSKM ≥ Cable Skew (type, length) + Source Clock Jitter (cycle to cycle)
Cable Skew—typically 10 ps–40 ps per foot

Figure 16. Receiver LVDS Input Skew Margin

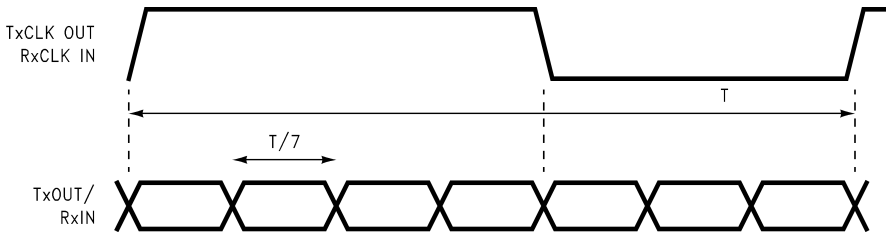


Figure 17. Seven Bits of LVDS in One Clock Cycle

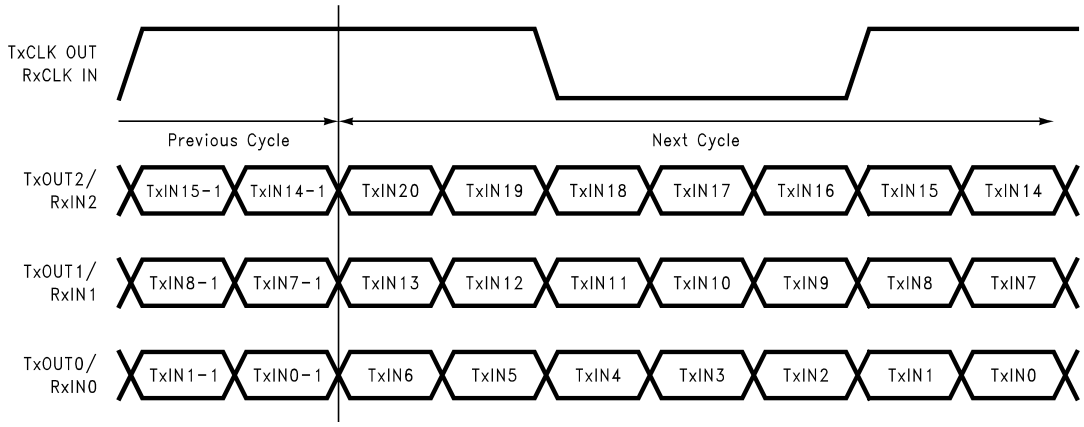


Figure 18. 21 Parallel TTL Data Inputs Mapped to LVDS Outputs (DS90CF563)

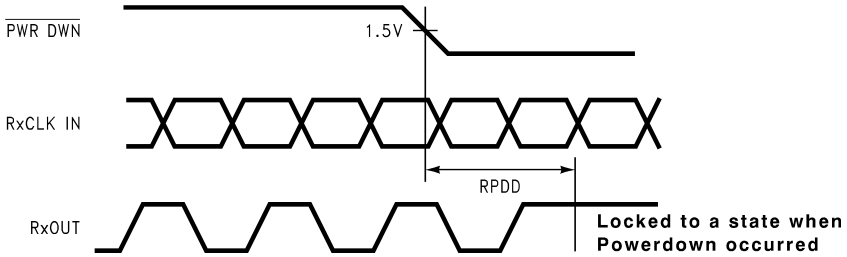


Figure 19. Receiver Powerdown Delay

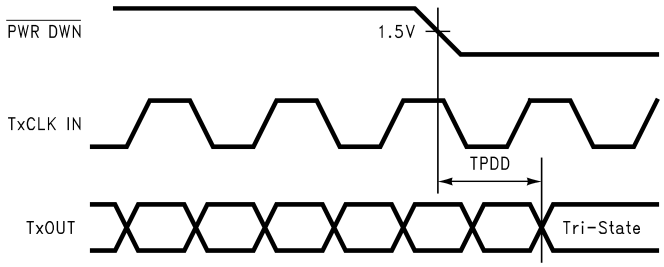


Figure 20. Transmitter Powerdown Delay

DS90CF563 Pin Descriptions—FPD Link Transmitter

Pin Name	I/O	No.	Description
TxIN	I	21	TTL level input. This includes: 6 Red, 6 Green, 6 Blue, and 3 control lines—FPLINE, FPFRAME, DRDY (also referred to as HSYNC, VSYNC, Data Enable)
TxOUT+	O	3	Positive LVDS differential data output
TxOUT−	O	3	Negative LVDS differential data output
FPSHIFT IN	I	1	TTL level clock input. The falling edge acts as data strobe
TxCLK OUT+	O	1	Positive LVDS differential clock output
TxCLK OUT−	O	1	Negative LVDS differential clock output
$\overline{\text{PWR DOWN}}$	I	1	TTL level input. Assertion (low input) TRI-STATES the outputs, ensuring low current at power down
V_{CC}	I	4	Power supply pins for TTL inputs
GND	I	5	Ground pins for TTL inputs
PLL V_{CC}	I	1	Power supply pin for PLL
PLL GND	I	2	Ground pins for PLL
LVDS V_{CC}	I	1	Power supply pin for LVDS outputs
LVDS GND	I	3	Ground pins for LVDS outputs


DS90CF564 Pin Descriptions—FPD Link Receiver

Pin Name	I/O	No.	Description
RxIN+	I	3	Positive LVDS differential data inputs
RxIN−	I	3	Negative LVDS differential data inputs
RxOUT	O	21	TTL level data outputs. This includes: 6 Red, 6 Green, 6 Blue, and 3 control lines—FPLINE, FPFRAME, DRDY(also referred to as HSYNC, VSYNC, Data Enable)
RxCLK IN+	I	1	Positive LVDS differential clock input
RxCLK IN−	I	1	Negative LVDS differential clock input
FPSHIFT OUT	O	1	TTL level clock output. The falling edge acts as data strobe
$\overline{\text{PWR DOWN}}$	I	1	TTL level input. Assertion (low input) maintains the receiver outputs in the previous state
V_{CC}	I	4	Power supply pins for TTL outputs
GND	I	5	Ground pins for TTL outputs
PLL V_{CC}	I	1	Power supply for PLL
PLL GND	I	2	Ground pin for PLL
LVDS V_{CC}	I	1	Power supply pin for LVDS inputs
LVDS GND	I	3	Ground pins for LVDS inputs


Copyright © 1997–2013, Texas Instruments Incorporated

Connection Diagram

DS90CF563

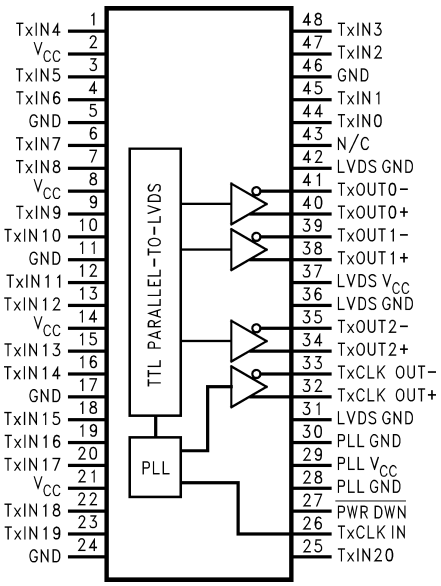

DS90CF564

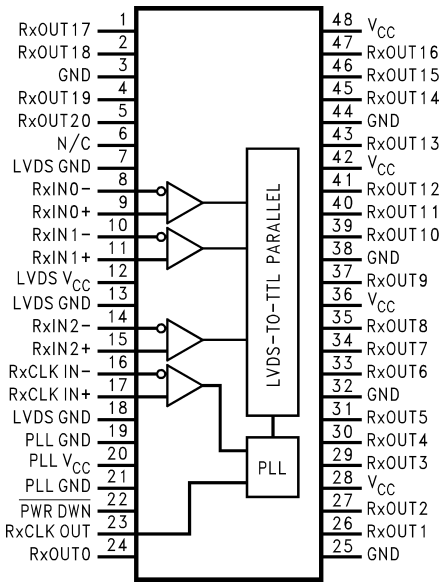

REVISION HISTORY

Changes from Revision D (April 2013) to Revision E	Page
• Changed layout of National Data Sheet to TI format	11

Copyright © 1997–2013, Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
DS90CF564MTD/NOPB	ACTIVE	TSSOP	DGG	48	38	Green (RoHS & no Sb/Br)	SN	Level-2-260C-1 YEAR	-10 to 70	DS90CF564MTD >B	Samples
DS90CF564MTDX/NOPB	ACTIVE	TSSOP	DGG	48	1000	Green (RoHS & no Sb/Br)	SN	Level-2-260C-1 YEAR	-10 to 70	DS90CF564MTD >B	Samples

(1) The marketing status values are defined as follows:
ACTIVE: Product device recommended for new designs.
LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
PREVIEW: Device has been announced but is not in production. Samples may or may not be available.
OBSOLETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".
RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.
Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.


(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

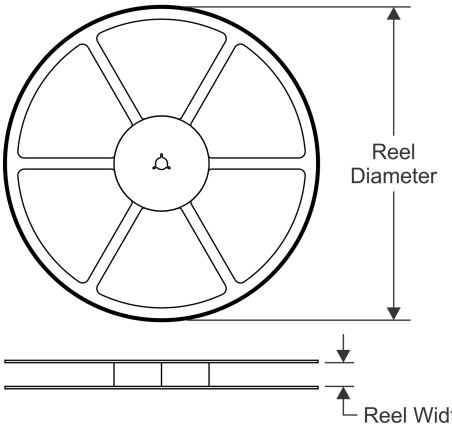


TAPE DIMENSIONS

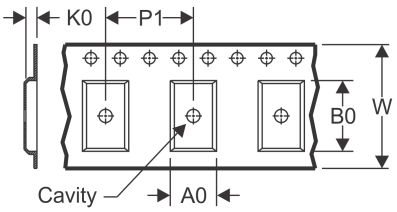

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

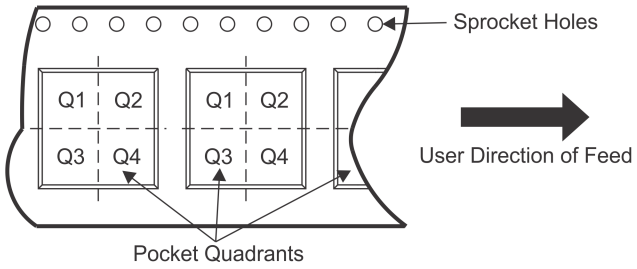

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
DS90CF564MTDX/NOPB	TSSOP	DGG	48	1000	330.0	24.4	8.6	13.2	1.6	12.0	24.0	Q1

TAPE AND REEL BOX DIMENSIONS

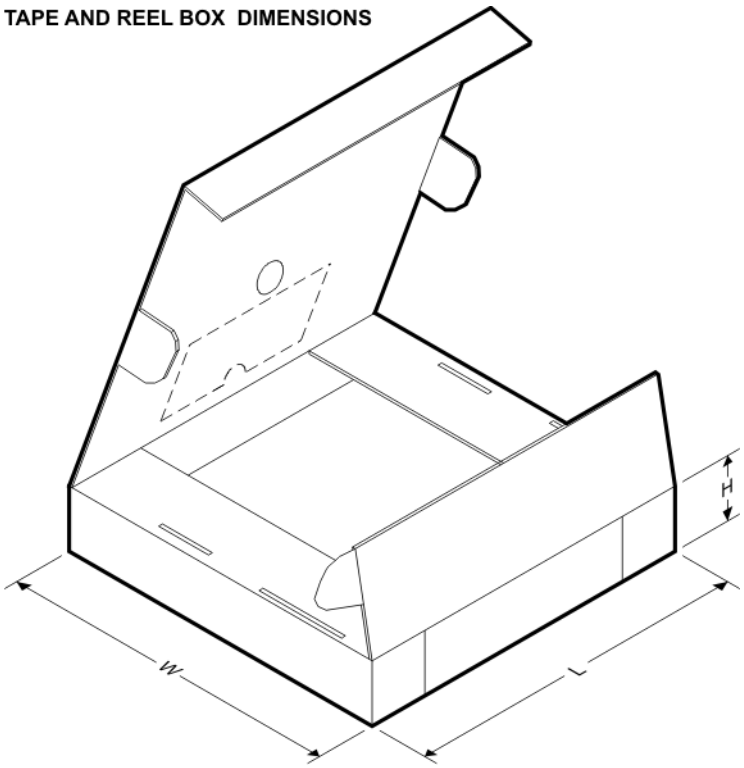


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
DS90CF564MTDX/NOPB	TSSOP	DGG	48	1000	367.0	367.0	45.0

DGG (R-PDSO-G)** **PLASTIC SMALL-OUTLINE PACKAGE**

48 PINS SHOWN

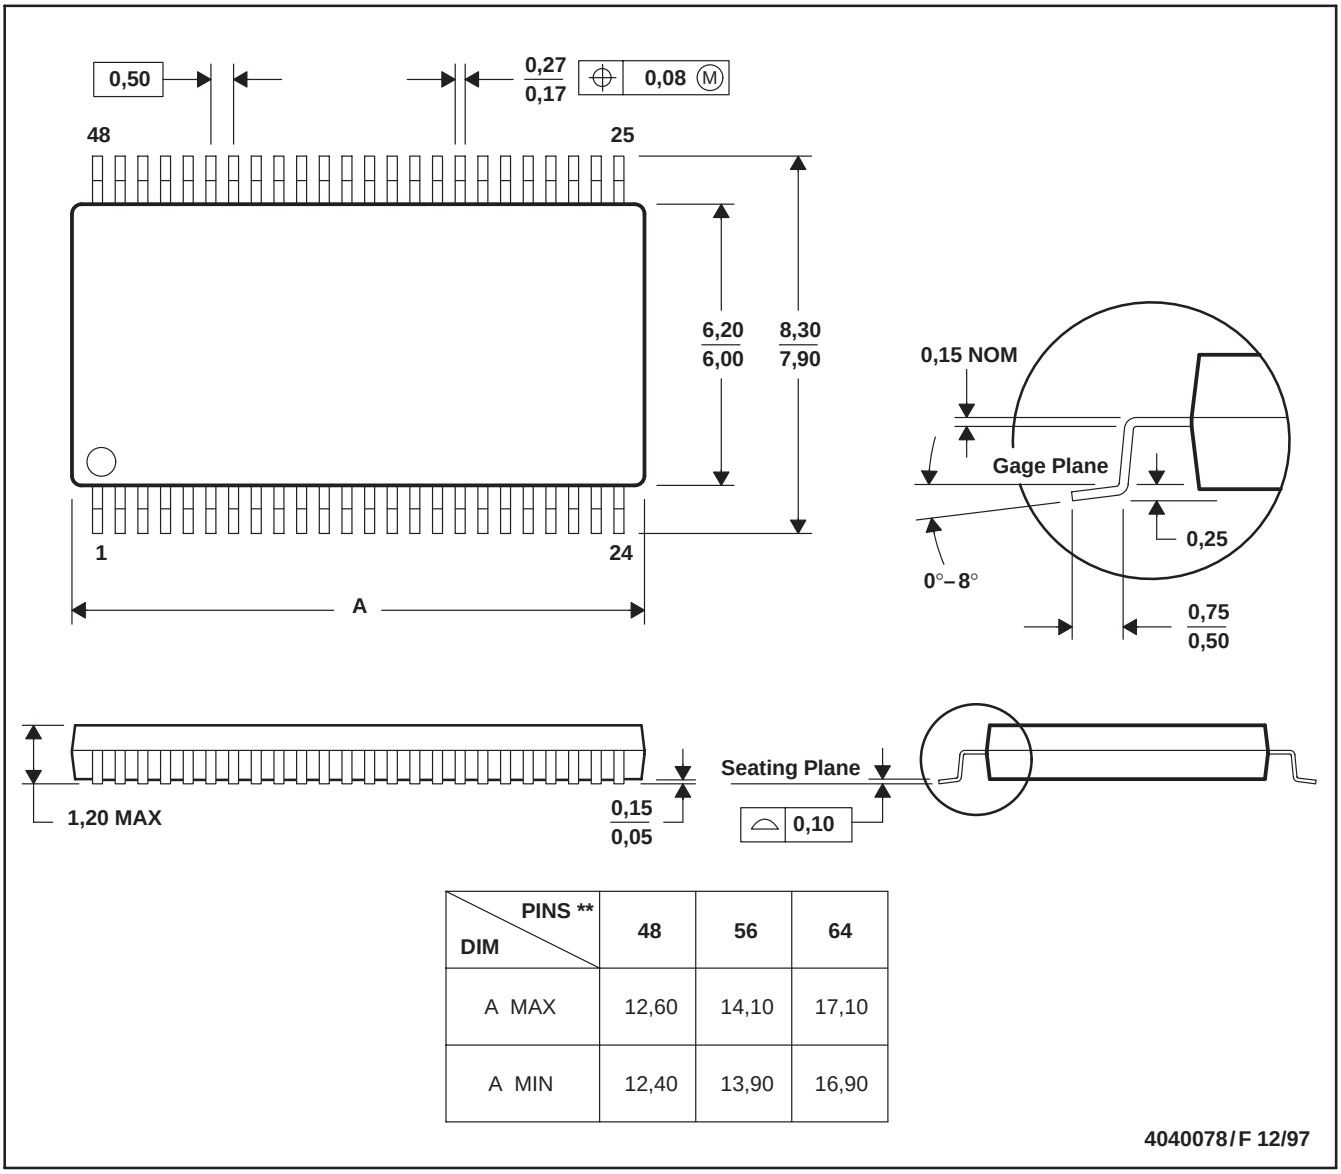

DIM \ PINS **	48	56	64
A MAX	12,60	14,10	17,10
A MIN	12,40	13,90	16,90

NOTES: A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Body dimensions do not include mold protrusion not to exceed 0,15.
D. Falls within JEDEC MO-153

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI’s products are provided subject to TI’s Terms of Sale (www.ti.com/legal/termsofsale.html) or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI’s provision of these resources does not expand or otherwise alter TI’s applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2020, Texas Instruments Incorporated