Thermocouple Cold Junction Compensator and Matched Amplifier

FEATURES

- 0.75°C Initial Accuracy (A Version)
- Extremely Low Warmup Drift
- Preset Outputs for Type E, J, K, R, S, T
- Single 5V to ±20V Operation
- 480μA Typical Supply Current
- Available in 8-Pin DIP Package

APPLICATIONS

- Thermocouple Cold Junction Compensation

DESCRIPTION

The LTK001 is a thermocouple amplifier supplied with a matched cold junction compensator. By separating the amplifier and compensator functions, the problem of compensator temperature rise is virtually eliminated. The compensator is a selected version of the LT®1025 cold junction compensator. The amplifier, which is also available separately as LTKA0x has been specially selected for thermocouple applications. It has low supply current to minimize warmup drift, very low offset voltage (<35μV), high gain, and extremely low input bias currents (<600pA) to allow high impedance input filters to be used without degrading offset voltage or drift.

Matching of the kits is accomplished by separating the compensators and amplifiers according to the polarity of their initial (room temperature) errors. This eliminates the need to sum the errors of the two components to find the worst-case error.


The LTK001 has direct thermocouple outputs of 60.9μV/°C (E), 51.7μV/°C (J), 40.6μV/°C (K, T), and 5.95μV/°C (R, S). It also has a 10mV/°C output which can be scaled to match any arbitrary thermocouple.

For multiple thermocouple applications using one compensator, amplifiers may be ordered separately (LTKA0x), still matched to the compensator.

LT, LTC and LT are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners. For typical performance curves and applications circuits consult the LT1025 data sheet.

TYPICAL APPLICATION

Type K 10mV/°C Thermometer

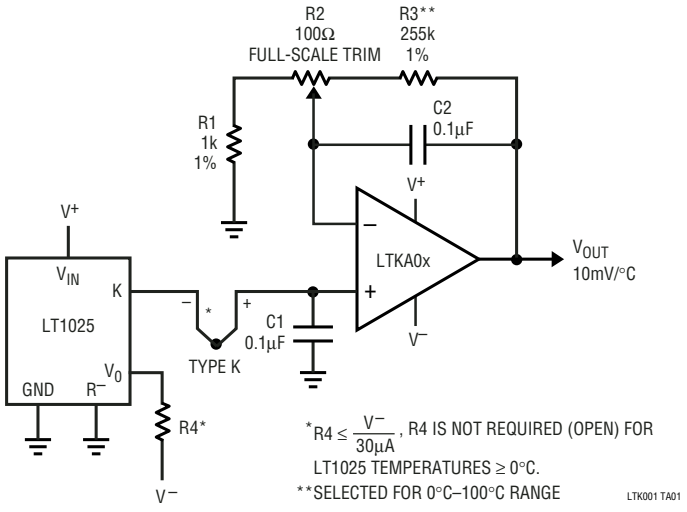

ABSOLUTE MAXIMUM RATINGS (Note 1)

Amplifier (LTKA0x)

Supply Voltage (Total V^+ to V^-) 40V
Differential Input Current (Note 2) ..... ±10mA
Common Mode Input Voltage ..... Equal to Supplies
Output Short-Circuit Duration ..... Indefinite


Compensator (LT1025)

Supply Voltage (V_{IN} to Ground Pin) 36V
Output Voltage (Forced) 5V
Output Short-Circuit Duration ..... Indefinite

Both Devices


Operating Temperature Range
LTK001AMJ8, LTK001MJ8 **(OBSOLETE)** ..... –55°C to 125°C
LTK001ACN8, LTK001CN8 ..... 0°C to 70°C
Storage Temperature Range ..... –65°C to 150°C
Lead Temperature Range (Soldering, 10 sec.)..... 300°C

PACKAGE/ORDER INFORMATION

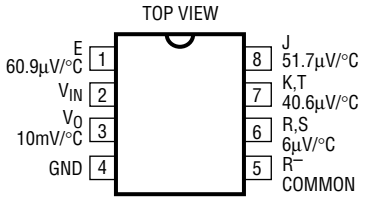


N8 PACKAGE
8-LEAD PDIP
COMPENSATOR
(LT1025)

T_{JMAX} = 100°C, θ_{JA} = 130°C/W (N8)

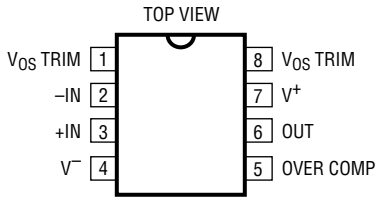

N8 PACKAGE
8-LEAD PDIP AMPLIFIER
(LTKA0x)

T_{JMAX} = 100°C, θ_{JA} = 130°C/W



H PACKAGE
8-LEAD TO-5 METAL CAN
AMPLIFIER (LTKA0x)

T_{JMAX} = 150°C, θ_{JA} = 150°C/W, θ_{JC} = 45°C/W

ORDER PART NUMBER	ORDER PART NUMBER	ORDER PART NUMBER
KIT LTK001CN8 LTK001ACN8	**AMPLIFIER ONLY** **(Note A)** LTKA00CN8 LTKA01CN8	**AMPLIFIER ONLY** **(Note A)** LTKA00MH LTKA01MH
J8 PACKAGE 8-LEAD CERDIP COMPENSATOR (LT1025) T_{JMAX} = 150°C, θ_{JA} = 100°C/W (J8) LTK001MJ8 LTK001AMJ8 **OBSOLETE PACKAGE** Consider the N8 Package for Alternate Source		**OBSOLETE PACKAGE**

Note A: The polarity of the amplifier is indicated by the 0 or 1 in the part number. An LT1025 with a 0 identifier is properly matched with an LTKA00, while an LT1025 with a 1 identifier should be used with an LTKA01.

Consult factory for parts specified with wider operating temperature ranges.

ELECTRICAL CHARACTERISTICS (Matched Amplifier and Compensator)

T_A = 25°C, V_S = ±15V (Amplifier), V_S = 5V (Compensator)

PARAMETER	CONDITIONS		LTK001A MIN	LTK001A TYP	LTK001A MAX	LTK001 MIN	LTK001 TYP	LTK001 MAX	UNITS
Total Temperature Error at 25°C (Note 3)		Type E			0.75			2.5	°C
		Type J			0.75			2.5	°C
		Type K, T			0.86			2.5	°C
		Type R, S	(Note 12)		5.0			5.0	°C
Slope Error (Notes 4 and 9)	0°C ≤ T_J ≤ 70°C	Type E			0.05			0.09	°C/°C
		Type J			0.06			0.09	°C/°C
		Type K, T			0.07			0.10	°C/°C
		Type R, S			0.28			0.32	°C/°C
Total Temperature Error at Temperature Extremes (Note 9)	0°C ≤ T_J ≤ 70°C	Type E			2.0			5	°C
		Type J			2.1			5	°C
		Type K, T			2.6			5.2	°C
		Type R, S	(Note 12)		16			16	°C
	–55°C ≤ T_J ≤ 125°C	Type E			6			8.5	°C
		Type J			6			8.5	°C
		Type K, T			6.3			9	°C
		Type R, S	(Note 12)		30			30	°C
Temperature Error Change with Supply Voltage (Note 5)					0.1			0.1	°C/V
Supply Current				480	900		480	900	µA

ELECTRICAL CHARACTERISTICS (Compensator LT1025)

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at T_A = 25°C. V_S = 5V unless otherwise noted.

PARAMETER	CONDITIONS		COMPENSATOR (LT1025) MIN	TYP	MAX	UNITS
Temperature Error at 10mV/°C Output (Note 9)	T_J = 25°C, LTK001A T_J = 25°C, LTK001			0.3 0.5	0.5 2.0	°C °C
	Full Temperature Span	●	See Curve on LT1025 Data Sheet			
Temperature Error at Individual Outputs (Note 10)	LTK001A: E, J, K, T LTK001A: R, S			0.4 0.4	0.75 1.5	°C °C
	LTK001: E, J, K, T LTK001: R, S			0.8 1.2	2.4 3.5	°C °C
	Full Temperature Span	●	See Curve on LT1025 Data Sheet			
Supply Current	4V ≤ V_{IN} ≤ 36V			80	100	µA
	0°C ≤ T_J ≤ 70°C	●			150	µA
	–55°C ≤ T_J ≤ 125°C	●			200	µA
Change in Supply Current	4V ≤ V_{IN} ≤ 36V			0.01	0.05	µA/V
Line Regulation (Note 11)	4V ≤ V_{IN} ≤ 36V 10mV/°C Output	●		0.003	0.02	°C/V
Load Regulation (Note 11)	0 ≤ I_O ≤ 1mA 10mV/°C Output	●		0.04	0.2	°C
Divider Impedance	E J K, T R, S			2.5 2.1 4.4 3.8		kΩ kΩ kΩ kΩ

ELECTRICAL CHARACTERISTICS (Amplifier LTKA0x)

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at T_A = 25°C. V_S = ±15V, V_{CM} = 0V, T_J = 25°C unless otherwise noted.

PARAMETER	CONDITIONS			AMPLIFIER (LTKA0x) MIN	TYP	MAX	UNITS
Input Offset Voltage					10	35	µV
Input Offset Voltage Drift with Temperature	(Note 6)		●		0.3	1.5	µV/°C
Input Bias Current	0°C ≤ T_A ≤ 70°C –55°C ≤ T_A ≤ 125°C		● ●		±200 ±300	±600 ±1500	pA pA
Input Bias Current Drift with Temperature	(Note 6)				1	5	pA/°C
Input Offset Current	0°C ≤ T_A ≤ 70°C –55°C ≤ T_A ≤ 125°C		● ●		±100 ±200	±500 ±700	pA pA
Input Offset Current Drift with Temperature	(Note 6)		●		0.6	4	pA/°C
Large Signal Voltage Gain	R_L = 10kΩ		●	400	2000		V/mV
Common Mode Rejection Ratio	V_{CM} = ±13.5V		●	106	130		dB
Power Supply Rejection Ratio	±2.5V ≤ V_S ≤ ±20V (Note 5)		●	106	125		dB
Common Mode Input Voltage Range	Notes 6, 7	Above V^-		0.75			V
		Below V^+				1.0	V
Output Voltage Swing (Notes 6, 8)	Referred to Supplies	I_{OUT} = 0.1mA			0.8		V
		I_{OUT} = 1mA			1.1		V
Supply Current			●		400	800	µA
Supply Voltage Range	Total V^+ to V^- Voltage		●	4.5		40	V

Note 1: Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.

Note 2: The inputs of the LTKA0x amplifier are clamped with diodes, so a differential voltage rating does not apply.

Note 3: Total temperature error is the overall error at 25°C taking into account the offset of the amplifier, the offset at the compensator 10mV/°C output, and the error in the compensator divider network. Warmup drift is not included.

Note 4: Slope error is the increase in total temperature error as ambient temperature is increased. It is guaranteed by design and by other tests, but is not tested directly.

Note 5: This is a worst-case limit assuming that any or all supply voltages change.

Note 6: Guaranteed, but not tested.

Note 7: By referring common mode range to the supplies, the range referred to ground can be quickly calculated for any given supply voltage. With a single 5V supply, for instance, which has a worst-case low value of 4.7V, the upper common mode limit is 4.7V – 1V = 3.7V. The lower common mode limit is 0V + 0.75V = 0.75V. With ±15V supplies, the limits would be 14V and –14.25V, respectively. Common mode range has a temperature sensitivity of ≈2mV/°C.

Note 8: Absolute output voltage swing is calculated by subtracting the given limits from actual supply voltage. These limits indicate the point where offset voltage has changed suddenly by 5µV.

Note 9: Temperature error is defined as the deviation from the following formula:

$V_{OUT} = \alpha(T) + \alpha\beta(T - 25°C)^2$

α = Typical thermocouple Seebeck coefficient as follows, E = 60.9µV/°C, J = 51.7µV/°C, K, T = 40.6µV/°C, R, S = 5.95µV/°C.

α = 10mV/°C at the 10mV output.

β = Nonlinearity coefficient built into the LT1025 to help compensate for the nonlinearities of thermocouples. $\beta = 5.5 \times 10^{-4}$, generating 0.34°C bow for 25°C temperature change, and 1.36°C bow for 50°C change.

Note 10: Temperature error at the individual outputs is the sum of the 10mV/°C output error plus the resistor divider error.

Note 11: Line and load regulation do not take into account the effects of self-heating. Output changes due to self-heating can be calculated as follows:

ΔV_{OUT} (Line) = $\Delta V_{IN}(I_q + I_{load})(150°C/W)$


ΔV_{OUT} (Load) = $(\Delta I_{load})(V_{IN})(150°C/W)$
= LT1025 supply current

Load regulation is 30µA ≤ I_O ≤ 1mA for T_A ≤ 0°C.

Note 12: Larger errors with type R and S thermocouples are due mostly to 35µV offset of the amplifier. This error can be reduced to 5µV max with the LTC®1050 or LTC1052 operational amplifiers.

PACKAGE DESCRIPTION

H Package
8-Lead TO-5 Metal Can (.200 Inch PCD)
(Reference LTC DWG # 05-08-1320)

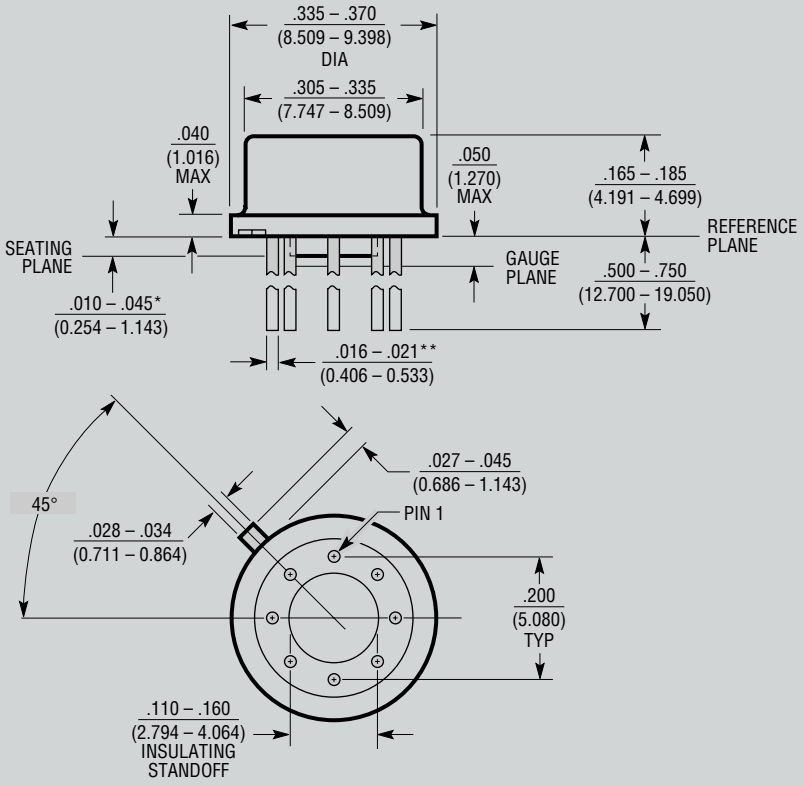


*LEAD DIAMETER IS UNCONTROLLED BETWEEN THE REFERENCE PLANE AND THE SEATING PLANE

**FOR SOLDER DIP LEAD FINISH, LEAD DIAMETER IS $\frac{.016 – .024}{(0.406 – 0.610)}$ H8(TO-5) 0.200 PCD 0204

OBSOLETE PACKAGE

PACKAGE DESCRIPTION

J8 Package
8-Lead CERDIP (Narrow .300 Inch, Hermetic)
(Reference LTC DWG # 05-08-1110)

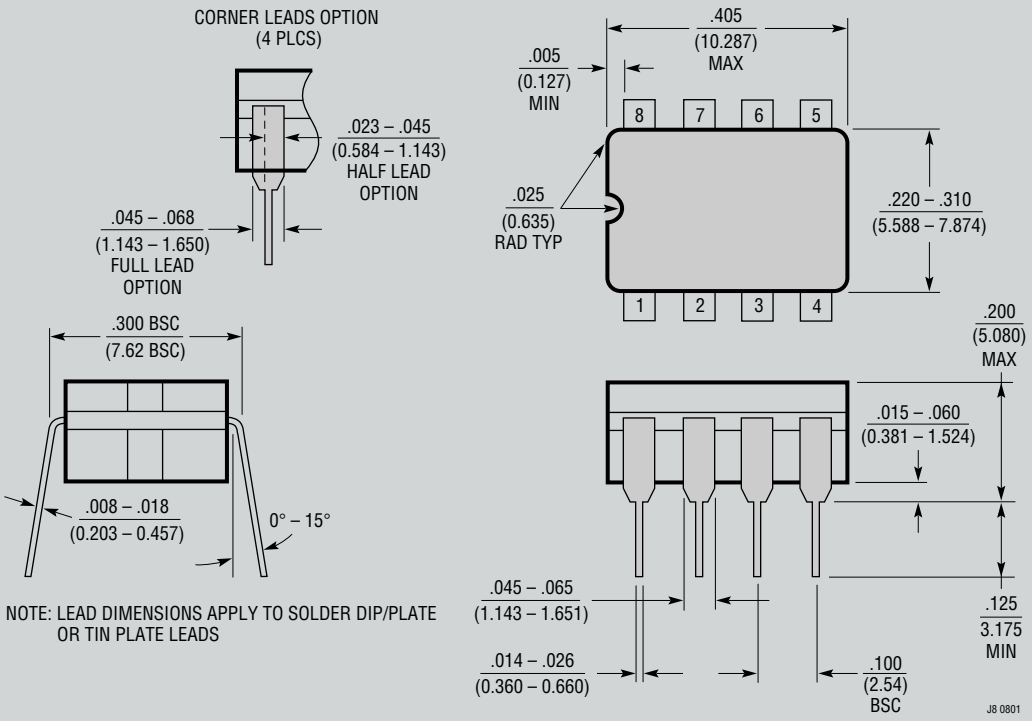


OBSOLETE PACKAGE

Information furnished by Linear Technology Corporation is believed to be accurate and reliable. However, no responsibility is assumed for its use. Linear Technology Corporation makes no representation that the interconnection of its circuits as described herein will not infringe on existing patent rights.

PACKAGE DESCRIPTION

N8 Package
8-Lead PDIP (Narrow .300 Inch)
(Reference LTC DWG # 05-08-1510)

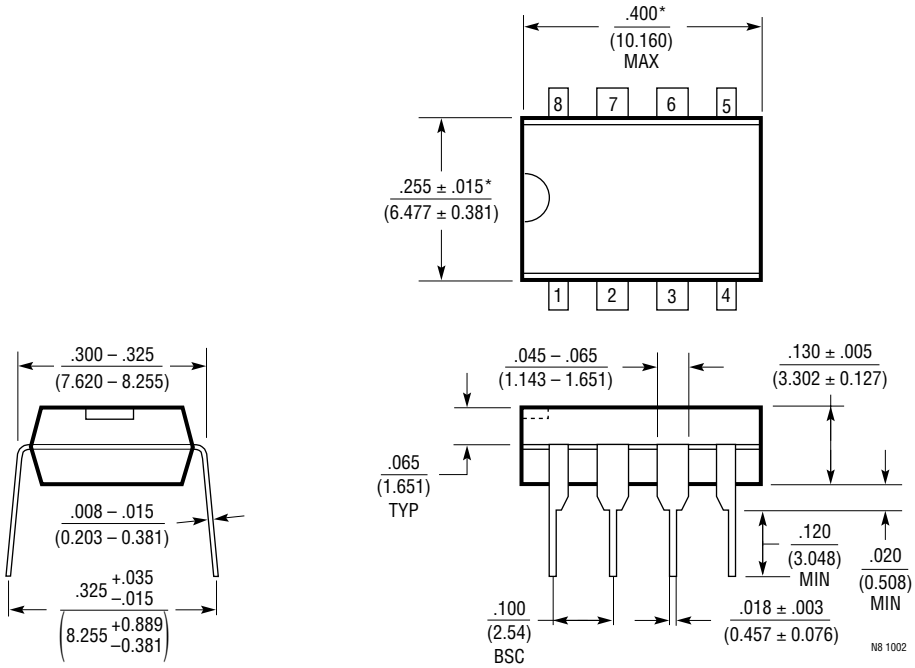

NOTE:
1. DIMENSIONS ARE $\frac{\text{INCHES}}{\text{MILLIMETERS}}$

*THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .010 INCH (0.254mm)

RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
LT1012	Picoamp Input Current Amplifier	V_{OS} = 120μV MAX, I_{OS} = 280pA MAX
LT1025	Thermocouple Cold Junction Comparator	Micropower, 0.5°C Initial Accuracy
LTC1050	Zero Drift Amplifier	V_{OS} = 5μV MAX, A_{VOL} = 1V/μV MAX
LTC2050	SOT-23 Zero Drift Amplifier	V_{OS} = 3μV MAX

Linear Technology Corporation
1630 McCarthy Blvd., Milpitas, CA 95035-7417
(408)432-1900 • FAX: (408) 434-0507 • www.linear-tech.com
LT/LT 0305 REV A • PRINTED IN USA
© LINEAR TECHNOLOGY CORPORATION 2001