VNQ810PEP-E

Quad channel high side driver

Features

Type	$R_{DS(on)}$	I_{OUT}	V_{CC}
VNQ830PEP-E	160 mΩ(1)	5 A(1)	36 V

1. Per each channel.

- CMOS compatible inputs
- Open Drain status outputs
- On-state open load detection
- Off-state open load detection
- Shorted load protection
- Undervoltage and overvoltage shutdown
- Loss of ground protection
- Very low standby current
- Reverse battery protection(a)
- In compliance with the 2002/95/EC european directive



PowerSSO-24

Description

The VND810PEP-E is a monolithic device made using STMicroelectronics VIPower M0-3 Technology. The VNQ810PEP-E is intended for driving any type of multiple load with one side connected to ground.

The Active V_{CC} pin voltage clamp protects the device against low energy spikes (see ISO7637 transient compatibility table).

Active current limitation combined with thermal shutdown and automatic restart protects the device against overload. The device detects the open load condition in both the on and off-state.

In the off-state the device detects if the output is shorted to V_{CC}. The device automatically turns off in the case where the ground pin becomes disconnected.

Obsolete Product(s) - Obsolete Product(s)

a. See *Application schematic on page 17*

Table 1. Device summary

Package	Order codes	
	Tube	Tape and reel
PowerSSO-24	VNQ810PEP-E	VNQ810PEPTR-E

Contents

1 **Block diagram and pin description 5**

2 **Electrical specifications 6**

2.1 Absolute maximum ratings 6

2.2 Thermal data 7

2.3 Electrical characteristics 7

2.4 Electrical characteristics curves 14

3 **Application information 17**

3.1 GND protection network against reverse battery 17

3.1.1 Solution 1: a resistor in the ground line (RGND only) 17

3.1.2 Solution 2: a diode (D_{GND}) in the ground line 18

3.2 Load dump protection 18

3.3 MCU I/O protection 18

3.4 Open load detection in off-state 19

3.5 Maximum demagnetization energy (V_{CC} = 13.5V) 20

4 **Package and PC board thermal data 21**

4.1 PowerSSO-24 thermal data 21

5 **Package and packing information 24**

5.1 ECOPACK® packages 24

5.2 PowerSSO-24 mechanical data 24

5.3 Packing information 26

6 **Revision history 27**

Obsolete Product(s) - Obsolete Product(s)

List of tables

Table 1. Device summary . . . 1
Table 2. Suggested connections for unused and not connected pins . . . 5
Table 3. Absolute maximum ratings . . . 6
Table 4. Thermal data (per island) . . . 7
Table 5. Power output . . . 8
Table 6. Protections and diagnostics . . . 8
Table 7. V_{CC} - output diode . . . 9
Table 8. Switching (V_{CC} = 13V; Tj = 25°C) . . . 9
Table 9. Logic inputs . . . 9
Table 10. Status pin . . . 9
Table 11. Openload detection . . . 9
Table 12. Truth table . . . 11
Table 13. Electrical transient requirements (part 1/3) . . . 11
Table 14. Electrical transient requirements (part 2/3) . . . 11
Table 15. Electrical transient requirements (part 3/3) . . . 12
Table 16. Thermal parameters . . . 23
Table 17. PowerSSO-24 mechanical data . . . 25
Table 18. Document revision history . . . 27

Obsolete Product(s) - Obsolete Product(s)

List of figures

Figure 1. Block diagram . . . 5
Figure 2. Configuration diagram (top view) . . . 5
Figure 3. Current and voltage conventions . . . 7
Figure 4. Status timings . . . 10
Figure 5. Switching characteristics . . . 10
Figure 6. Waveforms . . . 13
Figure 7. Off-state output current . . . 14
Figure 8. High level input current . . . 14
Figure 9. Input clamp voltage . . . 14
Figure 10. Turn-on voltage slope . . . 14
Figure 11. Overvoltage shutdown . . . 14
Figure 12. Turn-off voltage slope . . . 14
Figure 13. ILIM vs Tcase . . . 15
Figure 14. On-state resistance vs VCC . . . 15
Figure 15. Input high level . . . 15
Figure 16. Input hysteresis voltage . . . 15
Figure 17. On-state resistance vs Tcase . . . 15
Figure 18. Input low level . . . 15
Figure 19. Status leakage current . . . 16
Figure 20. Status low output voltage . . . 16
Figure 21. Status clamp voltage . . . 16
Figure 22. Openload on-state detection threshold . . . 16
Figure 23. Openload off-state voltage detection threshold . . . 16
Figure 24. Application schematic . . . 17
Figure 25. Openload detection in Off-state . . . 19
Figure 26. Maximum turn-off current versus load inductance . . . 20
Figure 27. PowerSSO-24 PC board . . . 21
Figure 28. Rthj-amb vs. PCB copper area in open box free air condition (one channel ON) . . . 21
Figure 29. PowerSSO-24 thermal impedance junction ambient single pulse (one channel ON) . . . 22
Figure 30. Thermal fitting model of a double channel HSD in PowerSSO-24 . . . 22
Figure 31. PowerSSO-24 package dimensions . . . 24
Figure 32. PowerSSO-24 tube shipment (no suffix) . . . 26
Figure 33. PowerSSO-24 tape and reel shipment (suffix “TR”) . . . 26

Obsolete Product(s) - Obsolete Product(s)

1 Block diagram and pin description

Figure 1. Block diagram


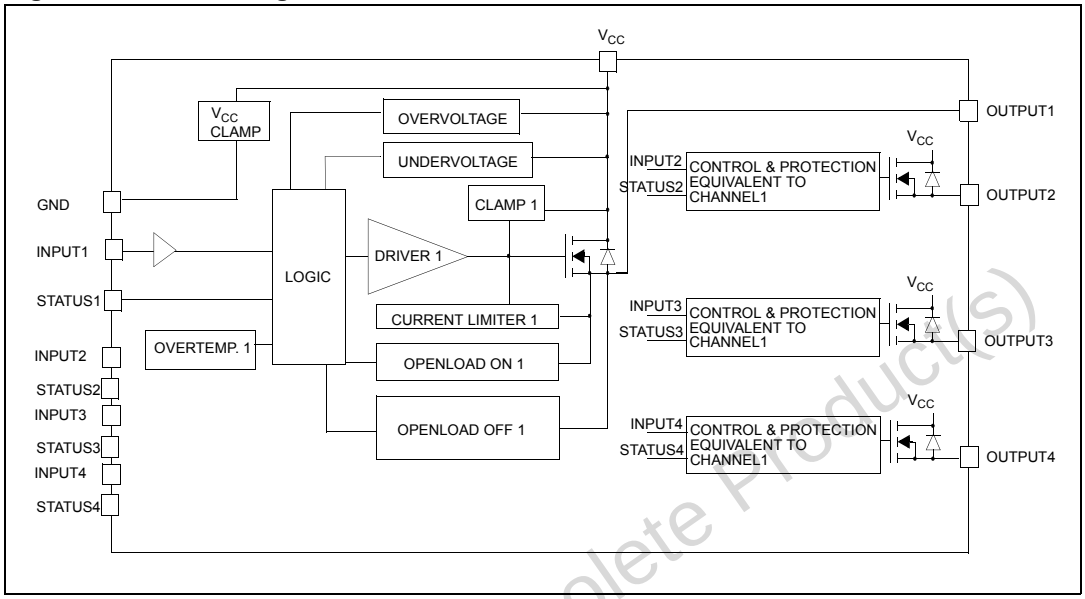


Figure 2. Configuration diagram (top view)

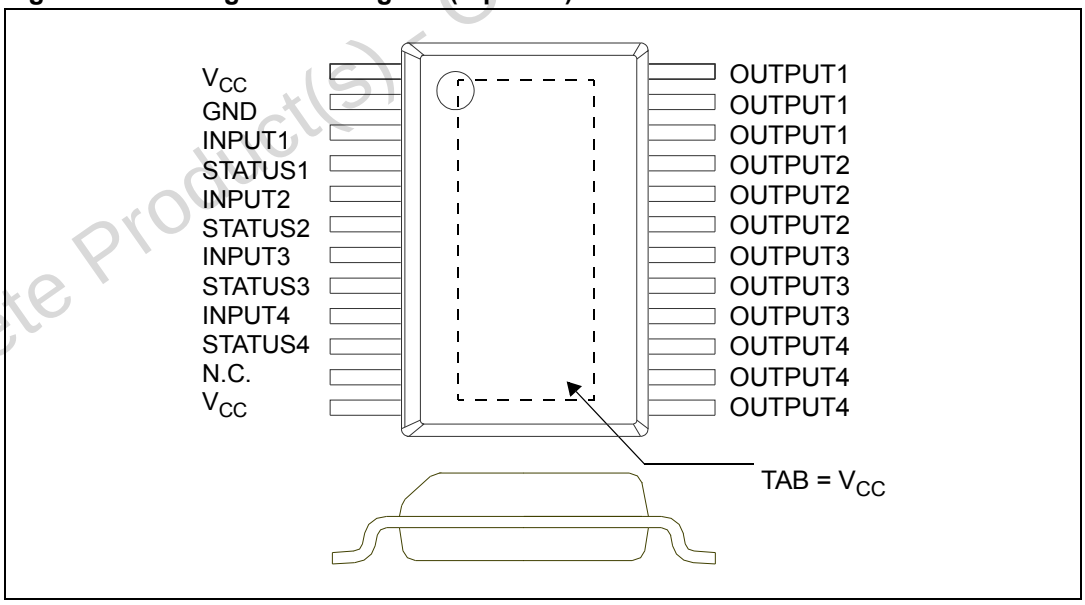

Obsolete Product(s) - Obsolete Product(s)

Table 2. Suggested connections for unused and not connected pins

Connection / pin	Status	N.C.	Output	Input
Floating	X	X	X	X
To ground		X		Through 10KΩ resistor

2 Electrical specifications

2.1 Absolute maximum ratings

Stressing the device above the rating listed in the “Absolute maximum ratings” table may cause permanent damage to the device. These are stress ratings only and operation of the device at these or any other conditions above those indicated in the Operating sections of this specification is not implied. Exposure to Absolute Maximum Rating conditions for extended periods may affect device reliability. Refer also to the STMicroelectronics SURE Program and other relevant quality document.

Table 3. Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{CC}	DC supply voltage	41	V
- V_{CC}	Reverse DC supply voltage	- 0.3	V
- I_{GND}	DC reverse ground pin current	- 200	mA
I_{OUT}	DC output current	Internally limited	A
- I_{OUT}	Reverse DC output current	- 6	A
I_{IN}	DC input current	+/- 10	mA
I_{STAT}	DC Status current	+/- 10	mA
V_{ESD}	Electrostatic discharge (human body model: R=1.5KΩ; C = 100pF) – Input – Status – Output – V_{CC}	 4000 4000 5000 5000	 V V V V
E_{MAX}	Maximum switching energy (L = 0.6mH; R_L = 0; Vbat = 13.5V; Tjstart = 150ºC; I_L= 7.5A)	22	mJ
P_{tot}	Power dissipation (per island) at T_{lead} = 25°C	66	W
T_j	Junction operating temperature	Internally limited	°C
T_c	Case operating temperature	- 40 to 150	°C
T_{stg}	Storage temperature	- 55 to 150	°C

Obsolete Product(s) - Obsolete Product(s)

2.2 Thermal data

Table 4. Thermal data (per island)


Symbol	Parameter	Value		Unit
$R_{thj\text{-}case}$	Thermal resistance junction-case	1.9		°C/W
$R_{thj\text{-}amb}$	Thermal resistance junction-ambient (one chip ON)	56(1)	42(2)	°C/W

1. When mounted on a standard single-sided FR-4 board with 0.5cm^2 of Cu (at least 35 µm thick). Horizontal mounting and no artificial air flow.
2. When mounted on a standard single-sided FR-4 board with 8cm^2 of Cu (at least 35 µm thick). Horizontal mounting and no artificial air flow.

2.3 Electrical characteristics

Values specified in this section are for 8V < V_{CC} < 36V; -40°C < T_j < 150°C, unless otherwise stated.

Figure 3. Current and voltage conventions

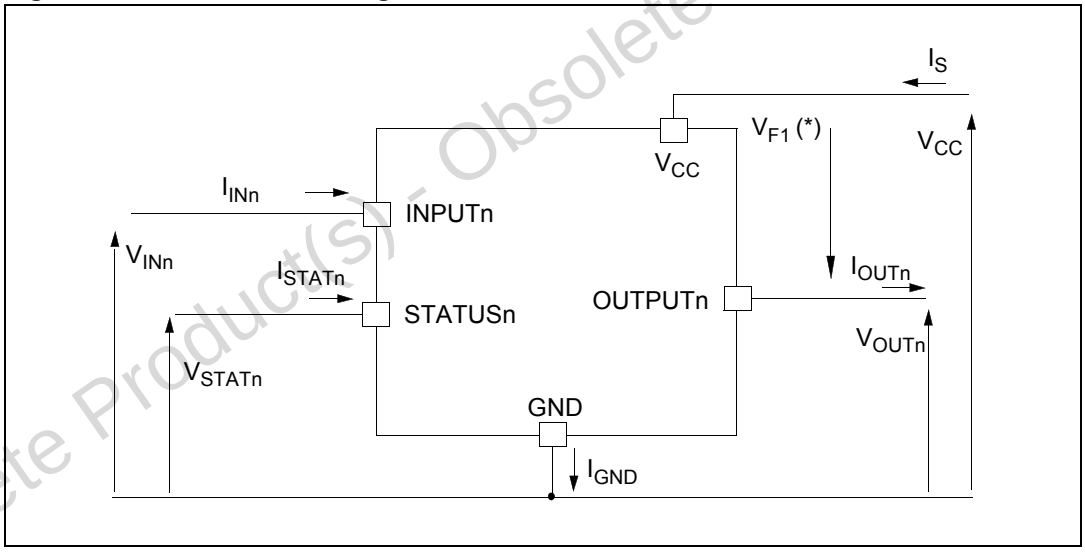

Note: $V_{Fn} = V_{CCn} - V_{OUTn}$ during reverse battery condition.

Obsolete Product(s) - Obsolete Product(s)

Table 5. Power output

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_{CC}	Operating supply voltage		5.5	13	36	V
V_{USD}	Undervoltage shutdown		3	4	5.5	V
V_{OV}	Overvoltage shutdown		36			V
R_{ON}	On-state resistance	I_{OUT} = 1A; T_j = 25°C I_{OUT} = 1A; V_{CC} > 8V			160 120	mΩ mΩ
I_S	Supply current	Off-state; V_{CC} = 13V; V_{IN} = V_{OUT} = 0V Off-state; V_{CC} = 13V; V_{IN} = V_{OUT} = 0V; T_j = 25°C On-state; V_{CC} = 13V; V_{IN} = 5V; I_{OUT} = 0A		20 20 8.5	60 40 13.5	µA µA mA
$I_{L(off1)}$	Off-state output current	V_{IN} = V_{OUT} = 0V	0		50	µA
$I_{L(off2)}$	Off-state output current	V_{IN} = 0V; V_{OUT} = 3.5V	-75		0	µA
$I_{L(off3)}$	Off-state output current	V_{IN} = V_{OUT} = 0V; V_{CC} = 13V; T_j = 125°C			5	µA
$I_{L(off4)}$	Off-state output current	V_{IN} = V_{OUT} = 0V; V_{CC} = 13V; T_j = 25°C			3	µA

Table 6. Protections and diagnostics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
T_{TSD}	Shutdown temperature		150	175	200	°C
T_R	Reset temperature		135			°C
T_{hyst}	Thermal hysteresis		7	15		°C
t_{SDL}	Status delay in overload conditions	T_j > T_{TSD}			20	µs
I_{lim}	Current limitation	V_{CC} = 13V 5.5V < V_{CC} < 36V	5	7.5	10 10	A A
V_{demag}	Turn-off output clamp voltage	I_{OUT} = 1A; L = 6mH	V_{CC} - 41	V_{CC} - 48	V_{CC} - 55	V

Note: To ensure long term reliability under heavy overload or short circuit conditions, protection and related diagnostic signals must be used together with a proper software strategy. If the device is subjected to abnormal conditions, this software must limit the duration and number of activation cycles.

Obsolete Product(s) - Obsolete Product(s)

Table 7. V_{CC} - output diode

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_F	Forward on voltage	- I_{OUT} = 0.5A; T_j = 150°C	-	-	0.6	V

Table 8. Switching (V_{CC} = 13V; T_j = 25°C)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn-on delay time	R_L = 13Ω from V_{IN} rising edge to V_{OUT} = 1.3V (see *Figure 5*)	-	30	-	µs
$t_{d(off)}$	Turn-off delay time	R_L = 13Ω from V_{IN} falling edge to V_{OUT} = 11.7V (see *Figure 5*)	-	30	-	µs
$dV_{OUT}/dt_{(on)}$	Turn-on voltage slope	R_L = 13Ω from V_{OUT} = 1.3V to V_{OUT} = 10.4V (see *Figure 5*)	-	See *Figure 10*	-	V/µs
$dV_{OUT}/dt_{(off)}$	Turn-off voltage slope	R_L = 13Ω from V_{OUT} = 11.7V to V_{OUT} = 1.3V (see *Figure 5*)	-	See *Figure 12*	-	V/µs

Table 9. Logic inputs

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_{IL}	Input low level				1.25	V
I_{IL}	Low level input current	V_{IN} = 1.25V	1			µA
V_{IH}	Input high level		3.25			V
I_{IH}	High level input current	V_{IN} = 3.25V			10	µA
$V_{I(hyst)}$	Input hysteresis voltage		0.5			V
V_{ICL}	Input clamp voltage	I_{IN} = 1mA I_{IN} = -1mA	6	6.8 - 0.7	8	V V

Table 10. Status pin

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_{STAT}	Status low output voltage	I_{STAT} = 1.6mA			0.5	V
I_{LSTAT}	Status leakage current	Normal operation; V_{STAT} = 5V			10	µA
C_{STAT}	Status pin input capacitance	Normal operation; V_{STAT} = 5V			100	pF
V_{SCL}	Status clamp voltage	I_{STAT} = 1mA I_{STAT} = - 1mA	6	6.8 - 0.7	8	V V

Obsolete Product(s) - Obsolete Product(s)

Table 11. Openload detection

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
I_{OL}	Openload On-state detection threshold	V_{IN} = 5V	20	40	80	mA
$t_{DOL(on)}$	Openload On-state detection delay	I_{OUT} = 0A			200	µs
V_{OL}	Openload Off-state voltage detection threshold	V_{IN} = 0V	1.5	2.5	3.5	V
$t_{DOL(off)}$	Openload detection delay at turn-off				1000	µs

Figure 4. Status timings


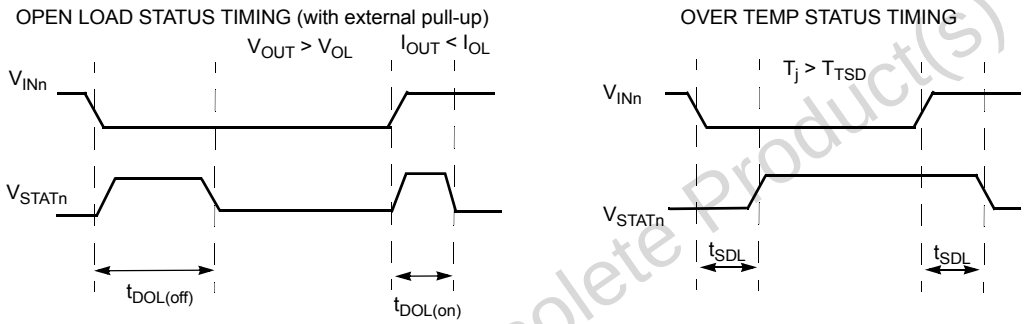


Figure 5. Switching characteristics

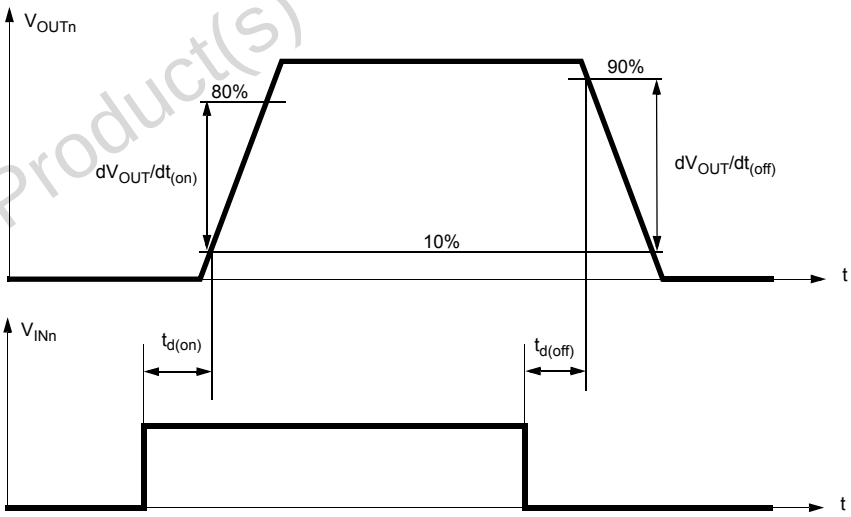

Obsolete Product(s) - Obsolete Product(s)

Table 12. Truth table

Conditions	Input	Output	Status
Normal operation	L H	L H	H H
Current limitation	L H H	L X X	H ($T_j < T_{TSD}$) H ($T_j > T_{TSD}$) L
Overtemperature	L H	L L	H L
Undervoltage	L H	L L	X X
Overvoltage	L H	L L	H H
Output voltage > V_{OL}	L H	H H	L H
Output current < I_{OL}	L H	L H	H L

Table 13. Electrical transient requirements (part 1/3)

ISO T/R 7637/1 Test pulse	Test level				
	I	II	III	IV	Delays and impedance
1	- 25V	- 50V	- 75V	- 100V	2ms, 10Ω
2	+ 25V	+ 50V	+ 75V	+ 100V	0.2ms, 10Ω
3a	- 25V	- 50V	- 100V	- 150V	0.1µs, 50Ω
3b	+ 25V	+ 50V	+ 75V	+ 100V	0.1µs, 50Ω
4	- 4V	- 5V	- 6V	- 7V	100ms, 0.01Ω
5	+ 26.5V	+ 46.5V	+ 66.5V	+ 86.5V	400ms, 2Ω

Table 14. Electrical transient requirements (part 2/3)

ISO T/R 7637/1 Test pulse	Test level			
	I	II	III	IV
1	C	C	C	C
2	C	C	C	C
3a	C	C	C	C
3b	C	C	C	C
4	C	C	C	C
5	C	E	E	E


Obsolete Product(s) - Obsolete Product(s)

Table 15. Electrical transient requirements (part 3/3)

Class	Contents
C	All functions of the device are performed as designed after exposure to disturbance.
E	One or more functions of the device is not performed as designed after exposure and cannot be returned to proper operation without replacing the device.

Obsolete Product(s) - Obsolete Product(s)

Figure 6. Waveforms

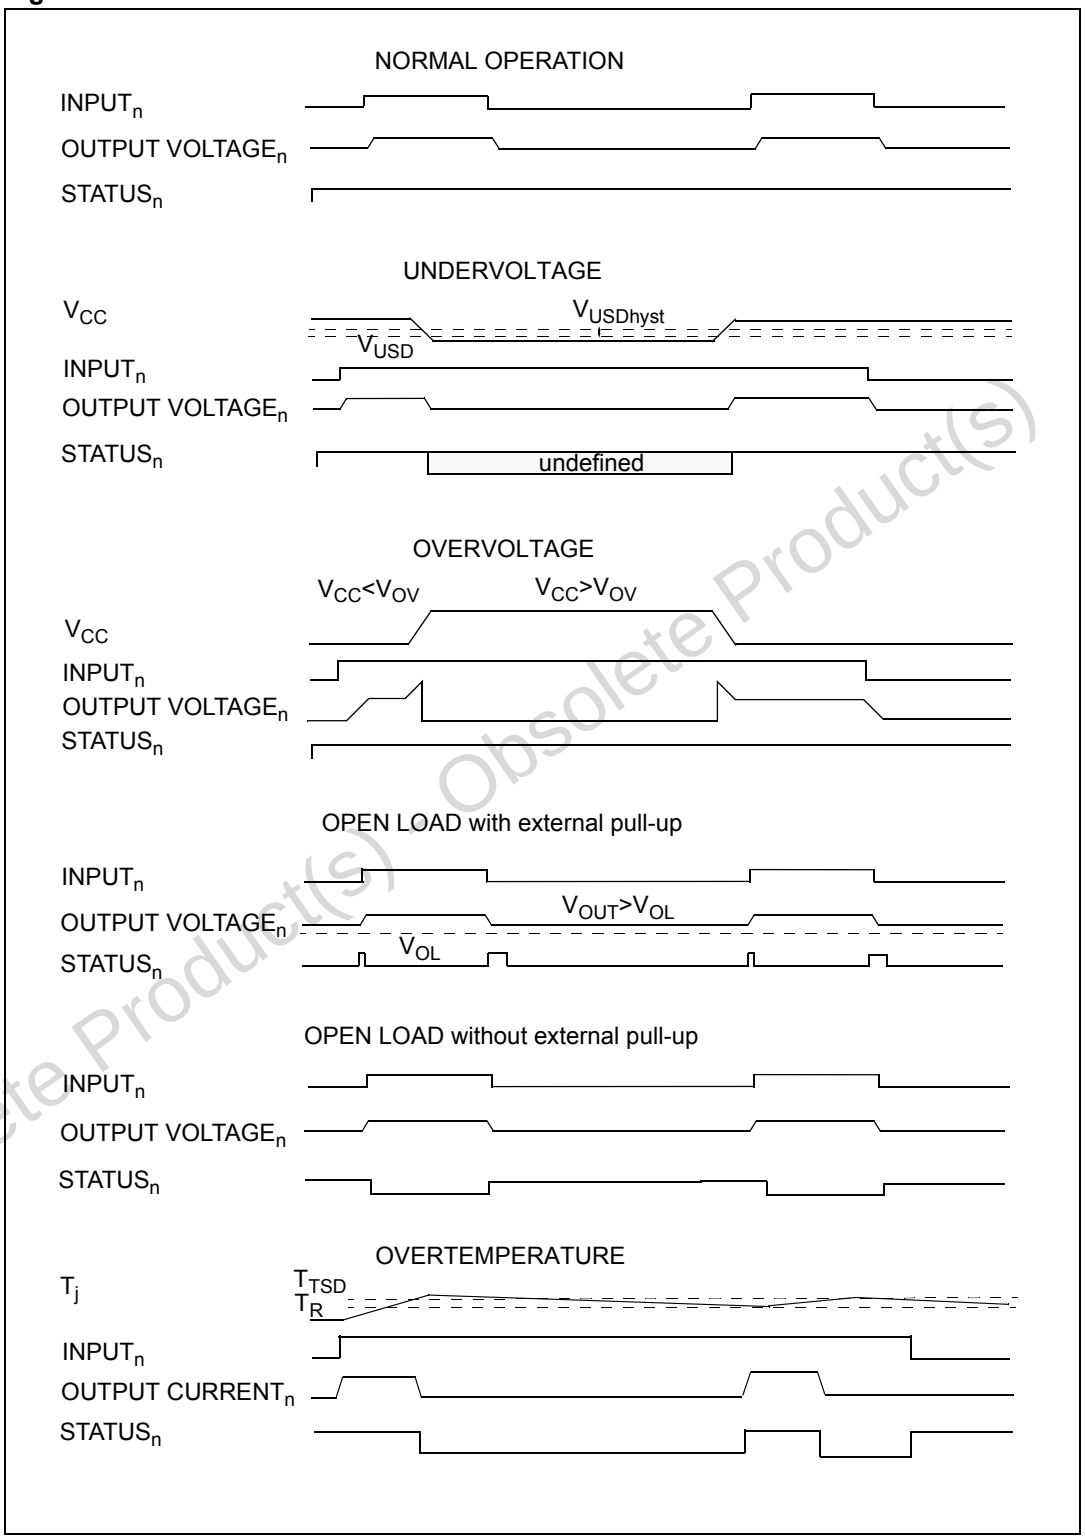

Obsolete Product(s) Obsolete Product(s)

2.4 Electrical characteristics curves

Figure 7. Off-state output current

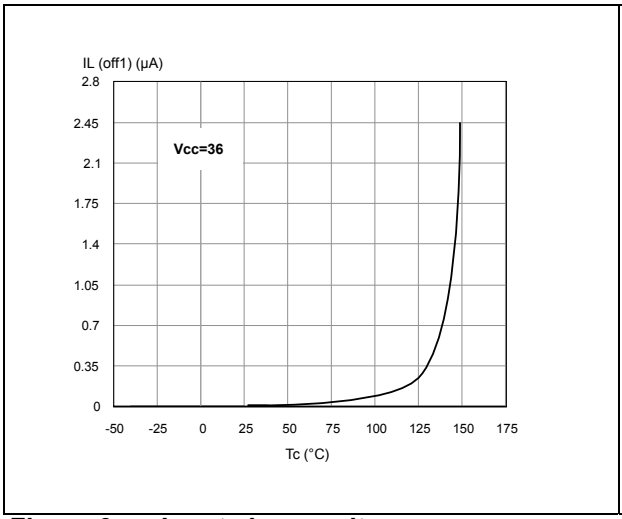


Figure 8. High level input current

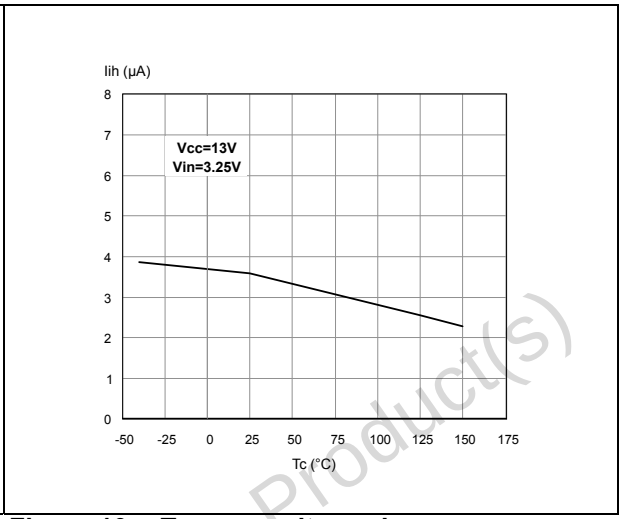


Figure 9. Input clamp voltage

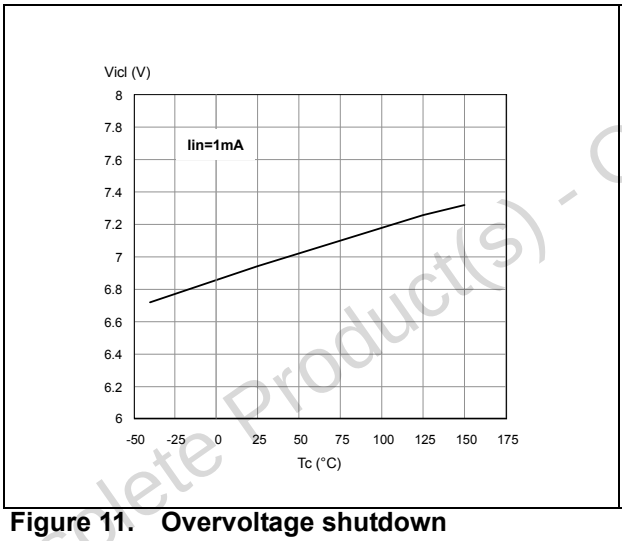


Figure 10. Turn-on voltage slope

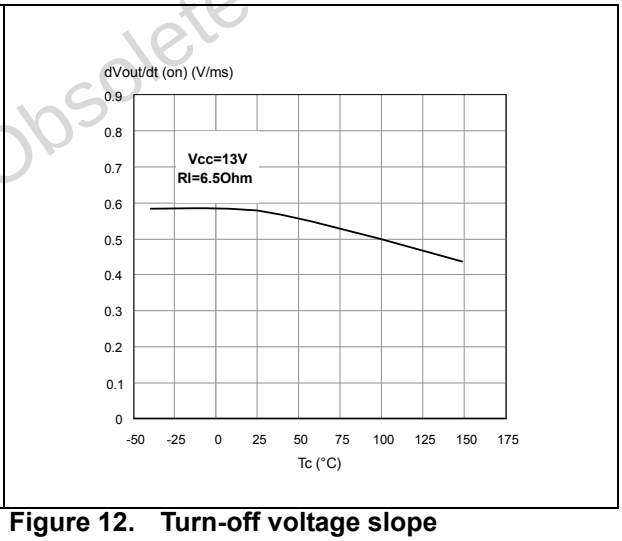


Figure 11. Overvoltage shutdown


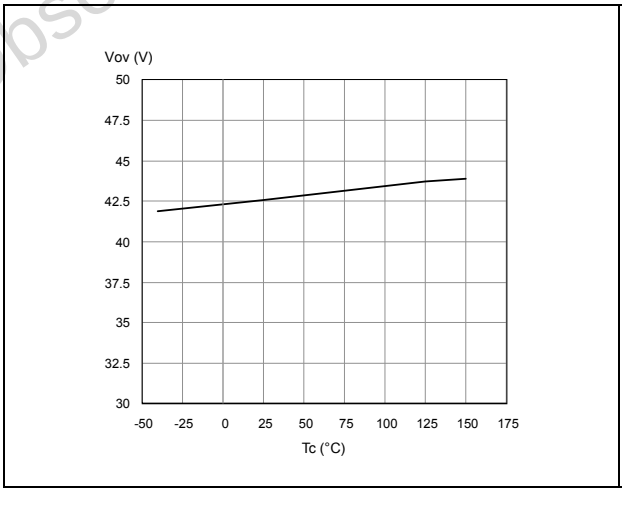


Figure 12. Turn-off voltage slope

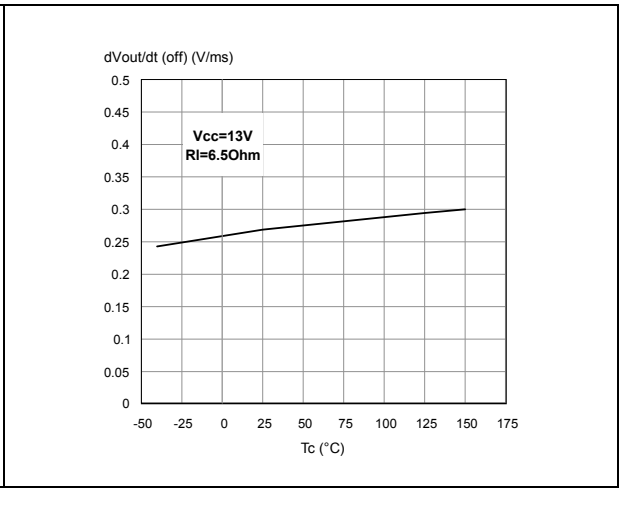

Obsolete Product(s) - Obsolete Product(s)

Figure 13. I_{LIM} vs T_{case}

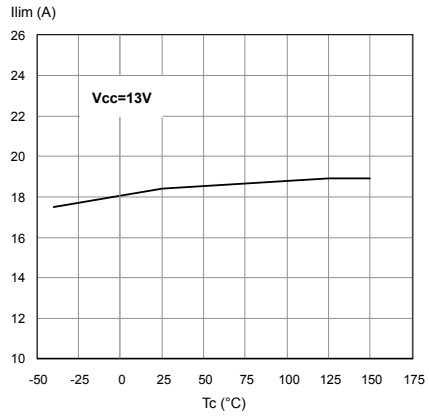


Figure 14. On-state resistance vs V_{CC}

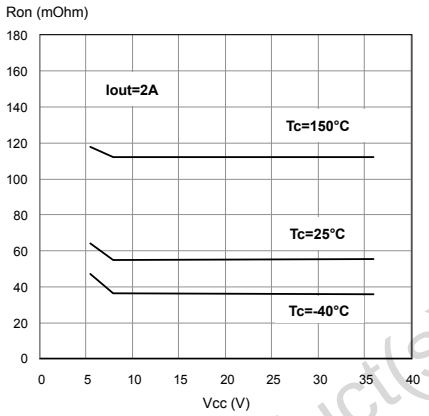


Figure 15. Input high level

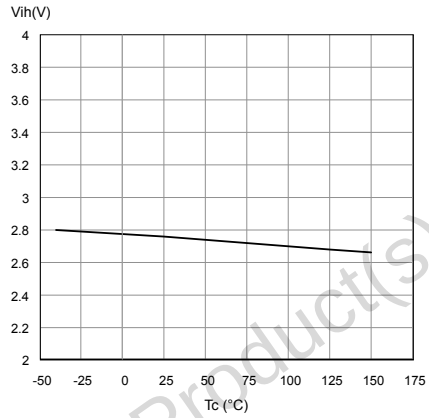


Figure 16. Input hysteresis voltage

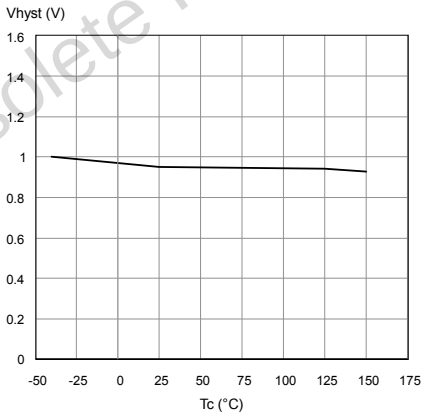


Figure 17. On-state resistance vs Tcase


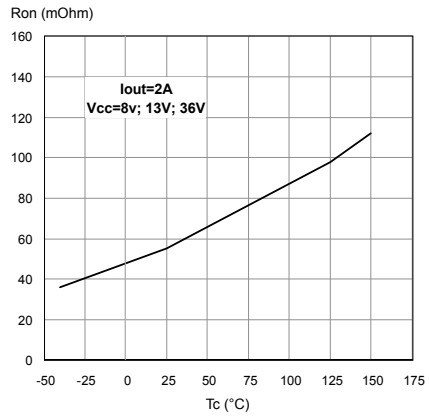


Figure 18. Input low level

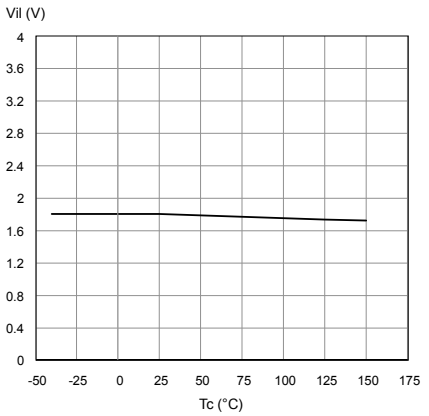

Obsolete Product(s) - Obsolete Product(s)

Figure 19. Status leakage current

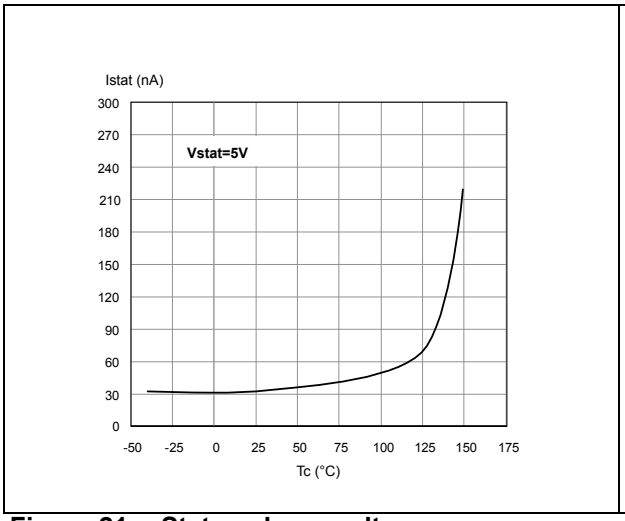


Figure 20. Status low output voltage

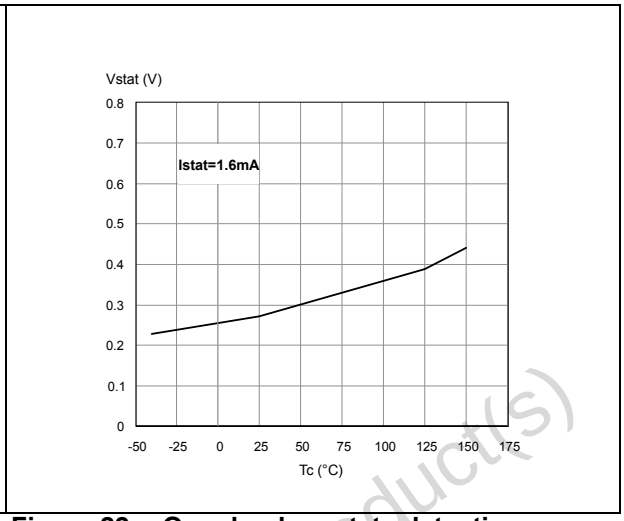


Figure 21. Status clamp voltage

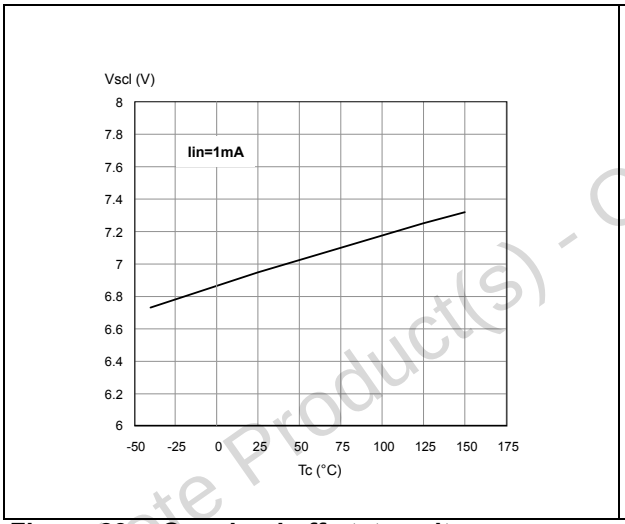


Figure 22. Openload on-state detection threshold


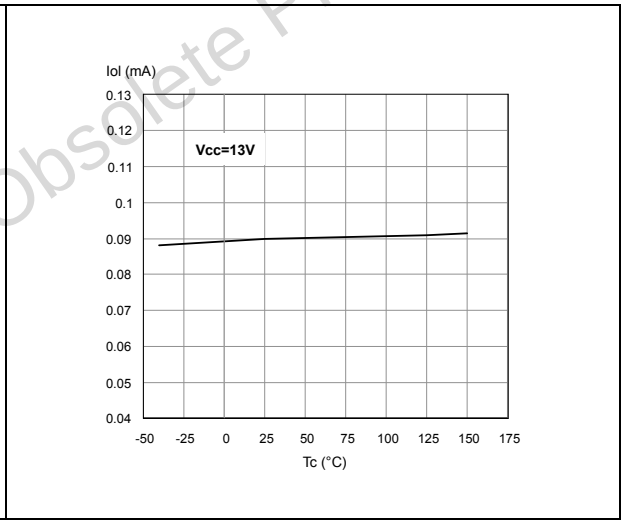



Figure 23. Openload off-state voltage detection threshold

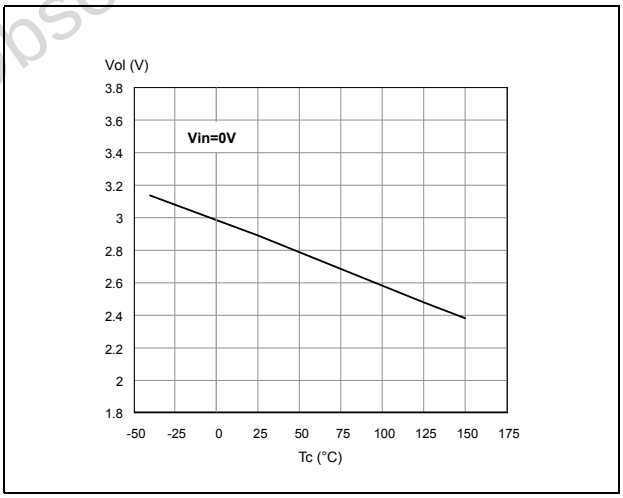

Obsolete Product(s) - Obsolete Product(s)

3 Application information

Figure 24. Application schematic

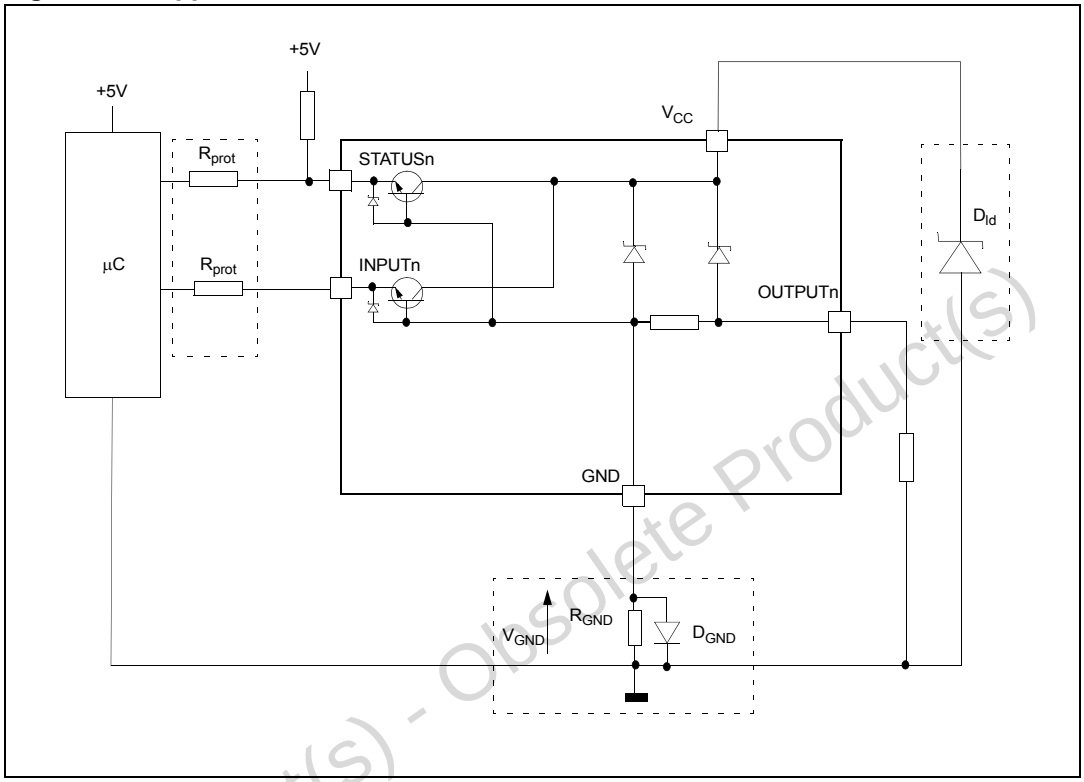

Obsolete Product(s) - Obsolete Product(s)

3.1 GND protection network against reverse battery

This section provides two solutions for implementing a ground protection network against reverse battery.

3.1.1 Solution 1: a resistor in the ground line (R_{GND} only)

This can be used with any type of load.

The following show how to dimension the R_{GND} resistor:

1. $R_{GND} \leq 600mV / 2 (I_{S(on)max})$
2. $R_{GND} \geq (- V_{CC}) / (- I_{GND})$

where $- I_{GND}$ is the DC reverse ground pin current and can be found in the absolute maximum rating section of the device datasheet.

Power dissipation in R_{GND} (when $V_{CC} < 0$ during reverse battery situations) is:

$$P_D = (- V_{CC})^2 / R_{GND}$$

This resistor can be shared amongst several different HSDs. Please note that the value of this resistor should be calculated with formula (1) where $I_{S(on)max}$ becomes the sum of the maximum on-state currents of the different devices.

Please note that, if the microprocessor ground is not shared by the device ground, then the R_{GND} will produce a shift ($I_{S(on)max}$ * R_{GND}) in the input thresholds and the status output values. This shift will vary depending on how many devices are ON in the case of several high side drivers sharing the same R_{GND} .

If the calculated power dissipation requires the use of a large resistor, or several devices have to share the same resistor, then ST suggests using solution 2 below.

3.1.2 Solution 2: a diode (D_{GND}) in the ground line

A resistor (R_{GND} = 1kΩ) should be inserted in parallel to D_{GND} if the device will be driving an inductive load. This small signal diode can be safely shared amongst several different HSD. Also in this case, the presence of the ground network will produce a shift (j600mV) in the input threshold and the status output values if the microprocessor ground is not common with the device ground. This shift will not vary if more than one HSD shares the same diode/resistor network. Series resistor in INPUT and STATUS lines are also required to prevent that, during battery voltage transient, the current exceeds the Absolute Maximum Rating. Safest configuration for unused INPUT and STATUS pin is to leave them unconnected.

3.2 Load dump protection

D_{ld} is necessary (voltage transient suppressor) if the load dump peak voltage exceeds the V_{CC} maximum DC rating. The same applies if the device is subject to transients on the V_{CC} line that are greater than those shown in the ISO T/R 7637/1 table.

3.3 MCU I/O protection

If a ground protection network is used and negative transients are present on the V_{CC} line, the control pins will be pulled negative. ST suggests to insert a resistor (R_{prot}) in line to prevent the µC I/O pins from latching up.

The value of these resistors is a compromise between the leakage current of µC and the current required by the HSD I/Os (Input levels compatibility) with the latch-up limit of µC I/Os:

$$- V_{CCpeak} / I_{latchup} \leq R_{prot} \leq (V_{OH\mu C} - V_{IH} - V_{GND}) / I_{IHmax}$$

Example

For the following conditions:

V_{CCpeak} = - 100V

$I_{latchup} \geq$ 20mA

$V_{OH\mu C} \geq$ 4.5V

5kΩ ≤ R_{prot} ≤ 65kΩ.

Recommended values are:

R_{prot} = 10kΩ

Obsolete Product(s) - Obsolete Product(s)

3.4 Open load detection in off-state

Off-state open load detection requires an external pull-up resistor (R_{PU}) connected between OUTPUT pin and a positive supply voltage (V_{PU}) like the +5V line used to supply the microprocessor.

The external resistor has to be selected according to the following requirements:


1) no false open load indication when load is connected: in this case we have to avoid V_{OUT} to be higher than V_{Olmin}; this results in the following condition

$V_{OUT} = (V_{PU} / (R_L + R_{PU}))R_L < V_{Olmin}$.

2) no misdetection when load is disconnected: in this case the V_{OUT} has to be higher than V_{OLmax}; this results in the following condition $R_{PU} < (V_{PU} - V_{OLmax}) / I_{L(off2)}$.

Because $I_{s(OFF)}$ may significantly increase if V_{out} is pulled high (up to several mA), the pull-up resistor R_{PU} should be connected to a supply that is switched OFF when the module is in standby.


Figure 25. Openload detection in Off-state

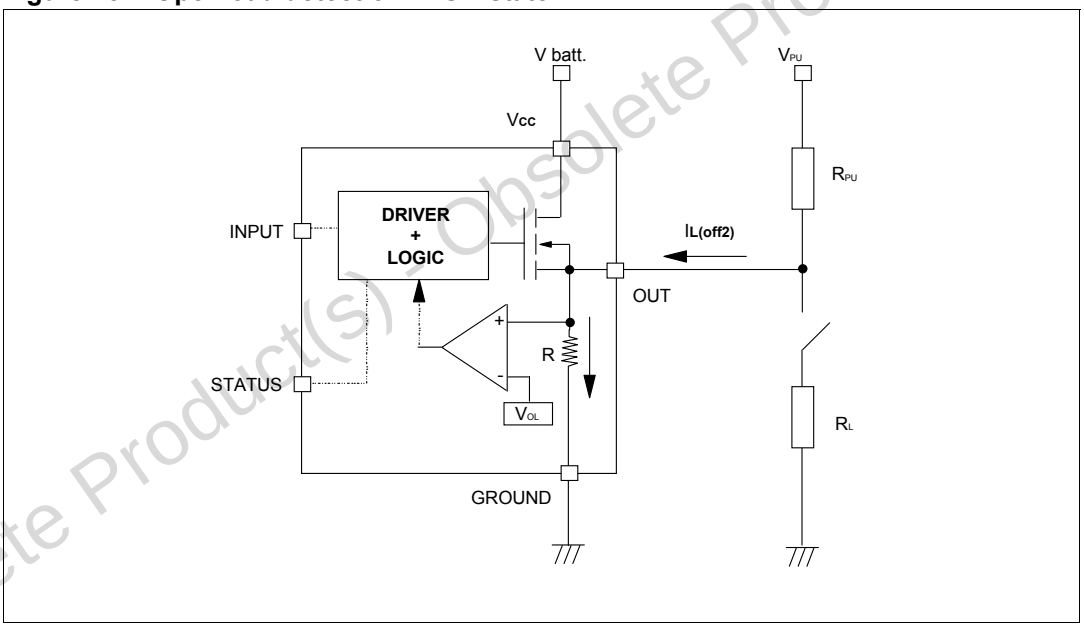

Obsolete Product(s) - Obsolete Product(s)

3.5 Maximum demagnetization energy (V_{CC} = 13.5V)

Figure 26. Maximum turn-off current versus load inductance

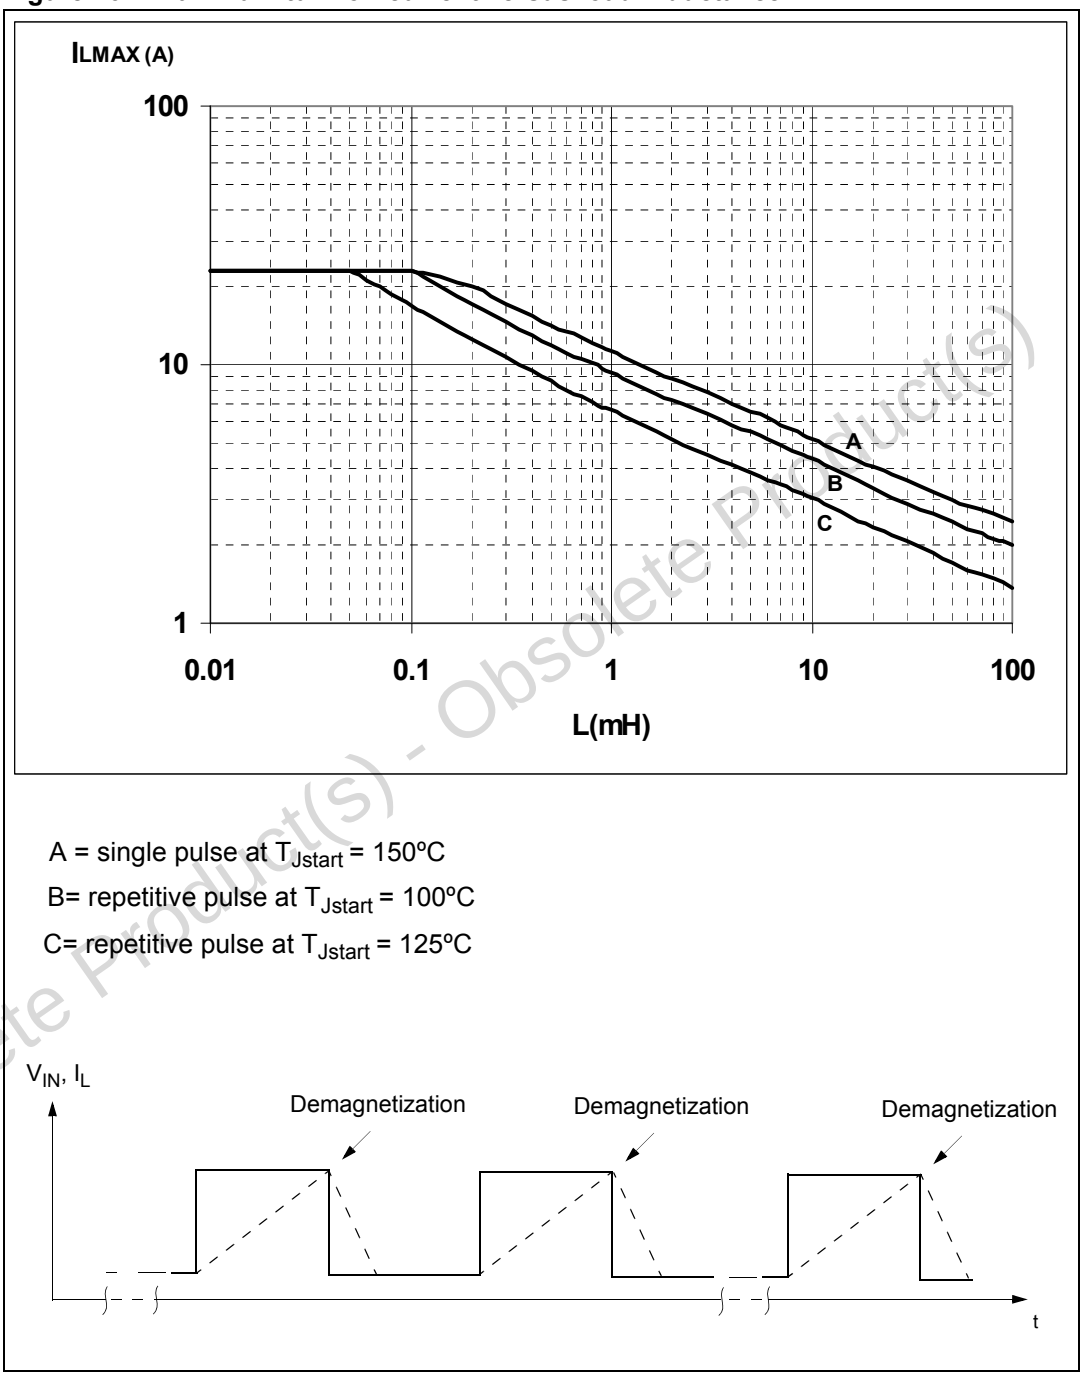

Obsolete Product(s) - Obsolete Product(s)


Note: Values are generated with R_L = 0Ω.

In case of repetitive pulses, T_{jstart} (at beginning of each demagnetization) of every pulse must not exceed the temperature specified above for curves B and C.

4 Package and PC board thermal data


4.1 PowerSSO-24 thermal data

Figure 27. PowerSSO-24 PC board

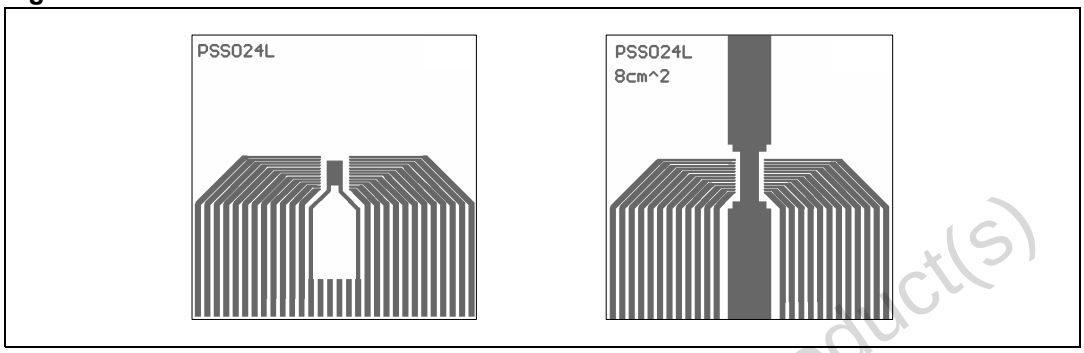

Note: Layout condition of R_{th} and Z_{th} measurements (PCB FR4 area= 78 mm x 78 mm, PCB thickness=2 mm, Cu thickness=70 mm (front and back side), Copper areas: from minimum pad lay-out to 8 cm^2).

Figure 28. $R_{thi\text{-}amb}$ vs. PCB copper area in open box free air condition (one channel ON)

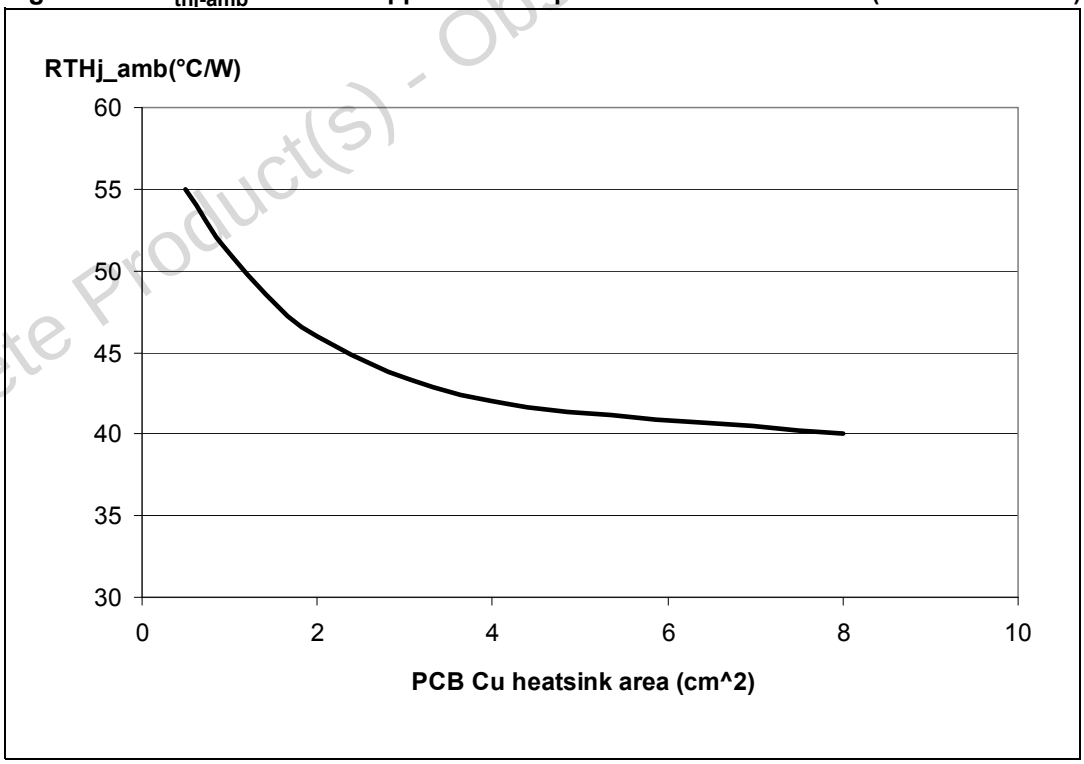

Obsolete Product(s) - Obsolete Product(s)

Figure 29. PowerSSO-24 thermal impedance junction ambient single pulse (one channel ON)


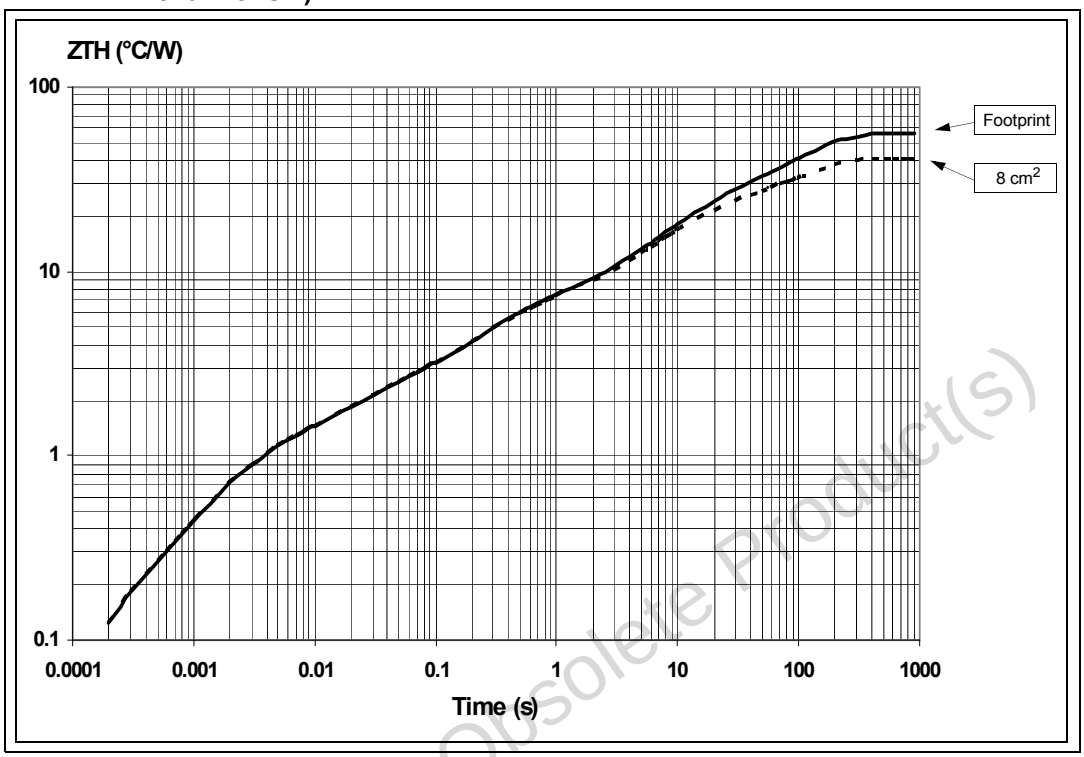


Figure 30. Thermal fitting model of a double channel HSD in PowerSSO-24 (b)

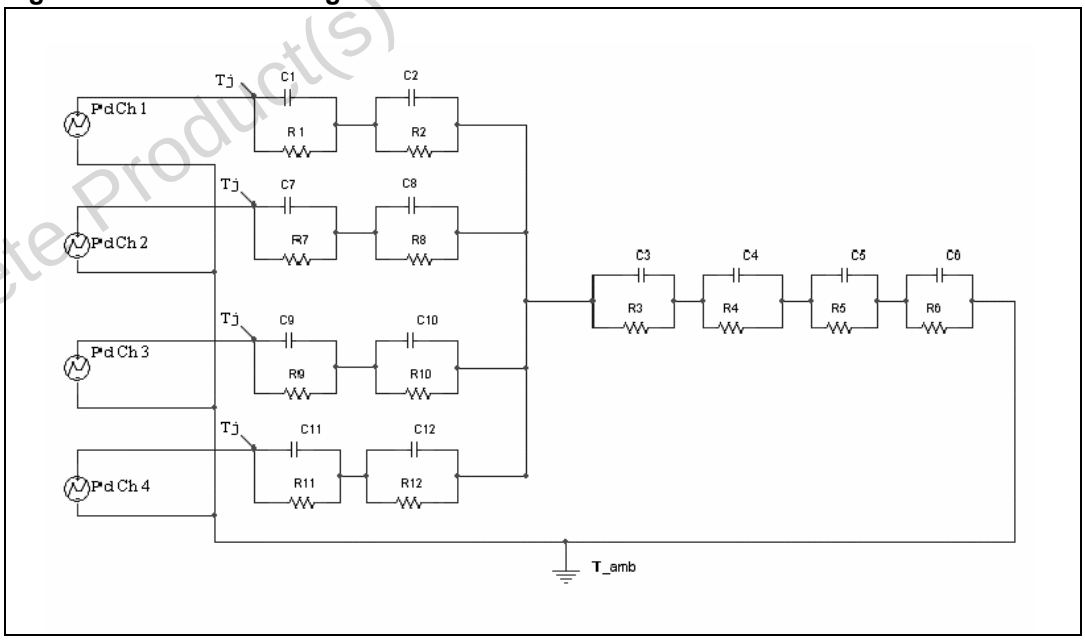

Obsolete Product(s) Obsolete Product(s)

b. The fitting model is a semplified thermal tool and is valid for transient evolutions where the embedded protections (power limitation or thermal cycling during thermal shutdown) are not triggered.

Equation 1: pulse calculation formula

$$Z_{TH\delta} = R_{TH} \cdot \delta + Z_{THtp}(1 - \delta)$$

where $\delta = t_P/T$

Table 16. Thermal parameters

Area/island (cm^2)	Footprint	8
R1 = R7 = R9 = R11 (°C/W)	0.1	
R2 = R8 = R10 = R12 (°C/W)	0.9	
R3 (°C/W)	1	
R4 (°C/W)	4	
R5 (°C/W)	13.5	
R6 (°C/W)	37	22
C1 = C7 = C9 = C11 (W.s/°C)	0.0006	
C2 = C8 = C10 = C12 (W.s/°C)	0.0025	
C3 (W.s/°C)	0.025	
C4 (W.s/°C)	0.08	
C5 (W.s/°C)	0.7	
C6 (W.s/°C)	3	5

Obsolete Product(s) - Obsolete Product(s)

5 Package and packing information


5.1 ECOPACK® packages

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com.

ECOPACK® is an ST trademark.

5.2 PowerSSO-24 mechanical data

Figure 31. PowerSSO-24 package dimensions

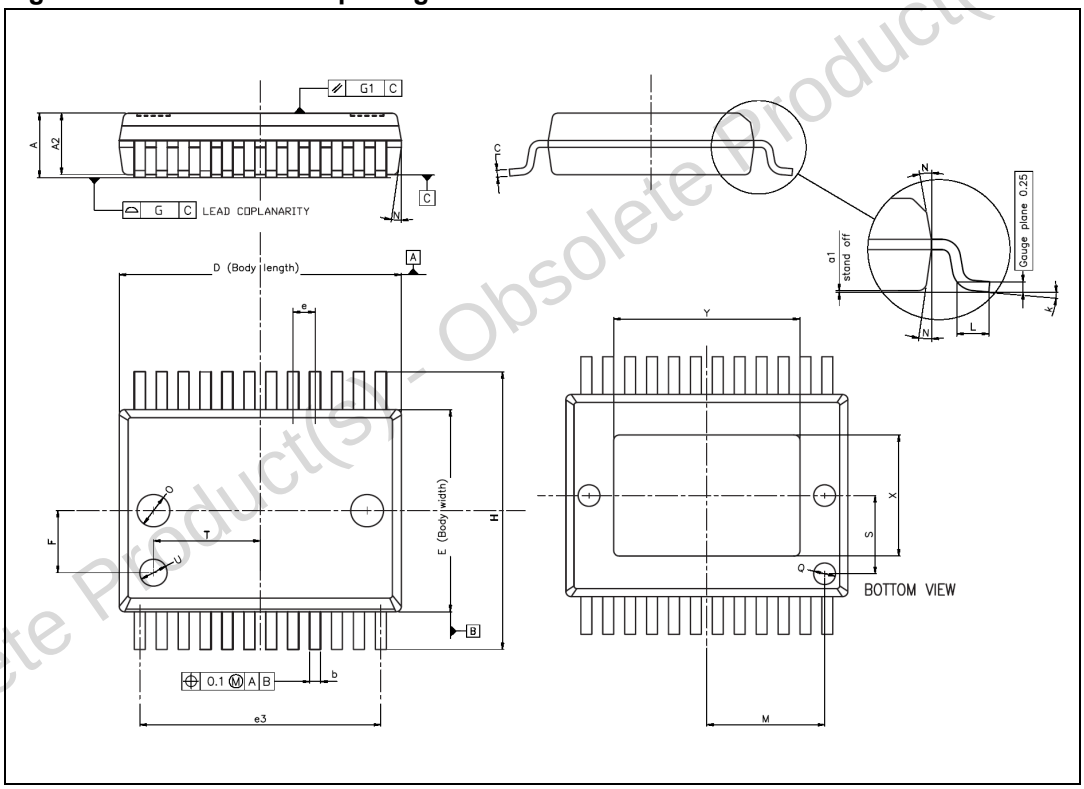

Obsolete Product(s) - Obsolete Product(s)

Table 17. PowerSSO-24 mechanical data(1) (2)


Symbol	Millimeters		
	Min.	Typ.	Max.
A			2.45
A2	2.15		2.35
a1	0		0.10
b	0.33		0.51
c	0.23		0.32
D(3)	10.10		10.50
E(3)	7.40		7.60
e		0.8	
e3		8.8	
F		2.3	
G			0.1
G1			0.06
H	10.1		10.5
h			0.4
k	0°		8°
L	0.55		0.85
O		1.2	
Q		0.8	
S		2.9	
T		3.65	
U		1	
N			10º
X	4.1		4.7
Y	6.5 4.9(4)		7.1 5.5(4)

1. No intrusion allowed inwards the leads.
2. Flash or bleeds on exposed die pad shall not exceed 0.4 mm per side
3. “D and E” do not include mold flash or protusions.
   Mold flash or protusions shall not exceed 0.15 mm.
4. Variations for small window leadframe option.

Obsolete Product(s) Obsolete Product(s)

5.3 Packing information


Figure 32. PowerSSO-24 tube shipment (no suffix)



Base Q.ty	49
Bulk Q.ty	1225
Tube length (± 0.5)	532
A	3.5
B	13.8
C (± 0.1)	0.6

All dimensions are in mm.

Figure 33. PowerSSO-24 tape and reel shipment (suffix "TR")

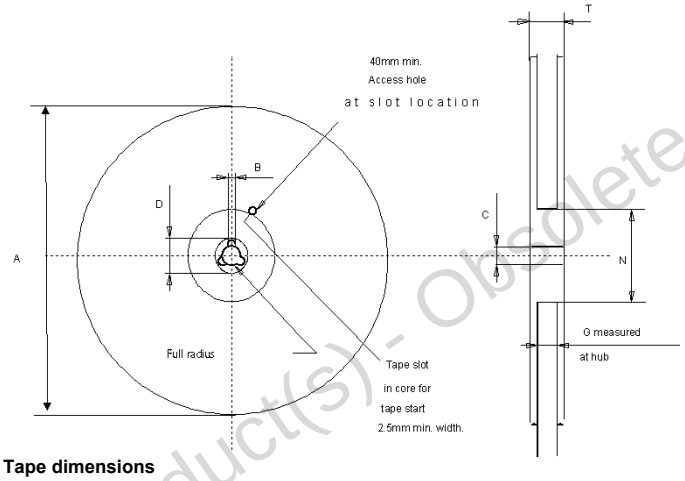


Reel dimensions


Base Q.ty	1000
Bulk Q.ty	1000
A (max)	330
B (min)	1.5
C (± 0.2)	13
F	20.2
G (+ 2 / -0)	24.4
N (min)	100
T (max)	30.4


Tape dimensions
According to Electronic Industries Association (EIA) Standard 481 rev. A, Feb 1986

Tape width	**W**	24
Tape Hole Spacing	**P0 (± 0.1)**	4
Component Spacing	**P**	12
Hole Diameter	**D (± 0.05)**	1.55
Hole Diameter	**D1 (min)**	1.5
Hole Position	**F (± 0.1)**	11.5
Compartment Depth	**K (max)**	2.85
Hole Spacing	**P1 (± 0.1)**	2

All dimensions are in mm.

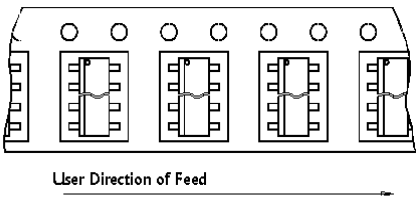

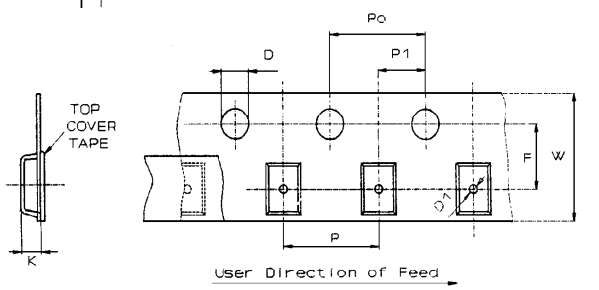

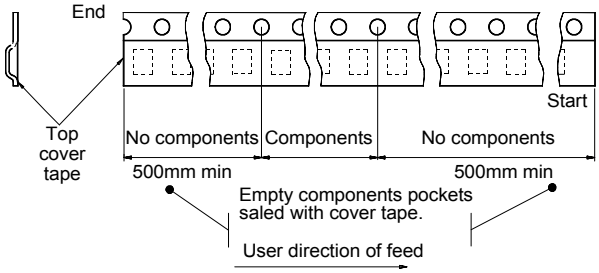

Obsolete Product(s) - Obsolete Product(s)

6 Revision history

Table 18. Document revision history

Date	Revision	Changes
22-Nov-2004	1	Initial release.
07-Dec-2004	2	Electrical characterization curves insertion. PCB copper area correction.
01-Apr-2005	3	Changed document status from preliminary to definitive.
04-May-2005	4	Thermal fitting model parameters correction. Emax insertion. Maximum turn-off current versus load inductance curve insertion.
03-May-2006	5	Configuration diagram modification. Shipment data insertion.
26-Nov-2008	6	Document reformatted and restructured. Added list of contents, tables and figures. Added *ECOPACK® packages* information. Update *PowerSSO-24 mechanical data*.
02-Jul-2009	7	*Table 17: PowerSSO-24 mechanical data*: – Changed A (max) value from 2.50 to 2.45 – Changed A2 (max) value from 2.40 to 2.35 – Updated k values – Changed L (min) value from 0.6 to 0.55 – Changed L (min) value from 1 to 0.88
20-Sep-2013	8	Updated Disclaimer.

Obsolete Product(s) - Obsolete Product(s)

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST’s terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST’S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

ST PRODUCTS ARE NOT DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE ST PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER’S SOLE RISK, EVEN IF ST HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY ST AS BEING INTENDED FOR “AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL” INDUSTRY DOMAINS ACCORDING TO ST PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.
Information in this document supersedes and replaces all information previously supplied.
The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2013 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

Obsolete Product(s) - Obsolete Product(s)