


THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
B	RoHS Compliancy	06-01-06	DP
C	Updated Specifications	10-12-09	LY


MECHANICAL DIMENSIONS:

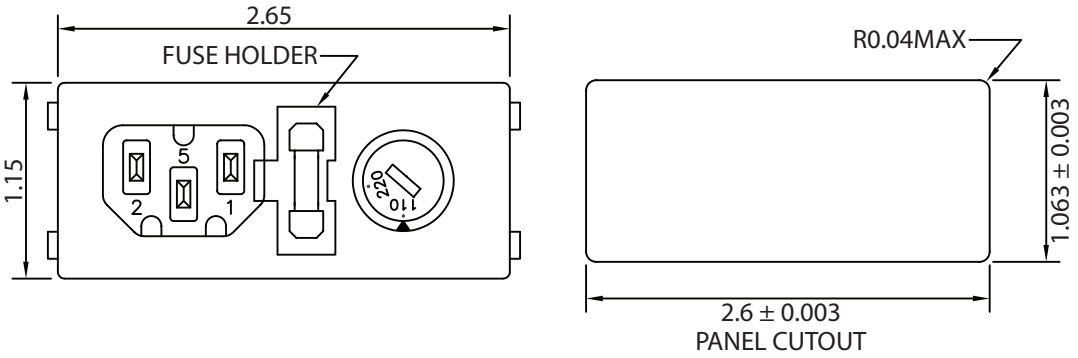

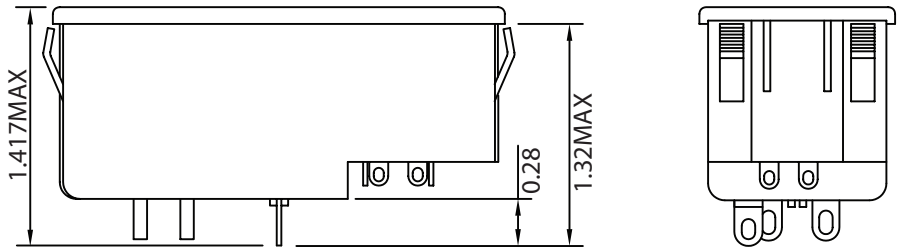

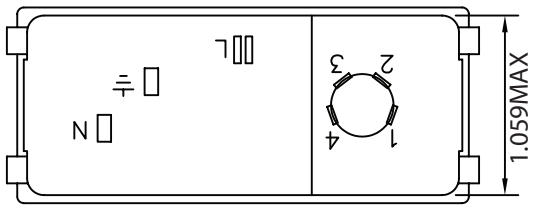

ELECTRICAL SCHEMATIC:

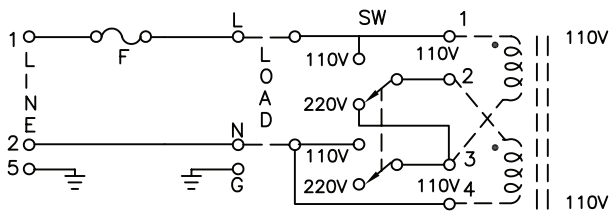

ELECTRICAL CHARACTERISTICS:

1-1. VOLTAGE RATING.....115/250VAC

1-2. CURRENT RATING
- A. @ 115/250VAC (UL, CSA) .....6 A RMS MAX
- B. @ 250VAC (SEMKO) .....4 A RMS MAX

1-3. OPERATING FREQUENCY 48-440Hz

1-4. HIPOT RATING (FOR ONE MINUTE)
- A. LINE TO GROUND .....2000 VDC
- B. LINE TO LINE .....2000 VDC

1-5. MINIMUM INSULATION RESISTANCE: @ 500VDC ONE MINUTE
- A. LINE & NEUTRAL TO GROUND .....10M OHM
- B. LINE & NEUTRAL .....10M OHM

1-6. SAFETY:

1-7. SINGLE 5x20mm FUSEHOLDER

1-8. SNAP-IN PANEL THICKNESS: .04IN~.07IN (1.0mm~1.8mm)

1-9. RoHS COMPLIANT

CONTROLLED

Dim range (mm)	Tolerance +/- (mm)
0-1	0.15
1-6	0.20
6-18	0.30
18-50	0.50
50-120	0.70
120-250	0.90
250-500	1.20

Qualtek Electronics Corp.
PPC DIVISION

Part Number: 761-18/002 RoHS Compliant

Description: MULTI-FUNCTION MODULE

	UNIT: in	REV. C
Drawn / Date	Checked / Date	Approved / Date
S.CHEN 07-27-99	07-27-99	JJH / 07-27-99