www.ti.com


SLOS485-JANUARY 2006

FEATURES

- 5-MHz Gain Bandwidth Product
- 5-V/μs Slew Rate
- Low Noise: 20 nV/√Hz
- 1.22-mA/Channel Supply Current
- V_{OS} < 3 mV Max
- Low Supply Voltage: 2.7 V to 5 V
- Rail-to-Rail Inputs and Outputs
- Unity Gain Stable
- 1.5-μA Shutdown I_{CC}
- 2.2-μs Turn On

APPLICATIONS

- Power-Amplifier Control Loops
- Cellular Phones
- Portable Equipment
- Wireless LANs
- Radio Systems
- Cordless Phones

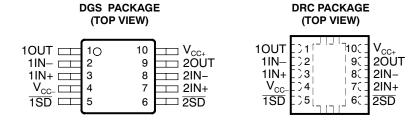

DESCRIPTION/ORDERING INFORMATION

The LMV712 dual operational amplifier is a high-performance BiCMOS operational amplifier intended for applications requiring rail-to-rail inputs, combined with speed and low noise. The device offers a bandwidth of 5 MHz, a slew rate of 5 V/μ s, and operates with capacitive loads of up to 200 pF without oscillation.

The LMV712 offers two independent shutdown ($\overline{1SD}$, $\overline{2SD}$) pins. This feature allows disabling of each device separately and reduces the supply current to less than 1 μ A typical. The output voltage rapidly and smoothly ramps up with no glitch as the amplifier comes out of the shutdown mode.

The LMV712 is offered in the space-saving SON (DRC) package and in an MSOP (DGS) package. These packages are designed to meet the demands of small size, low power, and low cost required by cellular phones and similar battery-operated portable electronics.

ORDERING INFORMATION

| T _A | PACK | AGE ⁽¹⁾ | ORDERABLE PART NUMBER | TOP-SIDE MARKING |
|----------------|------------|--------------------|-----------------------|------------------|
| | MSOP – DGS | Reel of 2500 | LMV712IDGSR | RNB |
| _40°C to 85°C | MSOP - DGS | Reel of 250 | LMV712IDGST | HIND |
| -40 C to 85 C | CON DDC | Reel of 3000 | LMV712IDRCR | PREVIEW |
| | SON – DRC | Reel of 250 | LMV712IDRCT | FNEVIEW |

(1) Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.






SYMBOL (EACH AMPLIFIER)



SIMPLIFIED SCHEMATIC (EACH AMPLIFIER)

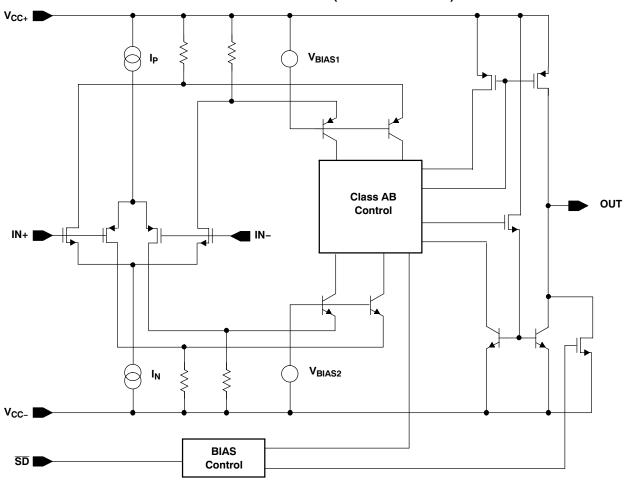



SLOS485-JANUARY 2006

Absolute Maximum Ratings(1)

over operating free-air temperature range (unless otherwise noted)

| | | | MIN | MAX | UNIT |
|---------------------|--|-----------------------|------------------------|-----------------|------|
| $V_{CC+} - V_{CC-}$ | Supply voltage (2) | | | 5.5 | V |
| V _{ID} | Differential input voltage (3) | | ±Supply voltage | V | |
| VI | Input voltage range (any input) | | V _{CC} 0.4 | $V_{CC+} + 0.4$ | V |
| Vo | Output voltage range | V _{CC} - 0.4 | V _{CC+} + 0.4 | V | |
| I | Input current ⁽⁴⁾ | | ±10 | mA | |
| Io | Output current | | | ±50 | mA |
| 0 | Dealers thermal impedance (5) (6) | DGS package | | 165 | °C/W |
| θ_{JA} | Package thermal impedance (5) (6) | DRC package | | TBD | C/VV |
| TJ | Operating virtual junction temperature | | | 150 | °C |
| T _{stg} | Storage temperature range | | -65 | 150 | °C |

- (1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values (except differential voltages and V_{CC} specified for the measurement of I_{OS}) are with respect to the network GND.
- (3) Differential voltages are at IN+ with respect to IN-.
- (4) Excessive input current will flow if a differential input voltage in excess of approximately 0.6 V is applied between the inputs, unless some limiting resistance is used.
- (5) Maximum power dissipation is a function of $T_J(max)$, θ_{JA} , and T_A . The maximum allowable power dissipation at any allowable ambient temperature is $P_D = (T_J(max) T_A)/\theta_{JA}$. Operating at the absolute maximum T_J of 150°C can affect reliability.
- (6) The package thermal impedance is calculated in accordance with JESD 51-7.

ESD Protection

| | TYP | UNIT |
|------------------|------|------|
| Human-Body Model | 1500 | V |
| Machine Model | 150 | V |

Recommended Operating Conditions

| | | MIN | MAX | UNIT |
|---------------------|--------------------------------|-----|-----|------|
| $V_{CC+} - V_{CC-}$ | Supply voltage | 2.7 | 5 | V |
| T _A | Operating free-air temperature | -40 | 85 | °C |

LMV712

LOW-POWER LOW-NOISE HIGH-OUTPUT RRIO DUAL OPERATIONAL AMPLIFIER WITH INDEPENDENT SHUTDOWN



SLOS485-JANUARY 2006

Electrical Characteristics

 $\rm V_{CC_{+}}$ = 2.7 V, $\rm V_{CC_{-}}$ = GND, $\rm V_{CM}$ = 1.35 V, and $\rm R_{L}$ > 1 $\rm M\Omega$ (unless otherwise noted)

| | PARAMETER | TEST COND | DITIONS | T _A | MIN | TYP | MAX | UNIT |
|--------------------------------------|--|---|--------------------------|----------------|------------|----------|------|--------|
| V _{IO} | Input offset voltage | V _{CM} = 0.85 V and 1.85 | V | 25°C | | 0.4 | 3 | mV |
| V 10 | Input onset voltage | VCM = 0.03 V and 1.03 | | -40°C to 85°C | | | 3.2 | 1117 |
| I _{IB} | Input bias current | | | 25°C | | 5.5 | 115 | pА |
| 'IB | input bias current | | | –40°C to 85°C | | | 130 | PA |
| CMRR | Common-mode | 0 ≤ V _{CM} ≤ 2.7 V | | 25°C | 50 | 75 | | dB |
| OWNTH | rejection ratio | 0 2 VCM 2 2.1 V | | –40°C to 85°C | 45 | | | ub. |
| | | | V _{CM} = 0.85 V | 25°C | 70 | 90 | | |
| PSRR | Power-supply | $2.7 \text{ V} \le \text{V}_{\text{CC+}} \le 5 \text{ V}$ | VCM = 0.00 | -40°C to 85°C | 68 | | | dB |
| Ortit | rejection ratio | 7.7 V 3 VCC+ 3 3 V | V _{CM} = 1.85 V | 25°C | 70 | 90 | | u u u |
| | | | v _{CM} = 1.85 v | –40°C to 85°C | 68 | | | |
| CMVR | Common-mode | CMRR ≥ 50 dB | | 25°C | | -0.3 | -0.2 | V |
| | voltage range | | | 25 0 | 2.9 | 3 | | V |
| | | Causaina V 0 | | 25°C | 15 | 25 | | |
| | Output | Sourcing V _O = 0 | | -40°C to 85°C | 12 | | | |
| short-circuit current ⁽¹⁾ | | 2 | | 25°C | 25 | 50 | | mA |
| | | Sinking V _O = 2.7 V | | -40°C to 85°C | 22 | | | |
| | | | 1 | 25°C | 2.62 | 2.68 | | |
| | | | V _{OH} | -40°C to 85°C | 2.6 | | | |
| | | $R_L = 10 \text{ k}\Omega \text{ to } 1.35 \text{ V}$ | | 25°C | | 0.01 | 0.12 | |
| | | | V _{OL} | -40°C to 85°C | | | 0.15 | |
| √ _O | Output voltage swing | | | 25°C | 2.52 | 2.55 | | V |
| | | | V _{OH} | -40°C to 85°C | 2.5 | | | |
| | | $R_L = 600 \Omega \text{ to } 1.35 \text{ V}$ | | 25°C | | 0.05 | 0.23 | † |
| | | | V _{OL} | -40°C to 85°C | | | 0.3 | |
| V _{O(SD)} | Output voltage level in shutdown mode | | | 25°C | | 10 | 200 | mV |
| | | ON mode | | 25°C | | 1.22 | 1.7 | mA |
| ı | Supply current | ON mode | | –40°C to 85°C | | | 1.9 | |
| I _{CC} | per channel | Chutdown modo | | 25°C | | 0.12 | 1.5 | |
| | | Shutdown mode | | -40°C to 85°C | | | 2 | μΑ |
| | | Sourcing $R_L = 10 \text{ k}\Omega$, | | 25°C | 80 | 115 | | |
| | | $V_0 = 1.35 \text{V} \text{ to } 2.3 \text{V}$ | | -40°C to 85°C | 76 | | | |
| | | Sinking $R_L = 10 \text{ k}\Omega$, | | 25°C | 80 | 113 | | |
| | Large-signal | $V_0 = 0.4 \text{ V} \text{ to } 1.35 \text{ V}$ | | -40°C to 85°C | 76 | | | |
| A _{VOL} | voltage gain | Sourcing $R_L = 600 \Omega$, | | 25°C | 80 | 97 | | dB |
| | | V _O = 1.35 V to 2.2 V | | -40°C to 85°C | 76 | | | |
| | | Sinking $R_L = 600 \Omega$, | | 25°C | 80 | 100 | | |
| | | $V_0 = 0.5 \text{ V to } 1.35 \text{ V}$ | | -40°C to 85°C | 76 | | | |
| | | ON mode | | | 2.4 to 2.7 | 2 to 2.7 | | |
| V_{SD} | Shutdown pin voltage | Shutdown mode | | 25°C | 0 to 0.8 | 0 to 1 | | V |
| GBWP | Gain bandwidth product | | | 25°C | | 5 | | MHz |
| SR ⁽²⁾ | Slew rate | | | 25°C | | 5 | | V/μs |
| Φ_{m} | Phase margin | | | 25°C | | 60 | | 0 |
| V _n | Input referred voltage noise | f = 1 kHz | | 25°C | | 20 | | nV/√H: |

Shorting the output to either supply rail adversely affects reliability. Number specified is the slower of the positive and negative slew rates. (2)





SLOS485-JANUARY 2006

Electrical Characteristics (continued)

 $\rm V_{CC_{+}}$ = 2.7 V, $\rm V_{CC_{-}}$ = GND, $\rm V_{CM}$ = 1.35 V, and $\rm R_{L}$ > 1 $\rm M\Omega$ (unless otherwise noted)

| | PARAMETER | TEST CONDITIONS | T _A | MIN | TYP | MAX | UNIT |
|--------|-------------------|-----------------|----------------|-----|-----|-----|------|
| _ | Turn-on time from | | 25°C | | 2.2 | 4 | |
| I (on) | shutdown | | 25 C | | | 4.6 | μS |

LMV712

LOW-POWER LOW-NOISE HIGH-OUTPUT RRIO DUAL OPERATIONAL AMPLIFIER WITH INDEPENDENT SHUTDOWN



SLOS485-JANUARY 2006

Electrical Characteristics

 $\rm V_{CC_{+}}$ = 5 V, $\rm V_{CC_{-}}$ = GND, $\rm V_{CM}$ = 2.5 V, and $\rm R_{L}$ > 1 $\rm M\Omega$ (unless otherwise noted)

| | PARAMETER | TEST CON | DITIONS | TA | MIN | TYP | MAX | UNIT | |
|--------------------|---------------------------------------|--|--------------------------|---------------|----------|----------|------|--------|--|
| V _{IO} | Input offset voltage | V _{CM} = 0.85 V and 1.8 | | 25°C | | 0.4 | 3 | mV | |
| V 10 | input onset voltage | VCM = 0.05 V and 1.0 | | –40°C to 85°C | | | 3.2 | IIIV | |
| l | Input bias current | | | 25°C | | 5.5 | 115 | pA | |
| I _{IB} | input bias current | | | –40°C to 85°C | | | 130 | pΑ | |
| CMRR | Common-mode | 0 ≤ V _{CM} ≤ 5 V | | 25°C | 50 | 80 | | dB | |
| OWIT II 1 | rejection ratio | 0 2 ACW 2 2 A | | -40°C to 85°C | 45 | | | QD | |
| | | | V _{CM} = 0.85 V | 25°C | 70 | 90 | | | |
| PSRR | Power-supply | 2.7 V ≤ V _{CC+} ≤ 5 V | VCM = 0.03 V | -40°C to 85°C | 68 | | | dB | |
| Orar | rejection ratio | 2.7 V 3 V CC+ 3 3 V | V _{CM} = 1.85 V | 25°C | 70 | 90 | | uБ | |
| | | | VCM = 1.05 V | -40°C to 85°C | 68 | | | | |
| CMVR | Common-mode | CMRR ≥ 50 dB | 25°C | | -0.3 | -0.2 | V | | |
| CIVIVIT | voltage range | | | 25 0 | 5.2 | 5.3 | | v | |
| | | Sourcing V _O = 0 | | 25°C | 20 | 35 | | | |
| | Output | Sourcing V _O = 0 | | –40°C to 85°C | 18 | | | m A | |
| I _{SC} | short-circuit current (1) | Sinking V E V | | 25°C | 25 | 50 | | mA | |
| | | Sinking V _O = 5 V | | –40°C to 85°C | 21 | | | | |
| | | | V | 25°C | 4.92 | 4.98 | | | |
| | | D 40 k0 to 0 5 V | V _{OH} | -40°C to 85°C | 4.9 | | | | |
| | | $R_L = 10 \text{ k}\Omega \text{ to } 2.5 \text{ V}$ | V | 25°C | | 0.01 | 0.12 | | |
| V | Output voltage ewing | | V _{OL} | –40°C to 85°C | | | 0.15 | V | |
| V _O | Output voltage swing | | | 25°C | 4.82 | 4.85 | | | |
| | | D 000 0 to 0.5 V | V _{OH} | -40°C to 85°C | 4.8 | | | | |
| | | $R_L = 600 \Omega \text{ to } 2.5 \text{ V}$ | | 25°C | | 0.05 | 0.23 | | |
| | | | V _{OL} | -40°C to 85°C | | | 0.3 | | |
| V _{O(SD)} | Output voltage level in shutdown mode | | | 25°C | | 10 | 200 | mV | |
| | | ON made | | 25°C | | 1.17 | 1.7 | mA | |
| | Supply current | ON mode | | –40°C to 85°C | | | 1.9 | | |
| I _{CC} | per channel | Chutdown made | | 25°C | | 0.12 | 1.5 | | |
| | | Shutdown mode | | -40°C to 85°C | | | 2 | μΑ | |
| | | Sourcing $R_L = 10 \text{ k}\Omega$, | | 25°C | 80 | 130 | | | |
| | | $V_0 = 2.5 \text{ V to } 4.6 \text{ V}$ | | –40°C to 85°C | 76 | | | | |
| | | Sinking $R_L = 10 \text{ k}\Omega$, | | 25°C | 80 | 130 | | | |
| ^ | Large-signal | $V_0 = 0.4 \text{ V to } 2.5 \text{ V}$ | | -40°C to 85°C | 76 | | | ٩D | |
| A _{VOL} | voltage gain | Sourcing R _L = 600 Ω, | | 25°C | 80 | 110 | | dB | |
| | | V _O = 2.5 V to 4.6 V | | -40°C to 85°C | 76 | | | | |
| | | Sinking $R_L = 600 \Omega$, | | 25°C | 80 | 107 | | | |
| | | $V_0 = 0.4 \text{ V} \text{ to } 2.5 \text{ V}$ | | -40°C to 85°C | 76 | | | 1 | |
| | Ob tale a discollege | ON mode | | 0500 | 4.5 to 5 | 3.5 to 5 | | | |
| V_{SD} | Shutdown pin voltage | Shutdown mode | | 25°C | 0 to 0.8 | 0 to 1.5 | | V | |
| GBWP | Gain bandwidth product | | | 25°C | | 5 | | MHz | |
| SR (2) | Slew rate | | | 25°C | | 5 | | V/μs | |
| Φ_{m} | Phase margin | | | 25°C | , | 60 | | ٥ | |
| V _n | Input referred voltage noise | f = 1 kHz | | 25°C | | 20 | | nV/√Hz | |

Shorting the output to either supply rail adversely affects reliability. Number specified is the slower of the positive and negative slew rates.

⁽²⁾






SLOS485-JANUARY 2006

Electrical Characteristics (continued)

 $\rm V_{CC_{+}}$ = 5 V, $\rm V_{CC_{-}}$ = GND, $\rm V_{CM}$ = 2.5 V, and $\rm R_{L}$ > 1 $\rm M\Omega$ (unless otherwise noted)

| | PARAMETER | TEST CONDITIONS | T _A | MIN | TYP | MAX | UNIT |
|--------|---------------|-----------------|----------------|-----|-----|-----|------|
| _ | Turn-on time | | 25°C | | 1.6 | 4 | |
| I (on) | from shutdown | | 25 C | | | 4.6 | μS |





TYPICAL CHARACTERISTICS

GRAPH PREVIEWS

Supply Current per Channel vs Supply Voltage (ON Mode)

Supply Current per Channel vs Supply Voltage (Shutdown Mode)

Input Offset Voltage vs Common-Mode Voltage

Bias Current vs Common-Mode Voltage Over Temperature

Output Positive Swing vs Supply Voltage ($R_1 = 600 \Omega$)

Output Negative Swing vs Supply Voltage ($R_1 = 600 \Omega$)

Sourcing Current vs Output Voltage (V_{CC} = 2.7 V)

Sourcing Current vs Output Voltage (V_{CC} = 5 V)

Sinking Current vs Output Voltage (V_{CC} = 2.7 V)

Sinking Current vs Output Voltage (V_{CC} = 5 V)

PSRR vs Frequency (V_{CC} = 2.7 V)

PSRR vs Frequency (V_{CC} = 5 V)

CMRR vs Frequency (V_{CC} = 2.7 V)

CMRR vs Frequency ($V_{CC} = 5 \text{ V}$)

Open-Loop Frequency Response vs R_L (V_{CC+} = 2.7 V)

Open-Loop Frequency Response vs R_L ($V_{CC_{\pm}} = 5 \text{ V}$)

Open-Loop Frequency Response vs C_1 ($V_{CC+} = 2.7 \text{ V}$)

Open-Loop Frequency Response vs C_L ($V_{CC_{\pm}} = 5 \text{ V}$)

Voltage Noise vs Frequency ($V_{CC} = 2.7 \text{ V}$)

Voltage Noise vs Frequency (V_{CC} = 5 V)

Non-Inverting Large Signal Pulse Response (V_{CC} = 2.7 V)

Non-Inverting Large Signal Pulse Response (V_{CC} = 5 V)

Non-Inverting Small Signal Pulse Response (V_{CC} = 2.7 V)

Non-Inverting Small Signal Pulse Response (V_{CC} = 5 V)

Inverting Large Signal Pulse Response (V_{CC} = 2.7 V)

Inverting Large Signal Pulse Response (V_{CC} = 5 V)

Inverting Small Signal Pulse Response (V_{CC} = 2.7 V)

Inverting Small Signal Pulse Response (V_{CC} = 5 V)

Turn-On Response Time ($V_{CC} = 5 \text{ V}$)

Input Common-Mode Capacitance vs Common-Mode Voltage (V_{CC} = 5 V)





9-.lun-2012

PACKAGING INFORMATION

| Orderable Device | Status (1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan ⁽²⁾ | Lead/ Ball Finish | MSL Peak Temp ⁽³⁾ | Samples (Requires Login) |
|------------------|------------|--------------|--------------------|------|-------------|----------------------------|----------------------|------------------------------|-----------------------------|
| LMV712IDGSR | ACTIVE | MSOP | DGS | 10 | 2500 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | |
| LMV712IDGSRG4 | ACTIVE | MSOP | DGS | 10 | 2500 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | |
| LMV712IDGST | ACTIVE | MSOP | DGS | 10 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | |
| LMV712IDGSTG4 | ACTIVE | MSOP | DGS | 10 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | |

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes. **Pb-Free** (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

PACKAGE MATERIALS INFORMATION

www.ti.com 3-Nov-2010

TAPE AND REEL INFORMATION





| | Dimension designed to accommodate the component width |
|----|---|
| В0 | Dimension designed to accommodate the component length |
| K0 | Dimension designed to accommodate the component thickness |
| W | Overall width of the carrier tape |
| P1 | Pitch between successive cavity centers |

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

| Device | Package Type | Package Drawing | | | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------|-----------------|--------------------|----|------|--------------------------|--------------------------|------------|------------|------------|------------|-----------|------------------|
| LMV712IDGSR | MSOP | DGS | 10 | 2500 | 330.0 | 12.4 | 5.3 | 3.3 | 1.3 | 8.0 | 12.0 | Q1 |

www.ti.com 3-Nov-2010



*All dimensions are nominal

| Device | Device Package Type | | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) | |
|-------------|---------------------|-----|------|------|-------------|------------|-------------|--|
| LMV712IDGSR | MSOP | DGS | 10 | 2500 | 370.0 | 355.0 | 55.0 | |

DGS (S-PDSO-G10)

PLASTIC SMALL-OUTLINE PACKAGE



NOTES:

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion.
- D. Falls within JEDEC MO-187 variation BA.



IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

Applications

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Wireless Connectivity

Audio www.ti.com/audio Automotive and Transportation www.ti.com/automotive **Amplifiers** amplifier.ti.com Communications and Telecom www.ti.com/communications dataconverter.ti.com Computers and Peripherals www.ti.com/computers **Data Converters DLP® Products** www.dlp.com Consumer Electronics www.ti.com/consumer-apps DSP dsp.ti.com **Energy and Lighting** www.ti.com/energy Clocks and Timers www.ti.com/clocks Industrial www.ti.com/industrial Interface interface.ti.com Medical www.ti.com/medical Logic logic.ti.com Security www.ti.com/security Power Mgmt www.ti.com/space-avionics-defense power.ti.com Space, Avionics and Defense Microcontrollers Video and Imaging microcontroller.ti.com www.ti.com/video www.ti-rfid.com **OMAP Mobile Processors**

TI E2E Community Home Page

www.ti.com/omap

www.ti.com/wirelessconnectivity

e2e.ti.com