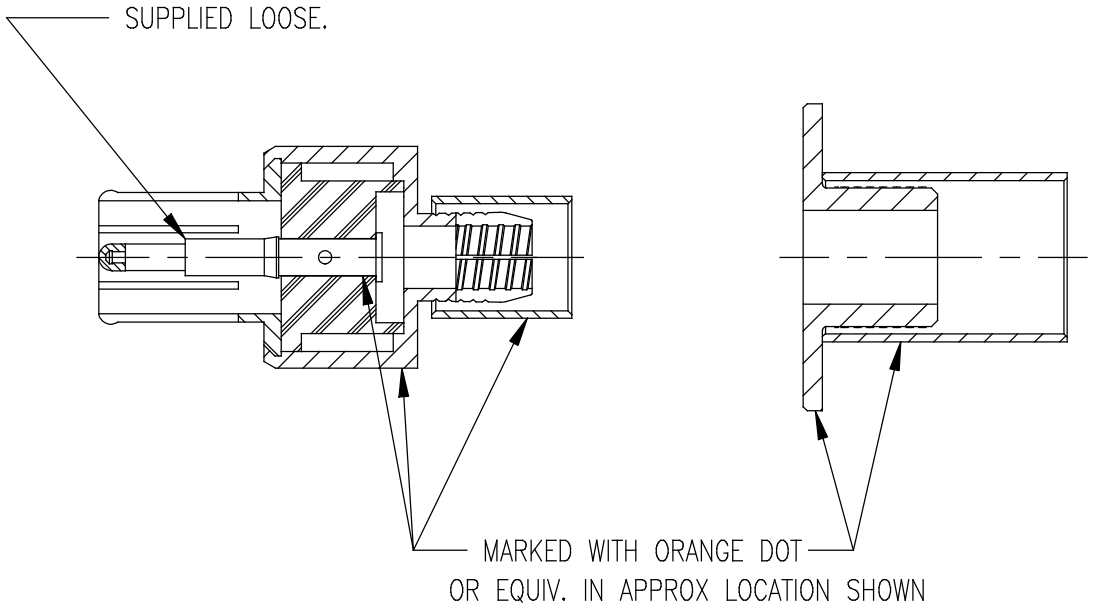



NOTES:

1. FOR USE WITH 740 CABLE GROUP (BELDEN 9232, MOHAWK M52479, GEPCO LVT61811 & COMMSCOPE 7825, 7826 CABLE).
2. FOR CABLING INSTRUCTIONS SEE 3-651.
3. USE CRIMPING TOOL KTH-1000 AND TWO SEPARATE DIES KTH-2041 AND KTH-2248 OR KTH-8000 AND DIE KTH-8002.
4. MATERIALS:
   OUTER CONTACT: BER. COPPER, ASTM-B-196.
   INSULATOR: TEFLON, ASTM-D-4894
   K-GRIP SLEEVES: COM BRONZE, ASTM-B-135
   CENTER CONTACT TIP: DELRIN
   ALL OTHER METAL PARTS: BRASS, ASTM-B16
5. FINISHES:
   CENTER CONTACT: HARD GOLD PLATE, PER MIL-G-45204
   ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
6. ELECTRICAL CHARACTERISTICS:
   NOMINAL IMPEDANCE: 75 OHMS
   FREQUENCY RANGE: DC-1 GHz

SD

SD

7708-14

| ISSUE | REVISIONS CHANGES |
|---|---|
| 0 | ER 37375<br>KH 09/08/97 |
| 1 | CN 38321 E<br>HVN 06/01/01 |

SCALE 2:1

APPROX SURFACE AREA

USED ON —

REF:

RETRO-FIT ASSY

| | |
|---|---|
| DRAWN PG | DATE 04/30/97 |
| DESIGN LI | DATE 05/05/97 |
| APPR. FDH | DATE 09/08/97 |

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

7708-14