

# SP3T SWITCH WITH IMPEDANCE DETECTION MICRO-USB SWITCH TO SUPPORT USB, UART, AUDIO, AND CHARGER

Check for Samples: [TS5USBA43402](#)

## FEATURES


- Compatible Accessories
  - USB Data Cable
  - UART Cable
  - Charger (Dedicated Charger or Host/Hub Charger)
  - Stereo Headset With Mic
- Integrated LDOs for  $V_{REF}$  and Mic Bias
- USB Path Supports USB 2.0 High Speed
- Audio Path Provides Negative Rail Support and Click/Pop Reduction
- Supports Factory Test Mode
- 1.8-V Compatible I<sup>2</sup>C Interface
- ESD Performance Tested Per JESD 22
  - 2000-V Human-Body Model (A114-B, Class II)
  - 1000-V Charged-Device Model (C101)

- ESD Performance DP/DM/ID/ $V_{BUS}$  to GND
  - $\pm 8$ -kV Contact Discharge (IEC 61000-4-2)
  - $\pm 15$ -kV Air Gap Discharge (IEC 61000-4-2)

## APPLICATIONS

- Cellular Telephones

YZP PACKAGE  
(LASER SCRIBE VIEW)



PIN ASSIGNMENTS

|   | A     | B                       | C       | D       | E         |
|---|-------|-------------------------|---------|---------|-----------|
| 4 | MIC   | ISSET                   | UART_TX | USB_DM  | USB_DP    |
| 3 | R2.2K | $\overline{\text{INT}}$ | UART_RX | ID      | DP        |
| 2 | SDA   | SCL                     | DSS     | GND     | DM        |
| 1 | CLDO  | $V_{SUPPLY}$            | AUDIO_R | AUDIO_L | $V_{BUS}$ |

## DESCRIPTION

The TS5USBA43402 is designed to interface the cellphone UART, USB, and audio chips with external peripherals via a micro-USB connector. The switch features impedance detection for identification of various accessories that are attached through DP and DM of the micro-USB port. When an accessory is plugged into the micro-USB port, the switch uses a detection mechanism to identify the accessory (see [State Machine](#) for details). It will then switch to the appropriate channel—data, audio, or UART.

The TS5USBA43402 has an I<sup>2</sup>C interface for communication with the cellphone baseband or applications processor. An interrupt is generated when anything plugged into the micro-USB is detected. Another interrupt is generated when the device is unplugged.

**Table 1. ORDERING INFORMATION**

| $T_A$         | PACKAGE <sup>(1)</sup> <sup>(2)</sup> |               | ORDERABLE PART NUMBER | TOP-SIDE MARKING |
|---------------|---------------------------------------|---------------|-----------------------|------------------|
| –40°C to 85°C | WSCP – YZP<br>(0.5-mm pitch)          | Tape and reel | TS5USBA43402YZPR      | 5F2              |

(1) Package drawings, thermal data, and symbolization are available at [www.ti.com/packaging](http://www.ti.com/packaging).

(2) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI Web site at [www.ti.com](http://www.ti.com).




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

### Table 2. SUMMARY OF CHARACTERISTICS


$$T_A = 25^\circ\text{C}$$

|                                                 | USB PATH                  | UART PATH   | AUDIO PATH   | MIC PATH     |
|-------------------------------------------------|---------------------------|-------------|--------------|--------------|
| Number of switches                              | 2                         | 2           | 2            | 1            |
| ON-state resistance ( $r_{ON}$ )                | 5 $\Omega$                | 37 $\Omega$ | 3 $\Omega$   | 8.8 $\Omega$ |
| ON-state resistance match ( $\Delta r_{ON}$ )   | 1 $\Omega$                | 3 $\Omega$  | 1.1 $\Omega$ | N/A          |
| ON-state resistance flatness ( $r_{ON(flat)}$ ) | 0.24 $\Omega$             | 14 $\Omega$ | 0.1 $\Omega$ | 0.5 $\Omega$ |
| Turn-on/turn-off time ( $t_{ON}/t_{OFF}$ )      | 1 ms                      | 1 ms        | 1 ms         | 1 ms         |
| Bandwidth (BW)                                  | >720 MHz                  | >300 MHz    | >900 MHz     | >67 MHz      |
| OFF isolation ( $O_{ISO}$ )                     | -22 dB                    | -40 dB      | -75 dB       | -100 dB      |
| Crosstalk ( $X_{TALK}$ )                        | -40 dB                    | -40 dB      | -50 dB       | -50 dB       |
| Total harmonic distortion (THD)                 | N/A                       | N/A         | 0.05%        | 0.0017%      |
| Leakage current ( $I_{NO(OFF)}/I_{NC(OFF)}$ )   | 100 nA                    | 100 nA      | 100 nA       | 100 nA       |
| Package options                                 | YZP package, 0.5-mm pitch |             |              |              |

### BLOCK DIAGRAM

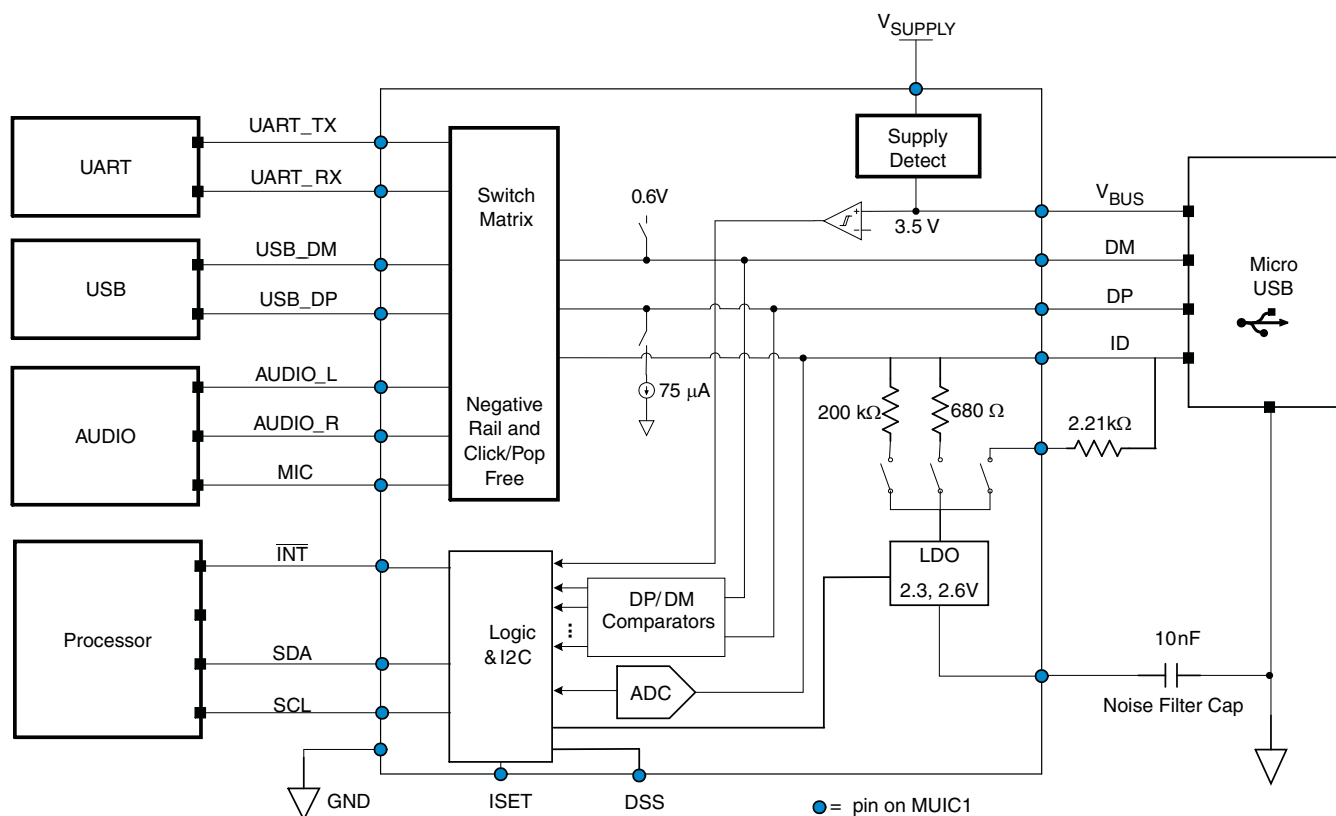

### SWITCH MATRIX BLOCK DIAGRAM

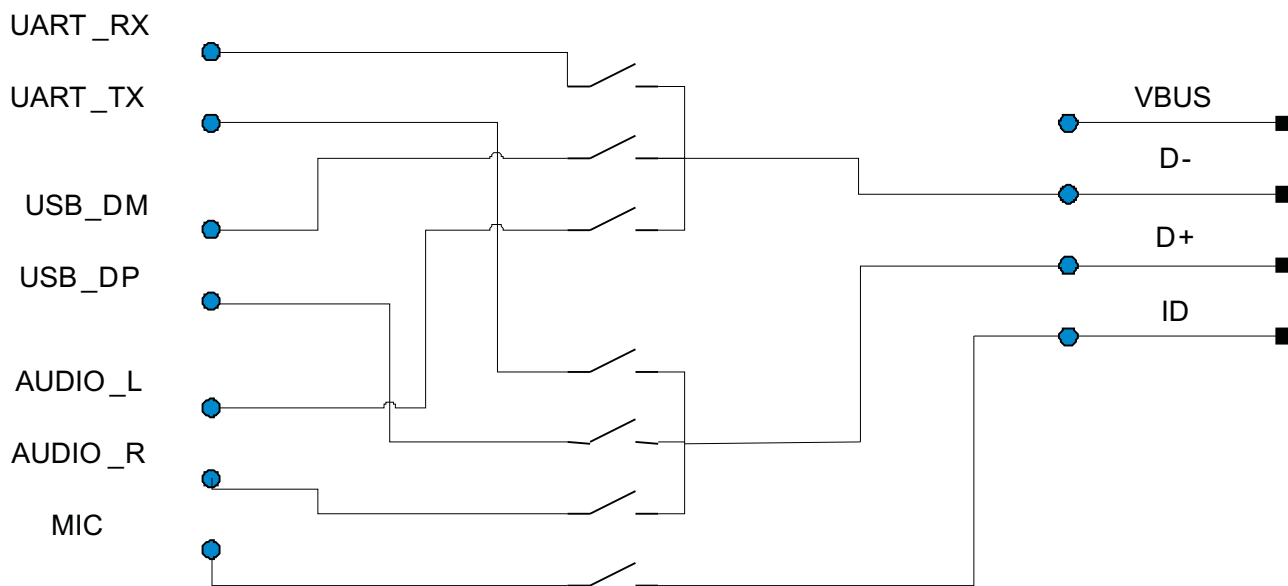

**TERMINAL FUNCTIONS**

| <b>TERMINAL</b>         |            | <b>TYPE</b> | <b>DESCRIPTION</b>                                                   |
|-------------------------|------------|-------------|----------------------------------------------------------------------|
| <b>NAME</b>             | <b>NO.</b> |             |                                                                      |
| AUDIO_L                 | D1         | I/O         | Stereo audio left channel                                            |
| AUDIO_R                 | C1         | I/O         | Stereo audio right channel                                           |
| CLDO                    | A1         | O           | Capacitor connection for LDO noise filtering                         |
| DM                      | E2         | I/O         | Common I/O port for USB, UART, Audio. Connected to USB receptacle.   |
| DP                      | E3         | I/O         | Common I/O port for USB, UART, Audio. Connected to USB receptacle.   |
| DSS                     | C2         | I           | Pulldown or pullup resistor connection to determine default switch   |
| GND                     | D2         | GND         | Ground                                                               |
| ID                      | D3         | I/O         | Common I/O port for microphone, ID detection                         |
| $\overline{\text{INT}}$ | B3         | O           | Open-drain interrupt output. Connect an external pullup resistor.    |
| ISSET                   | B4         | O           | Output to charger for high-current charging mode. Open-drain output. |
| MIC                     | A4         | I/O         | Microphone signal                                                    |
| R2.2K                   | A3         | I           | 2.21 k $\Omega$ connection for microphone bias                       |
| SCL                     | B2         | I           | I <sup>2</sup> C clock input. Connect an external pullup resistor.   |
| SDA                     | A2         | I/O         | I <sup>2</sup> C data. Connect an external pullup resistor.          |
| UART_RX                 | C3         | I/O         | UART receive data                                                    |
| UART_TX                 | C4         | I/O         | UART transmit data                                                   |
| USB_DM                  | D4         | I/O         | USB D– connected to host                                             |
| USB_DP                  | E4         | I/O         | USB D+ connected to host                                             |
| V <sub>BUS</sub>        | E1         | I           | V <sub>BUS</sub> power supply from USB receptacle                    |
| V <sub>SUPPLY</sub>     | B1         | I           | 2.8-V to 4.4-V battery supply voltage                                |

## ABSOLUTE MAXIMUM RATINGS<sup>(1) (2)</sup>

over operating free-air temperature range (unless otherwise noted)

|                      |                                                      |               | MIN  | MAX                      | UNIT |
|----------------------|------------------------------------------------------|---------------|------|--------------------------|------|
| V <sub>BUS</sub>     | Supply voltage from USB connector                    |               | −0.5 | 28                       | V    |
| V <sub>SUPPLY</sub>  | Supply voltage from battery                          |               | −0.5 | 6                        | V    |
| V <sub>USBIO</sub>   | Switch I/O voltage range                             | USB switch    | −0.5 | V <sub>SUPPLY</sub> +0.5 | V    |
| V <sub>UARTIO</sub>  |                                                      | UART switch   | −0.5 | V <sub>SUPPLY</sub> +0.5 | V    |
| V <sub>AUDIO</sub>   |                                                      | Audio switch  | −1.5 | V <sub>SUPPLY</sub> +0.5 | V    |
| V <sub>MICIO</sub>   |                                                      | Mic switch    | −0.5 | V <sub>SUPPLY</sub> +0.5 |      |
| V <sub>LOGICIO</sub> | Logic input, output and I/O voltage ranges           | DSS, SCL, SDA | −0.5 | V <sub>SUPPLY</sub> +0.5 | V    |
| I <sub>BUS</sub>     | Input current on V <sub>BUS</sub> pin                |               |      | 100                      | mA   |
| I <sub>SUPPLY</sub>  | Input current on V <sub>SUPPLY</sub> pin             |               |      | 100                      | mA   |
| I <sub>GND</sub>     | Continuous current through GND                       |               |      | 100                      | mA   |
| I <sub>K</sub>       | Analog port diode current                            |               | −50  | 50                       | mA   |
| I <sub>SW-DC</sub>   | ON-state continuous switch current                   |               | −60  | 60                       | mA   |
| I <sub>SW-PEAK</sub> | ON-state peak switch current                         |               | −150 | 150                      | mA   |
| I <sub>IK</sub>      | Digital logic input clamp current V <sub>L</sub> < 0 |               |      | −50                      | mA   |
| I <sub>LOGIC_O</sub> | Continuous current through logic output              |               |      | 50                       | mA   |
| T <sub>stg</sub>     | Storage temperature range                            |               | −65  | 150                      | °C   |

- (1) Stresses above these ratings may cause permanent damage. Exposure to absolute maximum conditions for extended periods may degrade device reliability. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those specified is not implied.
- (2) The algebraic convention, whereby the most negative value is a minimum and the most positive value is a maximum.

## THERMAL IMPEDANCE RATINGS

|                 |                           |             | UNIT      |
|-----------------|---------------------------|-------------|-----------|
| θ <sub>JA</sub> | Package thermal impedance | YZP package | 75.5 °C/W |

## RECOMMENDED OPERATING CONDITIONS

|                      |                                            | MIN  | MAX                 | UNIT |
|----------------------|--------------------------------------------|------|---------------------|------|
| V <sub>BUS</sub>     | Supply voltage from USB connector          | 4.35 | 6.7                 | V    |
| V <sub>SUPPLY</sub>  | Supply voltage from battery                | 2.8  | 4.4                 | V    |
| V <sub>USBIO</sub>   | Switch I/O voltage range                   | 0    | 3.6                 | V    |
| V <sub>UARTIO</sub>  |                                            | 0    | V <sub>SUPPLY</sub> |      |
| V <sub>AUDIO</sub>   |                                            | –1.3 | 1.3                 |      |
| V <sub>MICIO</sub>   |                                            | 0    | 2.3                 |      |
| V <sub>LOGICIO</sub> | Logic input, output and I/O voltage ranges | 0    | V <sub>SUPPLY</sub> | V    |
| I <sub>SW-DC</sub>   | ON-state continuous switch current         |      |                     | mA   |
| I <sub>SWPEAK</sub>  | ON-state peak switch current               |      |                     | mA   |
| T <sub>A</sub>       | Ambient temperature                        | –40  | 85                  | °C   |

## ELECTRICAL CHARACTERISTICS

$T_A = -40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ , typical values are at  $V_{\text{SUPPLY}} = 3.6\text{ V}$ ,  $V_{\text{BUS}} = 5\text{ V}$ ,  $T_A = 25^{\circ}\text{C}$  (unless otherwise noted)

| PARAMETER                          | SYMBOL               | TEST CONDITIONS                                                                                |                                           | MIN | TYP  | MAX | UNIT             |
|------------------------------------|----------------------|------------------------------------------------------------------------------------------------|-------------------------------------------|-----|------|-----|------------------|
| $V_{\text{SUPPLY}}$ supply current | $I_{\text{VSUPPLY}}$ | $V_{\text{SUPPLY}} = 4.2\text{ V}$ , $V_{\text{BUS}} = 0\text{ V}$ ,<br>$\text{ADC\_EN} = 0$ , | $\text{CP\_EN} = 0$ , $\text{SEMREN} = 0$ |     | 6    | 10  | $\mu\text{A}$    |
|                                    |                      |                                                                                                | $\text{CP\_EN} = 0$ , $\text{SEMREN} = 1$ |     | 6    | 10  |                  |
|                                    |                      |                                                                                                | $\text{CP\_EN} = 1$ , $\text{SEMREN} = 1$ |     | 60   | 70  |                  |
| $V_{\text{BUS}}$ supply current    | $I_{\text{VBUS}}$    | $V_{\text{SUPPLY}} = 3.6\text{ V}$ , $V_{\text{BUS}} = 5\text{ V}$ ,<br>$\text{ADC\_EN} = 0$ , | $\text{CP\_EN} = 0$ , $\text{SEMREN} = 0$ |     | 45   | 60  | $\mu\text{A}$    |
|                                    |                      |                                                                                                | $\text{CP\_EN} = 0$ , $\text{SEMREN} = 1$ |     | 45   | 60  |                  |
|                                    |                      |                                                                                                | $\text{CP\_EN} = 1$ , $\text{SEMREN} = 1$ |     | 80   | 98  |                  |
| $V_{\text{BUS}}$ detect threshold  | $V_{\text{BUSDET}}$  | $V_{\text{BUS}} = 0$ to $5\text{ V}$ , read the INT                                            |                                           | 3   | 3.5  | 4   | V                |
| Microphone removal threshold       | $V_{\text{MRCOMP}}$  | Ramp ID down, read the INT                                                                     | LDO voltage = $2.6\text{ V}$              |     | 2.2  |     | V                |
|                                    |                      |                                                                                                | LDO voltage = $2.3\text{ V}$              |     | 1.95 |     |                  |
| SEND/END threshold                 | $V_{\text{SECOMP}}$  | LDO voltage = $2.3$ or $2.6\text{ V}$ , ramp ID up from $0\text{ V}$ , read the INT            |                                           |     | 0.15 |     | V                |
| ID resistance 1                    | $R_{\text{ID1}}$     | $\text{ID\_200} = 1$ , $V_{\text{SUPPLY}} = 3.6\text{ V}$                                      |                                           | 160 | 200  | 240 | $\text{k}\Omega$ |
| ID resistance 2                    | $R_{\text{ID2}}$     | $\text{ID\_620} = 1$ , $V_{\text{SUPPLY}} = 3.6\text{ V}$                                      |                                           | 496 | 620  | 744 | $\Omega$         |

## LDO ELECTRICAL CHARACTERISTICS

$T_A = -40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ , typical values are at  $V_{\text{SUPPLY}} = 3.6\text{ V}$ ,  $V_{\text{BUS}} = 5\text{ V}$ ,  $T_A = 25^{\circ}\text{C}$  (unless otherwise noted)

| PARAMETER               | SYMBOL              | TEST CONDITIONS                                                                                                  |                                                    | MIN  | TYP | MAX  | UNIT          |
|-------------------------|---------------------|------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|------|-----|------|---------------|
| Input voltage           | $V_{\text{BUS}}$    |                                                                                                                  |                                                    | 4.35 | 5   | 6.7  | V             |
|                         | $V_{\text{SUPPLY}}$ |                                                                                                                  |                                                    | 2.8  |     | 4.4  |               |
| Output voltage          | $V_{\text{OUT-26}}$ | $I_O = 0\text{ mA}$                                                                                              |                                                    | 2.54 | 2.6 | 2.65 | V             |
|                         | $V_{\text{OUT-23}}$ |                                                                                                                  |                                                    | 2.2  | 2.3 | 2.35 |               |
| Max output current      | $I_{\text{O-26}}$   | Measured at R2.2K pin                                                                                            |                                                    |      |     | 10   | $\mu\text{A}$ |
|                         | $I_{\text{O-23}}$   |                                                                                                                  |                                                    |      |     | 500  |               |
| Power supply rejection  | $\text{PSR}_{217}$  | $V_{\text{OUT}} = 2.3\text{ V}$ , $V_{\text{SUPPLY}} = 3.2\text{ V}$ , $I_O = 150$ to $450\text{ }\mu\text{A}$ , | $f = 217\text{ Hz}$                                |      | -50 |      | dB            |
|                         | $\text{PSR}_{1k}$   |                                                                                                                  | $f = 1\text{ kHz}$                                 |      | -42 |      | dB            |
| Integrated output noise | $e_{\text{n-OUT}}$  | $V_{\text{OUT}} = 2.3\text{ V}$ , $V_{\text{SUPPLY}} = 3.2\text{ V}$ , $I_O = 150$ to $450\text{ }\mu\text{A}$ , | $f = 20\text{ Hz}$ to $20\text{ kHz}$ (A-weighted) |      | 1   | 50   | $\mu\text{V}$ |
| Rise time 1             | $t_{r1}$            | $I_O = 20\text{ }\mu\text{A}$ , R2.2K = $0$ to $2.6\text{ V}$                                                    |                                                    |      | 178 |      | ms            |
| Rise time 2             | $t_{r2}$            | $I_O = 20\text{ }\mu\text{A}$ , R2.2K = $2.3$ to $2.6\text{ V}$                                                  |                                                    |      | 260 |      | ms            |
| Fall time               | $t_f$               | $I_O = 0\text{ }\mu\text{A}$ , R2.2K = $2.6$ to $2.3\text{ V}$                                                   |                                                    |      | 2.5 |      | ms            |

## USB SWITCH ELECTRICAL CHARACTERISTICS FOR 2.8 V to 4.4 V SUPPLY

$T_A = -40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ , typical values are at  $V_{\text{SUPPLY}} = 3.6\text{ V}$ ,  $V_{\text{BUS}} = 5\text{ V}$ ,  $T_A = 25^{\circ}\text{C}$  (unless otherwise noted)

| PARAMETER                                                           | SYMBOL                                     | TEST CONDITIONS                                                                                            |                                                       | MIN | TYP | MAX | UNIT |
|---------------------------------------------------------------------|--------------------------------------------|------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|-----|-----|-----|------|
| Analog Switch                                                       |                                            |                                                                                                            |                                                       |     |     |     |      |
| Analog signal range                                                 | V <sub>USBIO</sub>                         |                                                                                                            |                                                       | 0   |     | 3.6 | V    |
| ON-state resistance                                                 | r <sub>ON</sub>                            | V <sub>I</sub> = 0 V to 3.6 V,<br>I <sub>O</sub> = −2 mA,                                                  | V <sub>SUPPLY</sub> = 3.0 V,<br>CP_EN = 1, Switch ON  |     | 4.5 | 10  | Ω    |
| ON-state resistance match between channels                          | Δr <sub>ON</sub>                           | V <sub>I</sub> = 0.4 V, I <sub>O</sub> = −2 mA,                                                            | V <sub>SUPPLY</sub> = 3.0 V,<br>CP_EN = 1, Switch ON  |     | 1   | 1.5 | Ω    |
| ON-state resistance flatness                                        | r <sub>ON(flat)</sub>                      | V <sub>I</sub> = 0 V to 3.6 V,<br>I <sub>O</sub> = −2 mA, V <sub>SUPPLY</sub> = 3.0 V                      | CP_EN = 1, Switch ON                                  |     | 0.5 | 1   | Ω    |
| V <sub>I</sub> or V <sub>O</sub> OFF leakage current <sup>(1)</sup> | I <sub>IO(OFF)</sub>                       | V <sub>I</sub> = 0.3 V, V <sub>O</sub> = 2.5 V or<br>V <sub>I</sub> = 2.5 V, V <sub>O</sub> = 0.3 V,       | V <sub>SUPPLY</sub> = 4.4 V,<br>Switch OFF            |     | 25  | 360 | nA   |
| V <sub>O</sub> ON leakage current <sup>(1)</sup>                    | I <sub>IO(ON)</sub>                        | V <sub>I</sub> = OPEN, V <sub>O</sub> = 0.3 V or 2.5 V,                                                    | V <sub>SUPPLY</sub> = 4.4 V,<br>CP_EN = 1, Switch ON  |     | 10  | 360 | nA   |
| Dynamic                                                             |                                            |                                                                                                            |                                                       |     |     |     |      |
| Turn-ON time                                                        | t <sub>ON</sub>                            | V <sub>I</sub> or V <sub>O</sub> = V <sub>SUPPLY</sub> ,<br>R <sub>L</sub> = 50 Ω, C <sub>L</sub> = 35 pF  | CP_EN = 1<br>From receipt of I <sup>2</sup> C ACK bit |     | 1   |     | ms   |
| Turn-OFF time                                                       | t <sub>OFF</sub>                           | V <sub>I</sub> or V <sub>O</sub> = V <sub>SUPPLY</sub> ,<br>R <sub>L</sub> = 50 Ω, C <sub>L</sub> = 35 pF, | CP_EN = 0<br>From receipt of I <sup>2</sup> C ACK bit |     | 1   |     | ms   |
| V <sub>I</sub> OFF capacitance <sup>(1)</sup>                       | C <sub>I(OFF)</sub>                        | DC bias = 0 V or 3.6 V<br>f = 10 MHz,                                                                      | CP_EN = 0, Switch OFF                                 |     | 6.5 |     | pF   |
| V <sub>O</sub> OFF capacitance <sup>(1)</sup>                       | C <sub>O(OFF)</sub>                        | DC bias = 0 V or 3.6 V<br>f = 10 MHz,                                                                      | CP_EN = 0, Switch OFF                                 |     | 3   |     | pF   |
| V <sub>I</sub> , V <sub>O</sub> ON capacitance <sup>(1)</sup>       | C <sub>I(ON)</sub> ,<br>C <sub>O(ON)</sub> | DC bias = 0 V or 3.6 V<br>f = 10 MHz,                                                                      | CP_EN = 1, Switch ON                                  |     | 9   |     | pF   |
| Bandwidth                                                           | BW                                         | R <sub>L</sub> = 50 Ω,                                                                                     | CP_EN = 1, Switch ON                                  |     | 830 |     | MHz  |
| OFF Isolation                                                       | O <sub>ISO</sub>                           | f = 240 MHz, R <sub>L</sub> = 50 Ω,<br>C <sub>L</sub> = 20 pF,                                             | CP_EN = 0, Switch OFF                                 |     | −20 |     | dB   |
| Crosstalk                                                           | X <sub>TALK</sub>                          | f = 240 MHz, R <sub>L</sub> = 50 Ω,<br>C <sub>I</sub> = 20 pF,                                             | CP_EN = 1, Switch ON                                  |     | −42 |     | dB   |

(1)  $V_I$  = voltage asserted on DP and DM pins.  $V_O$  = voltage asserted on USB\_DP and USB\_DM pins.  $I_O$  = current on the USB\_DP or USB\_DM pins.

## UART SWITCH ELECTRICAL CHARACTERISTICS FOR 2.8 V to 4.4 V SUPPLY

$T_A = -40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ , typical values are at  $V_{\text{SUPPLY}} = 3.6\text{ V}$ ,  $V_{\text{BUS}} = 5\text{ V}$ ,  $T_A = 25^{\circ}\text{C}$  (unless otherwise noted)

| PARAMETER                                                           | SYMBOL                                     | TEST CONDITIONS                                                                                           |                                                      | MIN | TYP                 | MAX | UNIT |
|---------------------------------------------------------------------|--------------------------------------------|-----------------------------------------------------------------------------------------------------------|------------------------------------------------------|-----|---------------------|-----|------|
| Analog Switch                                                       |                                            |                                                                                                           |                                                      |     |                     |     |      |
| Analog signal range                                                 | V <sub>UARTIO</sub>                        |                                                                                                           |                                                      | 0   | V <sub>SUPPLY</sub> |     | V    |
| ON-state resistance                                                 | r <sub>ON</sub>                            | V <sub>I</sub> = 0 V to 2.8 V,<br>I <sub>O</sub> = −2 mA,                                                 | V <sub>SUPPLY</sub> = 2.8 V,<br>CP_EN = 1, Switch ON |     | 37                  | 61  | Ω    |
| ON-state resistance match between channels                          | Δr <sub>ON</sub>                           | V <sub>I</sub> = 0.4 V, I <sub>O</sub> = −2 mA,                                                           | V <sub>SUPPLY</sub> = 2.8 V,<br>Switch ON            |     | 2                   | 3.5 | Ω    |
| ON-state resistance flatness                                        | r <sub>ON(flat)</sub>                      | V <sub>I</sub> = 0 V to 2.8 V,<br>I <sub>O</sub> = −2 mA, V <sub>SUPPLY</sub> = 2.8 V                     | Switch ON                                            |     | 20                  | 27  | Ω    |
| V <sub>I</sub> or V <sub>O</sub> OFF leakage current <sup>(1)</sup> | I <sub>IO(OFF)</sub>                       | V <sub>I</sub> = 0.3 V, V <sub>O</sub> = 3.3 V or<br>V <sub>I</sub> = 3.3 V, V <sub>O</sub> = 0.3 V,      | V <sub>SUPPLY</sub> = 3.6 V,<br>Switch OFF           |     | 100                 | 360 | nA   |
| V <sub>O</sub> ON leakage current <sup>(1)</sup>                    | I <sub>IO(ON)</sub>                        | V <sub>I</sub> = OPEN, V <sub>O</sub> = 0.3 V or 3.3 V,                                                   | V <sub>SUPPLY</sub> = 3.6 V,<br>CP_EN = 1, Switch ON |     | 100                 | 360 | nA   |
| Dynamic                                                             |                                            |                                                                                                           |                                                      |     |                     |     |      |
| Turn-ON time                                                        | t <sub>ON</sub>                            | V <sub>I</sub> or V <sub>O</sub> = V <sub>SUPPLY</sub> ,<br>R <sub>L</sub> = 50 Ω, C <sub>L</sub> = 35 pF | From receipt of I <sup>2</sup> C ACK bit             |     | 1                   |     | ms   |
| Turn-OFF time                                                       | t <sub>OFF</sub>                           | V <sub>I</sub> or V <sub>O</sub> = V <sub>SUPPLY</sub> ,<br>R <sub>L</sub> = 50 Ω, C <sub>L</sub> = 35 pF | From receipt of I <sup>2</sup> C ACK bit             |     | 1                   |     | ms   |
| V <sub>I</sub> OFF capacitance <sup>(1)</sup>                       | C <sub>I(OFF)</sub>                        | DC bias = 0 V or V <sub>SUPPLY</sub> ,<br>f = 10 MHz,                                                     | Switch OFF                                           |     | 6.5                 |     | pF   |
| V <sub>O</sub> OFF capacitance <sup>(1)</sup>                       | C <sub>O(OFF)</sub>                        | DC bias = 0 V or V <sub>SUPPLY</sub> ,<br>f = 10 MHz,                                                     | Switch OFF                                           |     | 8                   |     | pF   |
| V <sub>I</sub> , V <sub>O</sub> ON capacitance <sup>(1)</sup>       | C <sub>I(ON)</sub> ,<br>C <sub>O(ON)</sub> | DC bias = 0 V or V <sub>SUPPLY</sub> ,<br>f = 10 MHz,                                                     | Switch ON                                            |     | 22                  |     | pF   |
| Bandwidth                                                           | BW                                         | R <sub>L</sub> = 50 Ω,                                                                                    | Switch ON                                            |     | 295                 |     | MHz  |
| OFF Isolation                                                       | O <sub>ISO</sub>                           | f = 250 kHz, R <sub>L</sub> = 50 Ω,<br>C <sub>L</sub> = 20 pF,                                            | Switch OFF                                           |     | −100                |     | dB   |
| Crosstalk                                                           | X <sub>TALK</sub>                          | f = 250 kHz, R <sub>L</sub> = 50 Ω,<br>C <sub>L</sub> = 20 pF,                                            | Switch ON                                            |     | −98                 |     | dB   |

(1)  $V_I$  = voltage asserted on DP and DM pins.  $V_O$  = voltage asserted on UART\_RX and UART\_TX pins.  $I_O$  = current on the UART\_RX and UART\_TX pins.

## AUDIO SWITCH ELECTRICAL CHARACTERISTICS FOR 2.8 V to 4.4 V SUPPLY

$T_A = -40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ , typical values are at  $V_{\text{SUPPLY}} = 3.6\text{ V}$ ,  $V_{\text{BUS}} = 5\text{ V}$ ,  $T_A = 25^{\circ}\text{C}$  (unless otherwise noted)

| PARAMETER                                                           | SYMBOL                                     | TEST CONDITIONS                                                                                           |                                             | MIN  | TYP   | MAX  | UNIT |
|---------------------------------------------------------------------|--------------------------------------------|-----------------------------------------------------------------------------------------------------------|---------------------------------------------|------|-------|------|------|
| Analog Switch                                                       |                                            |                                                                                                           |                                             |      |       |      |      |
| Analog signal range                                                 | V <sub>AUDIOIO</sub>                       |                                                                                                           |                                             | −1.3 |       | 1.3  | V    |
| ON-state resistance                                                 | r <sub>ON</sub>                            | V <sub>I</sub> = ±1.3 V, I <sub>O</sub> = −20 mA,<br>V <sub>SUPPLY</sub> = 2.8 V,                         | AUDIO_L or<br>AUDIO_R,<br>DM or DP          |      | 3.8   | 6    | Ω    |
| ON-state resistance match between channels                          | Δr <sub>ON</sub>                           | V <sub>I</sub> = 1.3 V, I <sub>O</sub> = −20 mA,<br>V <sub>SUPPLY</sub> = 2.8 V,                          | AUDIO_L or<br>AUDIO_R,<br>DM or DP          |      | 1     | 1.3  | Ω    |
| ON-state resistance flatness                                        | r <sub>ON(flat)</sub>                      | V <sub>I</sub> = ±1.3 V, I <sub>O</sub> = −20 mA,<br>V <sub>SUPPLY</sub> = 2.8 V,                         | AUDIO_L or<br>AUDIO_R,<br>DM or DP          |      | 0.1   | 0.25 | Ω    |
| V <sub>I</sub> or V <sub>O</sub> OFF leakage current <sup>(1)</sup> | I <sub>IO(OFF)</sub>                       | V <sub>I</sub> = 0 V, V <sub>O</sub> = 1.3 V<br>or<br>V <sub>I</sub> = 1.3 V, V <sub>O</sub> = 0.3 V,     | Switch OFF                                  |      | 25    | 400  | nA   |
| V <sub>O</sub> ON leakage current <sup>(1)</sup>                    | I <sub>IO(ON)</sub>                        | V <sub>I</sub> = OPEN, V <sub>O</sub> = ±1.3 V,<br>V <sub>SUPPLY</sub> = 4.4 V,                           | Switch ON                                   |      | 25    | 400  | nA   |
| Dynamic                                                             |                                            |                                                                                                           |                                             |      |       |      |      |
| Turn-ON time                                                        | t <sub>ON</sub>                            | V <sub>I</sub> or V <sub>O</sub> = V <sub>SUPPLY</sub> ,<br>R <sub>L</sub> = 50 Ω, C <sub>L</sub> = 35 pF | From receipt of I <sup>2</sup> C<br>ACK bit |      | 1     |      | ms   |
| Turn-OFF time                                                       | t <sub>OFF</sub>                           | V <sub>I</sub> or V <sub>O</sub> = V <sub>SUPPLY</sub> ,<br>R <sub>L</sub> = 50 Ω, C <sub>L</sub> = 35 pF | From receipt of I <sup>2</sup> C<br>ACK bit |      | 1     |      | ms   |
| V <sub>I</sub> OFF capacitance <sup>(1)</sup>                       | C <sub>I(OFF)</sub>                        | DC bias = 0 V or 2.6 V,<br>f = 10 MHz,                                                                    | Switch OFF                                  |      | 4.5   |      | pF   |
| V <sub>O</sub> OFF capacitance <sup>(1)</sup>                       | C <sub>O(OFF)</sub>                        | DC bias = 0 V or 2.6 V ,<br>f = 10 MHz,                                                                   | Switch OFF                                  |      | 6.5   |      | pF   |
| V <sub>I</sub> , V <sub>O</sub> ON capacitance <sup>(1)</sup>       | C <sub>I(ON)</sub> ,<br>C <sub>O(ON)</sub> | DC bias = 0 V or 2.6 V,<br>f = 10 MHz,                                                                    | Switch ON                                   |      | 9     |      | pF   |
| Bandwidth                                                           | BW                                         | R <sub>L</sub> = 50 Ω,                                                                                    | Switch ON                                   |      | 788   |      | MHz  |
| OFF Isolation                                                       | O <sub>ISO</sub>                           | f = 20 kHz, R <sub>L</sub> = 50 Ω,                                                                        | Switch OFF                                  |      | −100  |      | dB   |
| Crosstalk                                                           | X <sub>TALK</sub>                          | f = 20 kHz, R <sub>L</sub> = 50 Ω,                                                                        | Switch ON                                   |      | −120  |      | dB   |
| Total harmonic distortion                                           | THD                                        | R <sub>L</sub> = 16 Ω, C <sub>L</sub> = 20 pF,<br>f = 20 Hz to 20 kHz,<br>2.6 Vpp                         |                                             |      | 0.087 | 0.12 | %    |

(1)  $V_O$  = voltage asserted on DP and DM pins.  $V_I$  = voltage asserted on AUDIO\_R and AUDIO\_L pins.  $I_O$  = current on the DP and DM pins.

## MIC SWITCH ELECTRICAL CHARACTERISTICS FOR 2.8 V to 4.4 V SUPPLY

$T_A = -40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ , typical values are at  $V_{\text{SUPPLY}} = 3.6\text{ V}$ ,  $V_{\text{BUS}} = 5\text{ V}$ ,  $T_A = 25^{\circ}\text{C}$  (unless otherwise noted)

| PARAMETER                                                           | SYMBOL                                     | TEST CONDITIONS                                                                                                                        |                                             | MIN | TYP  | MAX   | UNIT |
|---------------------------------------------------------------------|--------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|-----|------|-------|------|
| Analog Switch                                                       |                                            |                                                                                                                                        |                                             |     |      |       |      |
| Analog signal range                                                 | V <sub>MICIO</sub>                         |                                                                                                                                        |                                             | 0   |      | 2.3   | V    |
| ON-state resistance                                                 | r <sub>ON</sub>                            | V <sub>I</sub> = 2.3 V, I <sub>O</sub> = −2 mA,<br>V <sub>SUPPLY</sub> = 2.8 V,                                                        | MIC ID                                      |     | 9    | 12    | Ω    |
| ON-state resistance flatness                                        | r <sub>ON(flat)</sub>                      | V <sub>I</sub> = 2.3 V , I <sub>O</sub> = −2 mA,<br>V <sub>SUPPLY</sub> = 2.8 V                                                        | MIC ID                                      |     | 0.5  | 1     | Ω    |
| V <sub>I</sub> or V <sub>O</sub> OFF leakage current <sup>(1)</sup> | I <sub>IO(OFF)</sub>                       | V <sub>I</sub> = 0.3 V, V <sub>O</sub> = 2.3 V<br>or<br>V <sub>I</sub> = 2.3 V, V <sub>O</sub> = 0.3 V,<br>V <sub>SUPPLY</sub> = 4.4 V | Switch OFF                                  |     | 5    | 200   | nA   |
| V <sub>O</sub> ON leakage current <sup>(1)</sup>                    | I <sub>IO(ON)</sub>                        | V <sub>I</sub> = OPEN<br>V <sub>O</sub> = 0.3 V or 2.5 V<br>V <sub>SUPPLY</sub> = 4.4 V                                                | Switch ON                                   |     | 2    | 200   | nA   |
| Dynamic                                                             |                                            |                                                                                                                                        |                                             |     |      |       |      |
| Turn-ON time                                                        | t <sub>ON</sub>                            | V <sub>I</sub> or V <sub>O</sub> = V <sub>SUPPLY</sub> ,<br>R <sub>L</sub> = 50 Ω, C <sub>L</sub> = 35 pF                              | From receipt of I <sup>2</sup> C<br>ACK bit |     | 1    |       | ms   |
| Turn-OFF time                                                       | t <sub>OFF</sub>                           | V <sub>I</sub> or V <sub>O</sub> = V <sub>SUPPLY</sub> ,<br>R <sub>L</sub> = 50 Ω, C <sub>L</sub> = 35 pF                              | From receipt of I <sup>2</sup> C<br>ACK bit |     | 1    |       | ms   |
| V <sub>I</sub> OFF capacitance <sup>(1)</sup>                       | C <sub>I(OFF)</sub>                        | DC bias = 0 V or 3.6 V,<br>f = 10 MHz,                                                                                                 | Switch OFF                                  |     | 6    |       | pF   |
| V <sub>O</sub> OFF capacitance <sup>(1)</sup>                       | C <sub>O(OFF)</sub>                        | DC bias = 0 V or 3.6 V ,<br>f = 10 MHz,                                                                                                | Switch OFF                                  |     | 6    |       | pF   |
| V <sub>I</sub> , V <sub>O</sub> ON capacitance <sup>(1)</sup>       | C <sub>I(ON)</sub> ,<br>C <sub>O(ON)</sub> | DC bias = 0 V or 3.6 V,<br>f = 10 MHz,                                                                                                 | Switch ON                                   |     | 12   |       | pF   |
| Bandwidth                                                           | BW                                         | R <sub>L</sub> = 50 Ω,                                                                                                                 | Switch ON                                   |     | 573  |       | MHz  |
| OFF Isolation                                                       | O <sub>ISO</sub>                           | f = 20 kHz, R <sub>L</sub> = 50 Ω,                                                                                                     | Switch OFF                                  |     | −37  |       | dB   |
| Crosstalk                                                           | X <sub>TALK</sub>                          | f = 20 kHz to audio input,<br>R <sub>L</sub> = 50 Ω,                                                                                   | Switch ON                                   |     | −125 |       | dB   |
| Total harmonic distortion                                           | THD                                        | R <sub>L</sub> = 600 Ω, C <sub>L</sub> = 20 pF,<br>f = 20 Hz to 20 kHz,<br>2.6 Vpp                                                     |                                             |     | 0.07 | 0.075 | %    |

(1)  $V_I$  = voltage asserted on the ID pin.  $V_O$  = voltage asserted on MIC pin.  $I_O$  = current on the MIC pin.

## DIGITAL SIGNALS

$T_A = -40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$  (unless otherwise noted), typical values are at  $V_{\text{SUPPLY}} = 3.6\text{ V}$ ,  $V_{\text{BUS}} = 5\text{ V}$ ,  $T_A = 25^{\circ}\text{C}$

| PARAMETER              | SYMBOL              | TEST CONDITIONS                          | MIN                            | MAX                            | UNIT          |
|------------------------|---------------------|------------------------------------------|--------------------------------|--------------------------------|---------------|
| <b>DSS</b>             |                     |                                          |                                |                                |               |
| High-level input logic | $V_{\text{IH}}$     |                                          | $V_{\text{SUPPLY}} \times 0.7$ | $V_{\text{SUPPLY}}$            | V             |
| Low-level input logic  | $V_{\text{IL}}$     |                                          | 0                              | $V_{\text{SUPPLY}} \times 0.3$ | V             |
| Input leakage current  | $I_{\text{INLEAK}}$ | $V_I = 0\text{ V to } V_{\text{SUPPLY}}$ | –1                             | 1                              | $\mu\text{A}$ |
| <b>SCL, SDA</b>        |                     |                                          |                                |                                |               |
| High-level input logic | $V_{\text{IH}}$     |                                          | 1.4                            |                                | V             |
| Low-level input logic  | $V_{\text{IL}}$     |                                          |                                | 0.4                            | V             |
| Input leakage current  | $I_{\text{INLEAK}}$ | $V_I = 0\text{ V to } V_{\text{SUPPLY}}$ | –1                             | 1                              | $\mu\text{A}$ |
| <b>INT, ISET</b>       |                     |                                          |                                |                                |               |
| Open-drain low         | $V_{\text{ODOL}}$   | $I_{\text{ODL}} = 4\text{ mA}$           |                                | 0.4                            | V             |

## APPLICATION INFORMATION

### Default Switch Position

The default switch state (DSS) pin determines if the USB switches or UART switches are selected at startup. An internal pulldown resistor is present on the DSS pin, which selects the USB switches as the default at start-up. If the user wants to default to the UART switches at startup, the DSS pin must be pulled high. If the user wants to disable the switches, this must be done using an I<sup>2</sup>C write to the SW\_Control register after initialization is complete.

The default configuration with V<sub>BAT</sub> power disables the switches. If the user wants to use the switches, this must be done using an I<sup>2</sup>C write to the SW\_Control register after initialization is complete.

| V <sub>BUS</sub> PRESENT<br>ON POWER UP | DSS       | SWITCH STATES |
|-----------------------------------------|-----------|---------------|
| Yes                                     | OPEN / PD | USB           |
|                                         | PU        | UART          |
| No                                      | x         | Disable       |

### ID Impedance Detection

The TS5USBA43402 features impedance detection for identification of various accessories that are attached to the microUSB port. Each accessory is identified by a unique resistor value on the ID pin to ground. During ID detection, the device auto-calibrates an internal current source, using an external 2.21K  $\pm$ 1% resistor. The current source is then applied to the ID pin while an internal voltage reference is incremented until it matches the ID pin voltage. This produces a 4-bit ADC value corresponding to the ID resistance found.

| ID Resistor    | Tolerance | ID No. | ADC Value |
|----------------|-----------|--------|-----------|
| 0 $\Omega$     | 1%        | 0      | 0000      |
| 24 k $\Omega$  | 1%        | 1      | 0001      |
| 56 k $\Omega$  | 1% or 20% | 2      | 0010      |
| 100 k $\Omega$ | 1%        | 3      | 0011      |
| 130 k $\Omega$ | 1%        | 4      | 0100      |
| 180 k $\Omega$ | 1%        | 5      | 0101      |
| 240 k $\Omega$ | 1%        | 6      | 0110      |
| 330 k $\Omega$ | 1%        | 7      | 0111      |
| 430 k $\Omega$ | 1%        | 8      | 1000      |
| 620 k $\Omega$ | 1%        | 9      | 1001      |
| 910 k $\Omega$ | 1%        | 10     | 1010      |
| Open           | N/A       | 11     | 1011      |

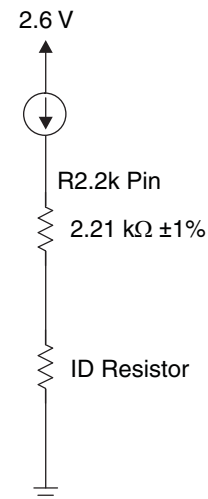


**Figure 1. Figure 1. Impedance Detection Circuitry**

## Supply Detection

The TS5USBA43402 can be powered by either  $V_{SUPPLY}$  or  $V_{BUS}$ . The TS5USBA43402 will select  $V_{BUS}$  as the power source when present and otherwise will select  $V_{SUPPLY}$  as the power source when  $V_{SUPPLY}$  is present and  $V_{BUS}$  is not.

### Supply Selection and Shutdown Sequence


|                   | $V_{SUPPLY}$   | HANDSET STATUS   | MUIC STATUS | POWER SUPPLY |
|-------------------|----------------|------------------|-------------|--------------|
| NORMAL CASE       | Yes            | ON               | Active      | $V_{SUPPLY}$ |
|                   | Yes            | OFF (S/W off)    | Shutdown    |              |
| SUDDEN POWER LOSS | Yes            | ON               | Active      | $V_{SUPPLY}$ |
|                   | No             | OFF              | Shutdown    |              |
| NO BATTERY        | No             | OFF              | Shutdown    |              |
|                   | No             | ON ( $V_{BUS}$ ) | Active      | $V_{BUS}$    |
| USB CHARGING      | Yes (charging) | ON ( $V_{BUS}$ ) | Active      | $V_{BUS}$    |


## I<sup>2</sup>C Controlled Internal Comparator Operation

### Internal Comparator Logic Table


| I <sup>2</sup> C CONTROL REGISTER BIT |        |        | COMPARATORS |     |     |     |
|---------------------------------------|--------|--------|-------------|-----|-----|-----|
| USB_DET_DS                            | ADC_EN | SEMREN | $V_{BUS}$   | SE  | MR  | LDO |
| 0                                     | 0      | 0      | ON          | OFF | OFF | OFF |
| 0                                     | 0      | 1      | ON          | ON  | ON  | ON  |
| 0                                     | 1      | 0      | ON          | OFF | ON  | ON  |
| 0                                     | 1      | 1      | ON          | ON  | ON  | ON  |
| 1                                     | 0      | 0      | OFF         | OFF | OFF | OFF |
| 1                                     | 0      | 1      | ON          | ON  | ON  | ON  |
| 1                                     | 1      | 0      | ON          | OFF | ON  | ON  |
| 1                                     | 1      | 1      | ON          | ON  | ON  | ON  |

## Software Flowchart

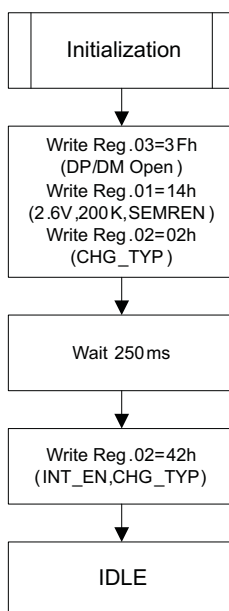

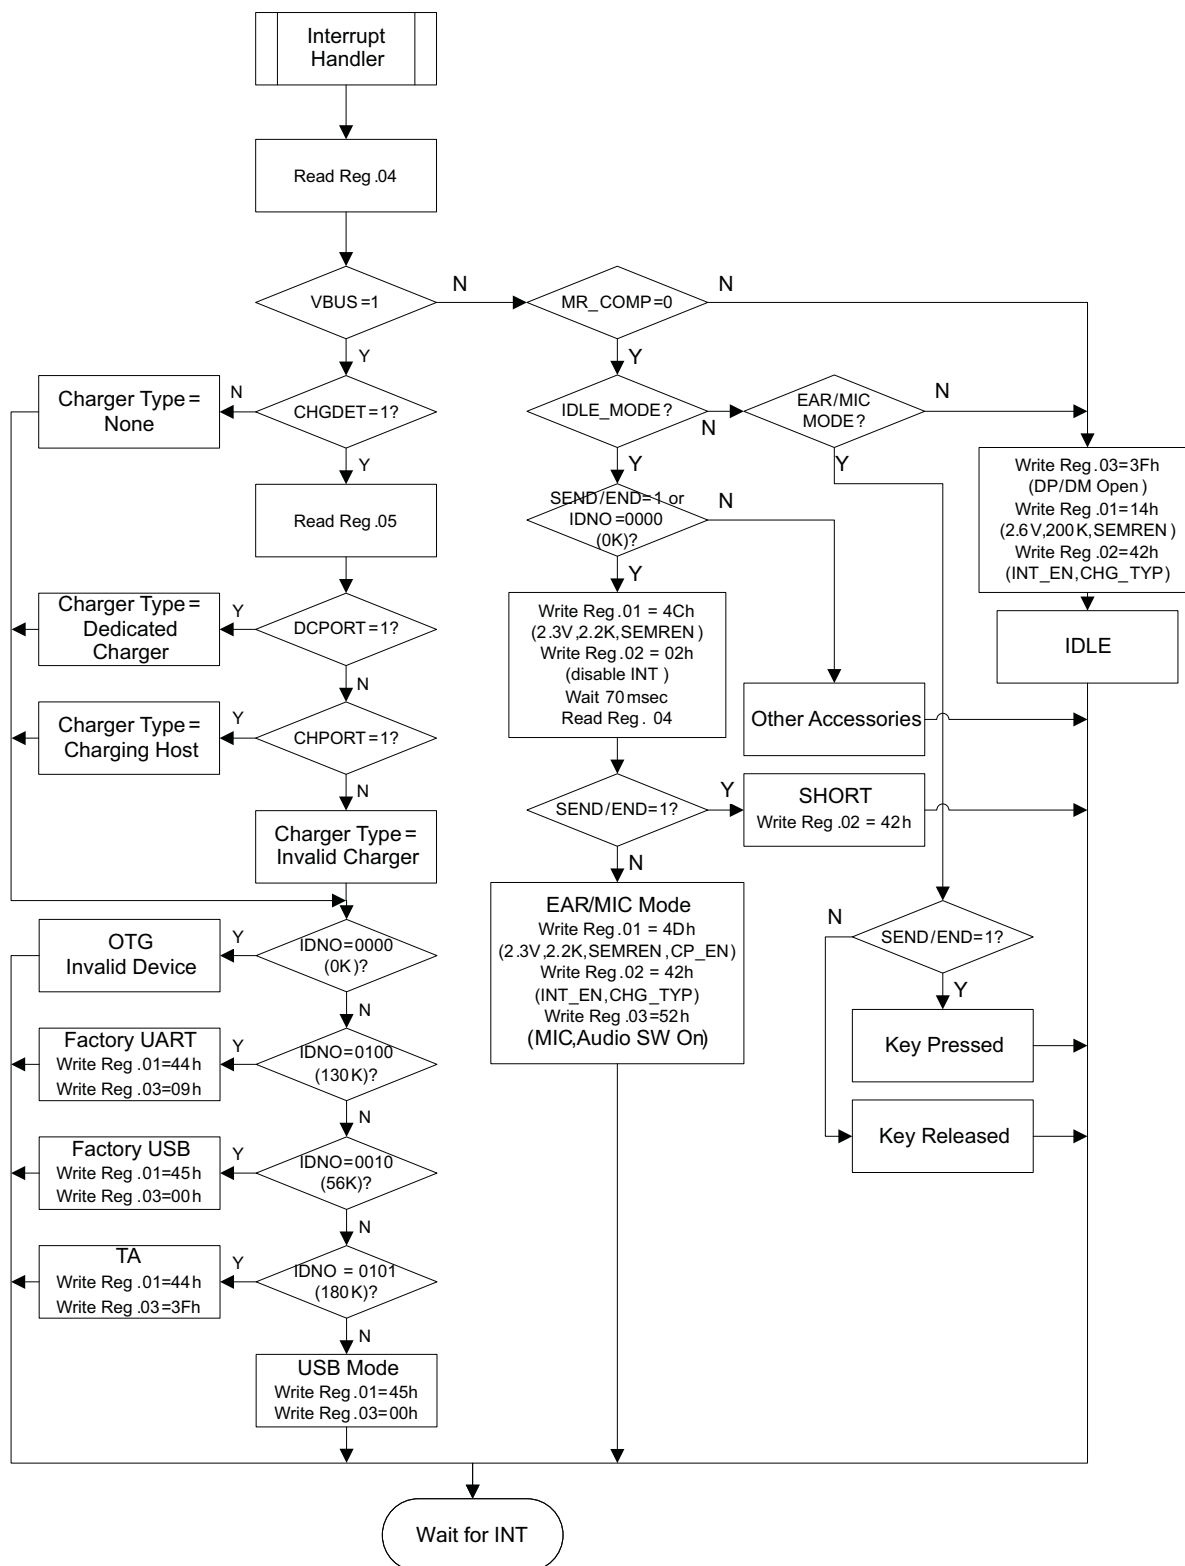

# FACTORY MODE FLOWCHART

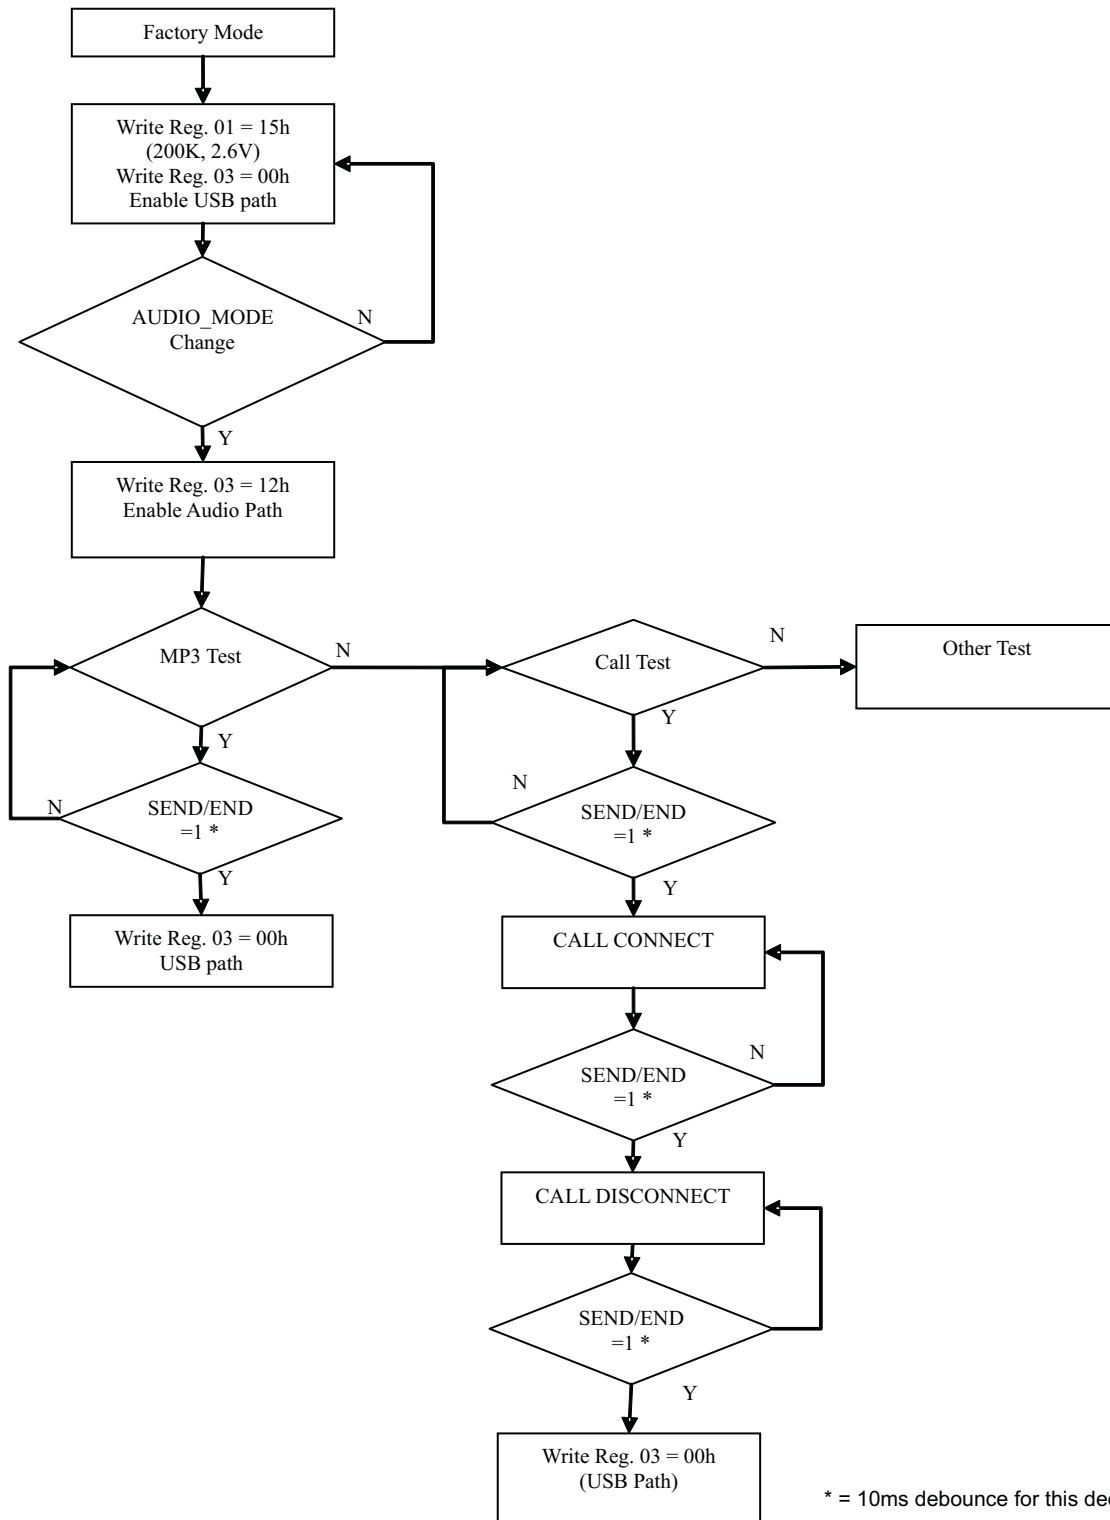

## I<sup>2</sup>C Register Map

| ADDRESS (xxh) | NAME       | TYPE | RESET VALUE             | b7                       | b6      | b5       | b4     | b3            | b2      | b1      | b0          |
|---------------|------------|------|-------------------------|--------------------------|---------|----------|--------|---------------|---------|---------|-------------|
| 0             | Device ID  | R    | TBD                     | VENDOR ID BITS (TI=0001) |         |          |        | REVISION BITS |         |         |             |
| 1             | Control 1  | R/W  | X0000000                | RFU                      | ID_2P2  | ID_620   | ID_200 | VLDO          | SEMREN  | ADC_EN  | CP_EN       |
| 2             | Control 2  | R/W  | 0000XX01                | INTPOL                   | INT_EN  | MIC_LP   | CP_AUD | RFU           | RFU     | CHG_TYP | USB_DET_DIS |
| 3             | SW Control | R/W  | See <sup>(1)</sup>      | RFU                      | MIC_ON  | DP[2:0]  |        |               | DM[2:0] |         |             |
| 4             | INT_Status | R    | 00000000 <sup>(1)</sup> | CHGDET                   | MR_COMP | SEND/END | VBUS   | IDNO[3: 0]    |         |         |             |
| 5             | Status     | R    | 00XXXXXX                | DCPORT                   | CHPORT  | RFU      | RFU    | RFU           | RFU     | RFU     | RFU         |

(1) Refer INT\_Status

### Slave Address

| NAME          | SIZE (BITS) | DESCRIPTION |       |       |       |       |       |       |       |
|---------------|-------------|-------------|-------|-------|-------|-------|-------|-------|-------|
|               |             | Bit 7       | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
| Slave address | 8           | 1           | 0     | 0     | 0     | 1     | 0     | 0     | R/W   |

## Register Descriptions

### Device ID

Address: 00H  
Reset Value: N/A  
Type: Read

| NAME      | SIZE (BITS) | DESCRIPTION                                                                                                            |
|-----------|-------------|------------------------------------------------------------------------------------------------------------------------|
| Device ID | 8           | A unique number for chip version<br>00000000<br>bits 0–3 = chip revision, bits 4–7 = Vendor ID (TI = 1xh, Maxim = 2xh) |

### Control 1

Address: 01H  
Reset Value: x0000000  
Type: Read/Write

| NAME   | SIZE (BITS) | DESCRIPTION                                                                                                       |
|--------|-------------|-------------------------------------------------------------------------------------------------------------------|
| ID_2P2 | 1           | 0: 2.21 kΩ switch open<br>1: Connect LDO to ID through 2.21 kΩ external resistor                                  |
| ID_620 | 1           | 0: 620 Ω switch open<br>1: Connect LDO to ID through 620 Ω internal resistor (used for video)                     |
| ID_200 | 1           | 0: 200 kΩ switch open<br>1: Connect LDO to ID through 200 kΩ internal resistor                                    |
| VLDO   | 1           | 0: LDO voltage = 2.6 V (if manual switching mode)<br>1: LDO voltage = 2.3 V (if manual switching mode)            |
| SEMREN | 1           | 0: Disable send/end and MIC removal comparators and LDO<br>1: Enable send/end and MIC removal comparators and LDO |

| NAME   | SIZE (BITS) | DESCRIPTION                                       |
|--------|-------------|---------------------------------------------------|
| ADC_EN | 1           | 0: ADC and LDO disabled<br>1: ADC and LDO enabled |
| CP_EN  | 1           | 0: charge pump disabled<br>1: charge pump enabled |

## Control 2

Address: 02H

| ADDRESS (xxh) | NAME      | TYPE | b7     | b6     | b5     | b4     | b3  | b2  | b1      | b0          |
|---------------|-----------|------|--------|--------|--------|--------|-----|-----|---------|-------------|
| 2             | Control 2 | R/W  | INTPOL | INT_EN | MIC_LP | CP_AUD | RFU | RFU | CHG_TYP | USB_DET_DIS |
| Reset Value   |           |      | 0      | 0      | 0      | 0      | X   | X   | 0       | 1           |

| NAME        | SIZE (BITS) | DESCRIPTION                                                                                                     |
|-------------|-------------|-----------------------------------------------------------------------------------------------------------------|
| INT_POL     | 1           | 0: Interrupt polarity = active low<br>1: interrupt polarity = active high                                       |
| INT_EN      | 1           | 0: All interrupts disabled (masked)<br>1: All interrupts enabled                                                |
| MIC_LP      | 1           | 0: Low power mode - MIC power pulsing disabled<br>1: Low power mode - MIC power pulsing enabled                 |
| CP_AUD      | 1           | 0: Click/pop resistors on AUDIO_L and AUDIO_R disabled<br>1: Click/pop resistors on AUDIO_L and AUDIO_R enabled |
| CHG_TYP     | 1           | 0: Charger type detection disabled<br>1: Charger type detection enabled                                         |
| USB_DET_DIS | 1           | 0: USB detection enabled<br>1: USB detection disabled                                                           |

## SW\_Control

Address: 03H

| ADDRESS (xxh) | NAME       | TYPE | b7  | b6     | b5                 | b4 | b3 | b2                 | b1 | b0 |
|---------------|------------|------|-----|--------|--------------------|----|----|--------------------|----|----|
| 03            | SW Control | R/W  | RFU | MIC_ON | DP[2:0]            |    |    | DM[2:0]            |    |    |
| Reset Value   |            |      | X   | 0      | See <sup>(1)</sup> |    |    | See <sup>(1)</sup> |    |    |

(1) The reset value depends on V<sub>BUS</sub> status at powerup. If V<sub>BUS</sub> presents, the default value depends on DSS pin state (refer Default Switch Position session). If V<sub>BUS</sub> does not present, the default value is 111b (DM/DP switch is open).

| NAME   | SIZE (BITS) | DESCRIPTION                                                                                                                            |
|--------|-------------|----------------------------------------------------------------------------------------------------------------------------------------|
| MIC_ON | 1           | 0: MIC switching path open<br>1: MIC switching path connected to ID line                                                               |
| DP     | 3           | 000: DP connected to USB_DP<br>001: DP connected to UART_TX<br>010: DP connected to AUDIO_R<br>011: Future Use (right Audio for Video) |

| NAME | SIZE (BITS) | DESCRIPTION                                                                                                                                                              |
|------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DM   | 3           | 000: DM connected to USB_DM<br>001: DM connected to UART_RX<br>010: DM connected to AUDIO_L<br>011: Future Use (left Audio for Video)<br>100–111: DM switching path open |

**INT\_Status**

Address: 04H

| ADDRESS (xxh) | NAME       | TYPE | b7     | b6      | b5       | b4   | b3                 | b2 | b1 | b0 |
|---------------|------------|------|--------|---------|----------|------|--------------------|----|----|----|
| 04            | INT_Status | R    | CHGDET | MR_COMP | SEND/END | VBUS | IDNO[3:0]          |    |    |    |
| Reset Value   |            |      | 0      | 0       | 0        | 0    | See <sup>(1)</sup> |    |    |    |

(1) ADC value of the ID pin

| NAME             | SIZE (BITS) | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|------------------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CHGDET           | 1           | 0: High-current charger not detected<br>1: High-current charger detected                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| MR_COMP          | 1           | 0: MIC removal comparator low<br>1: MIC removal comparator high                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| SEND/END         | 1           | 0: ID line not grounded<br>1: ID line grounded (send/end button pressed)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| V <sub>BUS</sub> | 1           | 0: No power detected on V <sub>BUS</sub><br>1: Power detected on V <sub>BUS</sub>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| IDNO             | 1           | 0000: ADC determined ID impedance = 0 Ω (grounded)<br>0001: ADC determined ID impedance = 24 kΩ<br>0010: ADC determined ID impedance = 56 kΩ<br>0011: ADC determined ID impedance = 100 kΩ<br>0100: ADC determined ID impedance = 130 kΩ<br>0101: ADC determined ID impedance = 180 kΩ<br>0110: ADC determined ID impedance = 240 kΩ<br>0111: ADC determined ID impedance = 330 kΩ<br>1000: ADC determined ID impedance = 430 kΩ<br>1001: ADC determined ID impedance = 620 kΩ<br>1010: ADC determined ID impedance = 910 kΩ<br>1011: ADC determined ID impedance = open |

**Status**

Address: 05H

| ADDRESS (xxh) | NAME   | TYPE | b7     | b6     | b5  | b4  | b3  | b2  | b1  | b0  |
|---------------|--------|------|--------|--------|-----|-----|-----|-----|-----|-----|
| 5             | Status | R    | DCPORT | CHPORT | RFU | RFU | RFU | RFU | RFU | RFU |
| Reset Value   |        |      | 0      | 0      | X   | X   | X   | X   | X   | X   |

| NAME   | SIZE (BITS) | DESCRIPTION                                                          |
|--------|-------------|----------------------------------------------------------------------|
| DCPORT | 1           | 0: Dedicated charger not detected<br>1: Dedicated charger detected   |
| CHPORT | 1           | 0: Charging host port not detected<br>1: Charging host port detected |

## Power Consumption

### Operating Modes Summary (with estimated power consumption)

|                          | BAND GAP | UVLO | I <sup>2</sup> C | DETECTION PLUG | Z DETECTION | CHARGE PUMP | CHARGE PUMP (LOW CURRENT) | TOTAL I <sub>CC</sub> (μA) |
|--------------------------|----------|------|------------------|----------------|-------------|-------------|---------------------------|----------------------------|
| Audio                    | ON       | ON   | ON               | ON             | ON          | ON          | OFF                       | 59                         |
| Audio (no active signal) | ON       | ON   | ON               | ON             | ON          | OFF         | ON                        | 14                         |
| UART                     | ON       | ON   | ON               | ON             | ON          | OFF         | OFF                       | 9                          |
| USB                      | ON       | ON   | ON               | ON             | ON          | ON          | OFF                       | 59                         |
| Travel Adapter           | ON       | ON   | ON               | ON             | OFF         | OFF         | OFF                       | 8                          |
| IDLE                     | ON       | ON   | ON               | ON             | OFF         | OFF         | OFF                       | 8                          |
| Sleep                    | OFF      | OFF  | OFF              | OFF            | OFF         | OFF         | OFF                       | 0                          |
| I <sub>CC</sub> (μA)     | 3        | 2    | 1                | 2              | 1           | 50          | 5                         |                            |

## PARAMETER MEASUREMENT INFORMATION

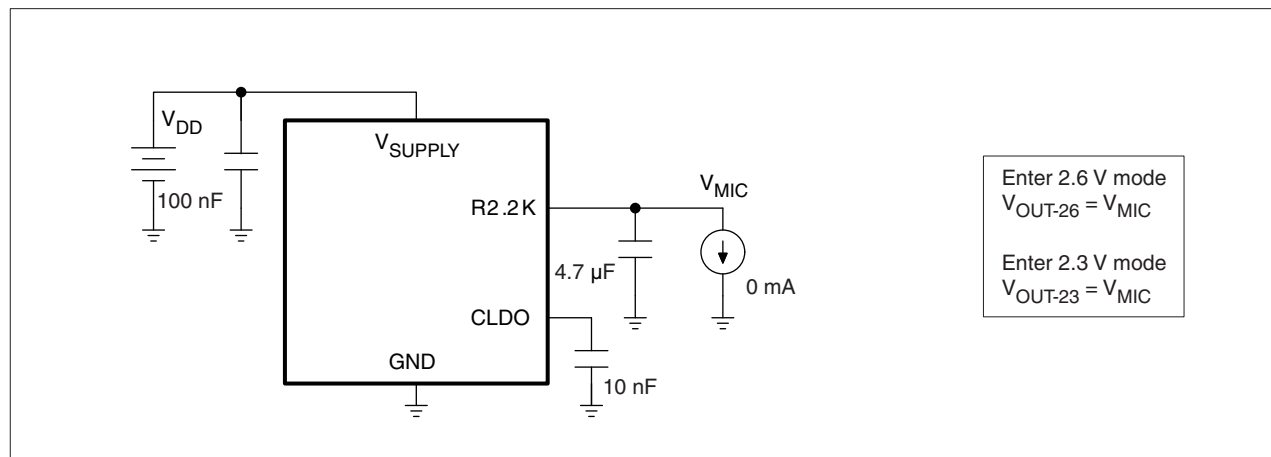


**Figure 2. LDO Output Voltage**

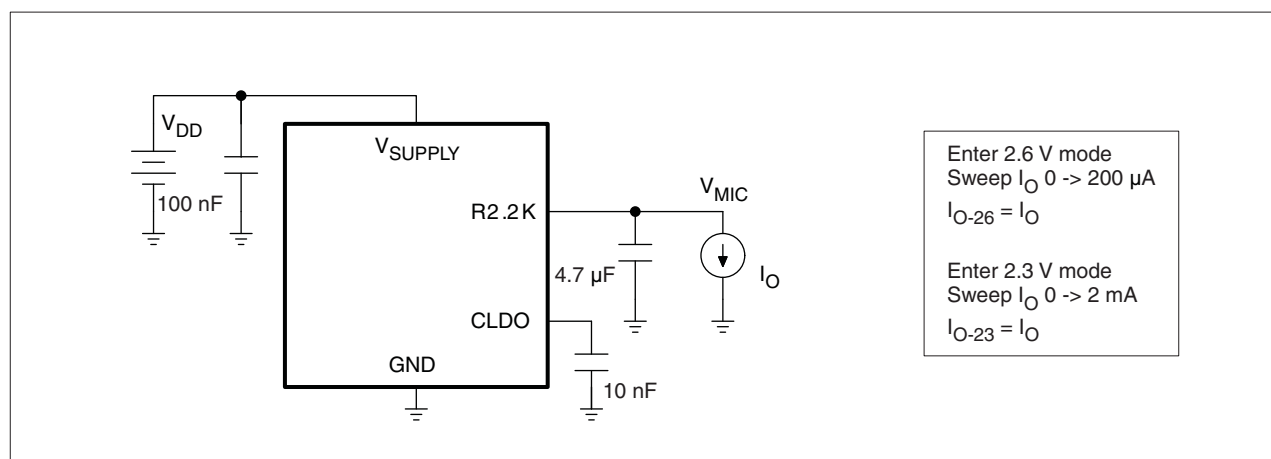


**Figure 3. Max Output Current**

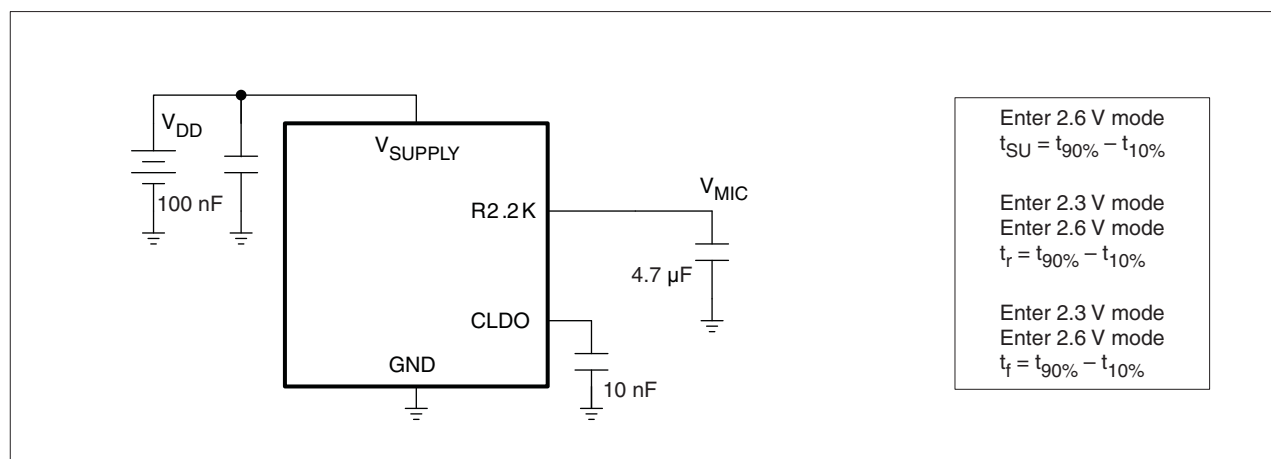


**Figure 4. LDO Rise/Fall Time**

A.  $I_O$  can be set with a resistor.

## PARAMETER MEASUREMENT INFORMATION (continued)

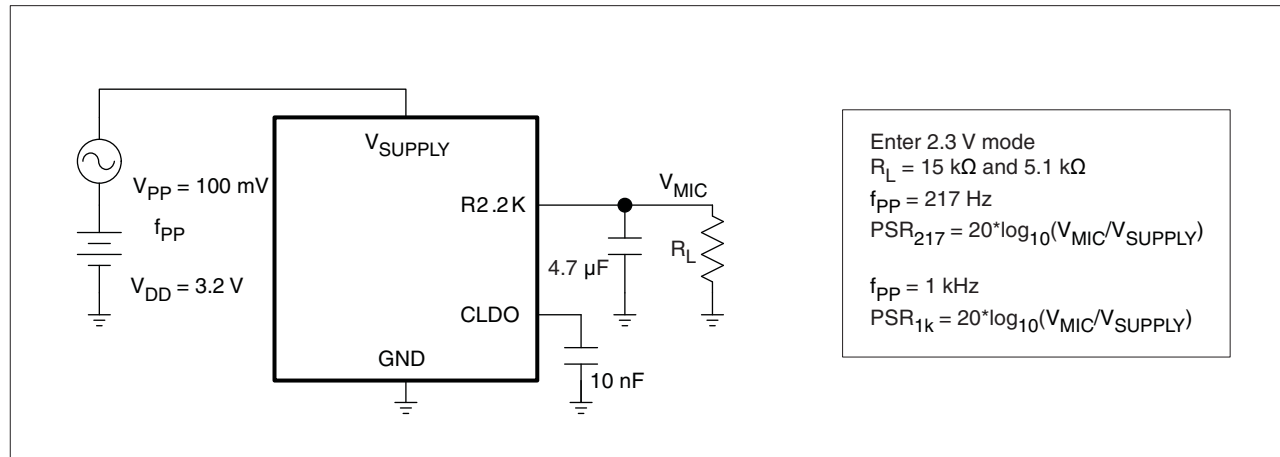


Figure 5. Power Supply Rejection

B.  $V_{MIC}$  should be  $V_{2.2K}$ ; add 200 pF on  $V_{SUPPLY}$  in LDO output noise.

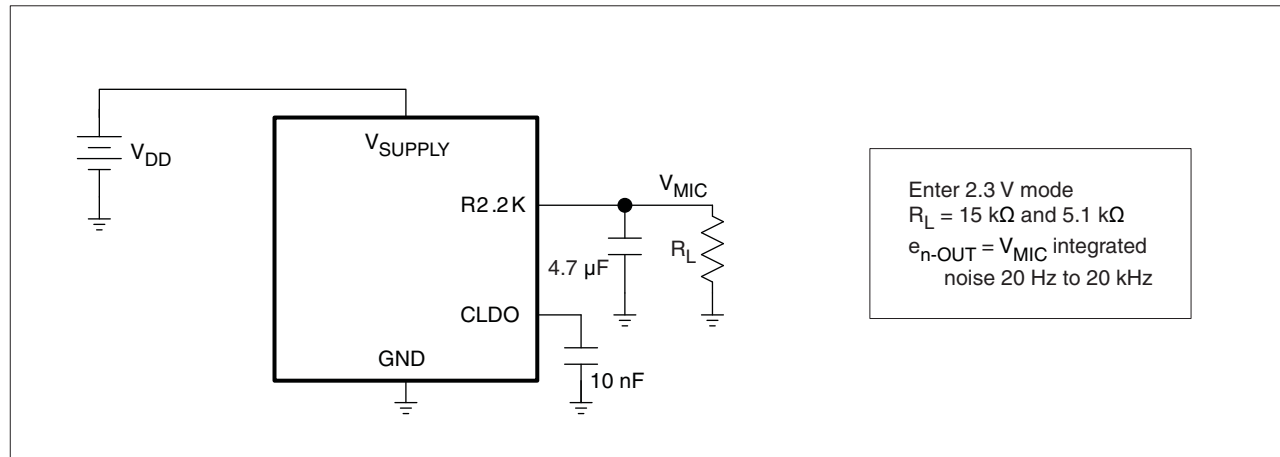


Figure 6. Integrated Output Noise

**PACKAGING INFORMATION**

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup>    | Lead/<br>Ball Finish | MSL Peak Temp <sup>(3)</sup> | Samples<br>(Requires Login)          |
|------------------|-----------------------|--------------|-----------------|------|-------------|----------------------------|----------------------|------------------------------|--------------------------------------|
| TS5USBA43402YZPR | ACTIVE                | DSBGA        | YZP             | 20   | 3000        | Green (RoHS<br>& no Sb/Br) | Call TI              | Level-1-260C-UNLIM           | <a href="#">Request Free Samples</a> |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.


**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

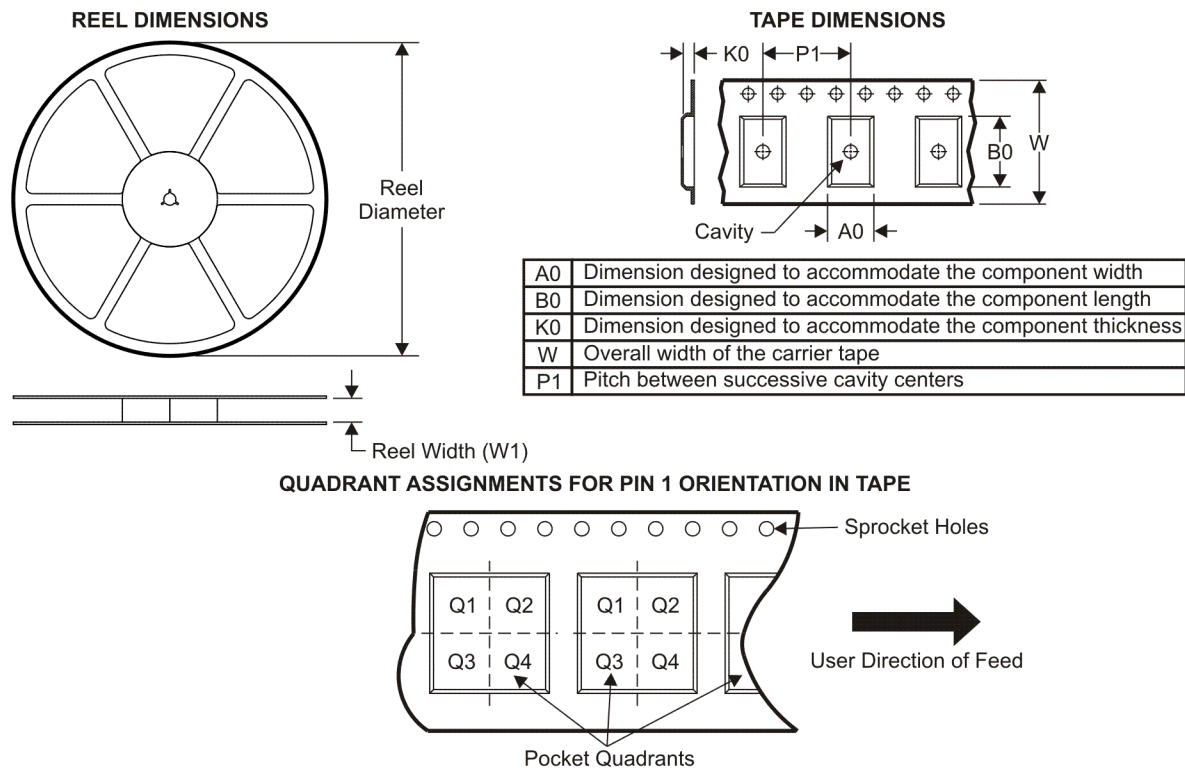**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

| Device           | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|------------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TS5USBA43402YZPR | DSBGA        | YZP             | 20   | 3000 | 180.0              | 8.4                | 2.02    | 2.52    | 0.63    | 4.0     | 8.0    | Q1            |

## TAPE AND REEL BOX DIMENSIONS

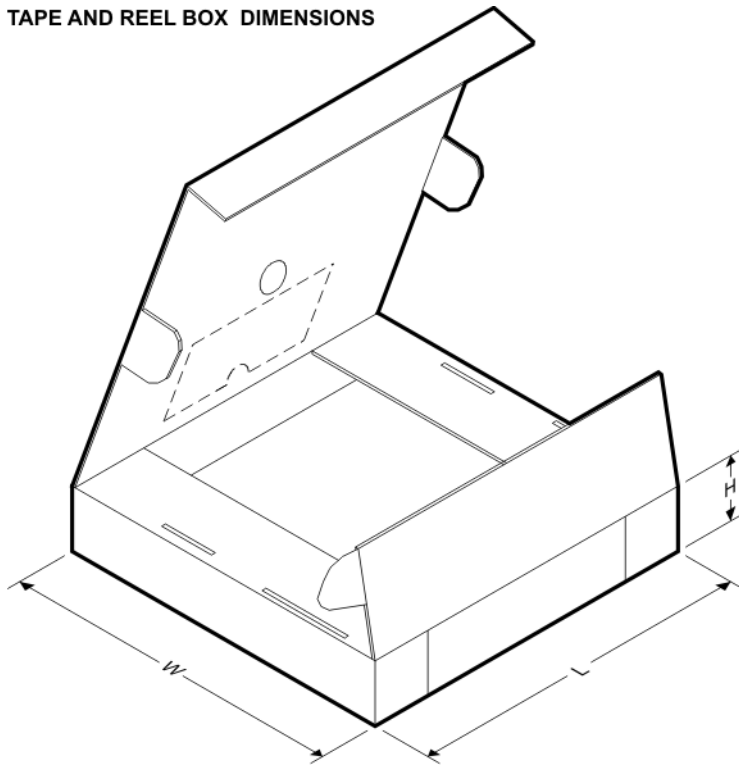

\*All dimensions are nominal

| Device           | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|------------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TS5USBA43402YZPR | DSBGA        | YZP             | 20   | 3000 | 220.0       | 220.0      | 34.0        |

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

| Products                    |                                                                    | Applications               |                                                                                          |
|-----------------------------|--------------------------------------------------------------------|----------------------------|------------------------------------------------------------------------------------------|
| Amplifiers                  | <a href="http://amplifier.ti.com">amplifier.ti.com</a>             | Audio                      | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                                   |
| Data Converters             | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>     | Automotive                 | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>                         |
| DLP® Products               | <a href="http://www.dlp.com">www.dlp.com</a>                       | Communications and Telecom | <a href="http://www.ti.com/communications">www.ti.com/communications</a>                 |
| DSP                         | <a href="http://dsp.ti.com">dsp.ti.com</a>                         | Computers and Peripherals  | <a href="http://www.ti.com/computers">www.ti.com/computers</a>                           |
| Clocks and Timers           | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>           | Consumer Electronics       | <a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>                   |
| Interface                   | <a href="http://interface.ti.com">interface.ti.com</a>             | Energy                     | <a href="http://www.ti.com/energy">www.ti.com/energy</a>                                 |
| Logic                       | <a href="http://logic.ti.com">logic.ti.com</a>                     | Industrial                 | <a href="http://www.ti.com/industrial">www.ti.com/industrial</a>                         |
| Power Mgmt                  | <a href="http://power.ti.com">power.ti.com</a>                     | Medical                    | <a href="http://www.ti.com/medical">www.ti.com/medical</a>                               |
| Microcontrollers            | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a> | Security                   | <a href="http://www.ti.com/security">www.ti.com/security</a>                             |
| RFID                        | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>               | Space, Avionics & Defense  | <a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a> |
| RF/IF and ZigBee® Solutions | <a href="http://www.ti.com/lprf">www.ti.com/lprf</a>               | Video and Imaging          | <a href="http://www.ti.com/video">www.ti.com/video</a>                                   |
|                             |                                                                    | Wireless                   | <a href="http://www.ti.com/wireless-apps">www.ti.com/wireless-apps</a>                   |