

NOTES: UNLESS OTHERWISE SPECIFIED
1. INTERFACE COMPLIANT TO SMPTE 304 SPECIFICATION.

2. MATERIAL SPECIFICATIONS:
CONTACTS AND TRI-LOC BODY: COPPER ALLOY
ALIGNMENT PINS: BRASS PER ASTM B16
CRIMP SLEEVE: PHOS. BRONZE
O-RINGS AND STRAIN RELIEF: SILICONE RUBBER
ALL PLASTIC PARTS: 20% GLASS FILLED POLYPROPYLENE
ALL OTHER METAL PARTS: 303 STAINLESS STEEL PER ASTM A582

3. FINISH SPECIFICATIONS:
STAINLESS STEEL PARTS: PASSIVATE
TRI-LOC BODY: .000100 MIN NICKEL PER AMS-QQ-N-290
OVER COPPER FLASH PER ASTM B734 (RoHS)
CONTACTS: .000100 MIN GOLD PER ASTM B488 OVER
.000080 MIN NICKEL PER AMS-QQN-290 (RoHS)
CRIMP SLEEVE: .000100 MIN NICKEL PER AMS-QQ-N-290 OVER
COPPER FLASH PER ASTM B734 (RoHS)

4. ELECTRICAL SPECIFICATIONS:
LOW VOLTAGE CONTACTS: 42 - 60 VAC, 1 AMP
AUX ELECTRICAL CONTACTS: 600 VAC, 10 AMP

5. ENVIRONMENTAL:
OPERATING TEMPERATURE RATING: -40°C TO 75°C
NON-OPERATING/STORAGE TEMPERATURE RATING: -40°C TO 85°C
HUMIDITY: <95 RH (AT 40°C)

6. OPTICAL:
WAVELENGTH: 1100nm - 1350nm
INSERTION LOSS: 0.3dB TYPICAL, 0.5dB MAX
RETURN LOSS: > -45dB, -50dB TYPICAL

7. REPLACEMENT KITS:
CONTACT KIT: 7760-000-00708Z
CONTACT KIT WITH CARTRIDGE: 7760-000-00710Z




8. CABLE PREPARATION AND STRIPPING PROCEDURE: CAP-E05.

9. OPTIONAL ENVIRONMENTAL BOOT 7760-000-00704Z SOLD SEPARATELY.

10. RED LDPE DUST CAP INCLUDED (NOT SHOWN)

11. CRIMP TOOLING:
FOR FACTORY APPLICATION USE HAND TOOL KTH-1000 AND DIE KTH-2035
FOR FIELD APPLICATION USE HAND TOOL KTH-5000 AND DIE KTH-5018

REV	DESCRIPTION	BY DATE	APPD
05	REVISED DRAWING PER ER30231	KFC 01/07/10	XXX

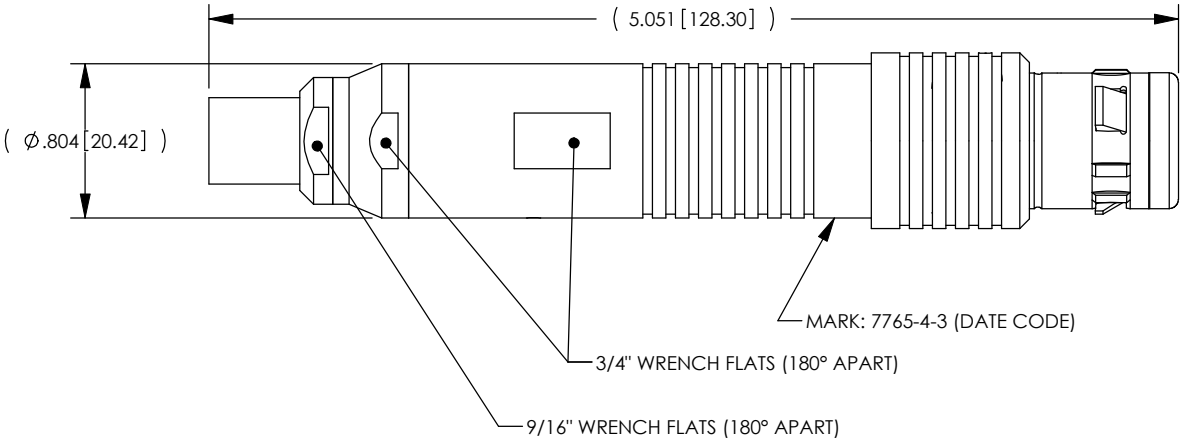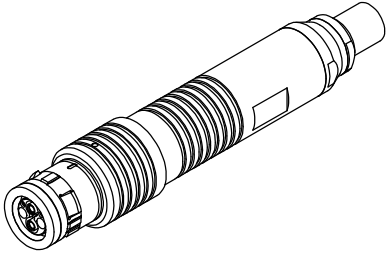


CATALOG P/N: 7765-4-3

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX [X.X] ± .01 [0.3] .XXX [X.XX] ± .005 [0.13] .XXXX [X.XXX] ± .XXXX ANGLES: ± 2° SCALE: 1:1				KINGS by WINCHESTER Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492			
CUSTOMER SALES DRAWING				TRI-LOC, SMPTE 304, PLUG PRE-POLISHED			
DRAWN PSM	DATE 04/06/10	APPROVED WPM	DATE 04/07/10	A SD7765-4-3			
APPROVED XXX	DATE XX/XX/XX	APPROVED XXX	DATE XX/XX/XX				
				SHT 1	OF 2	REV 05	

REPLACEMENT COMPONENT ORDERING NUMBERS

REV	DESCRIPTION	BY DATE	APPD
05	REVISED DRAWING PER ER30231	KFC 01/07/11	XXX

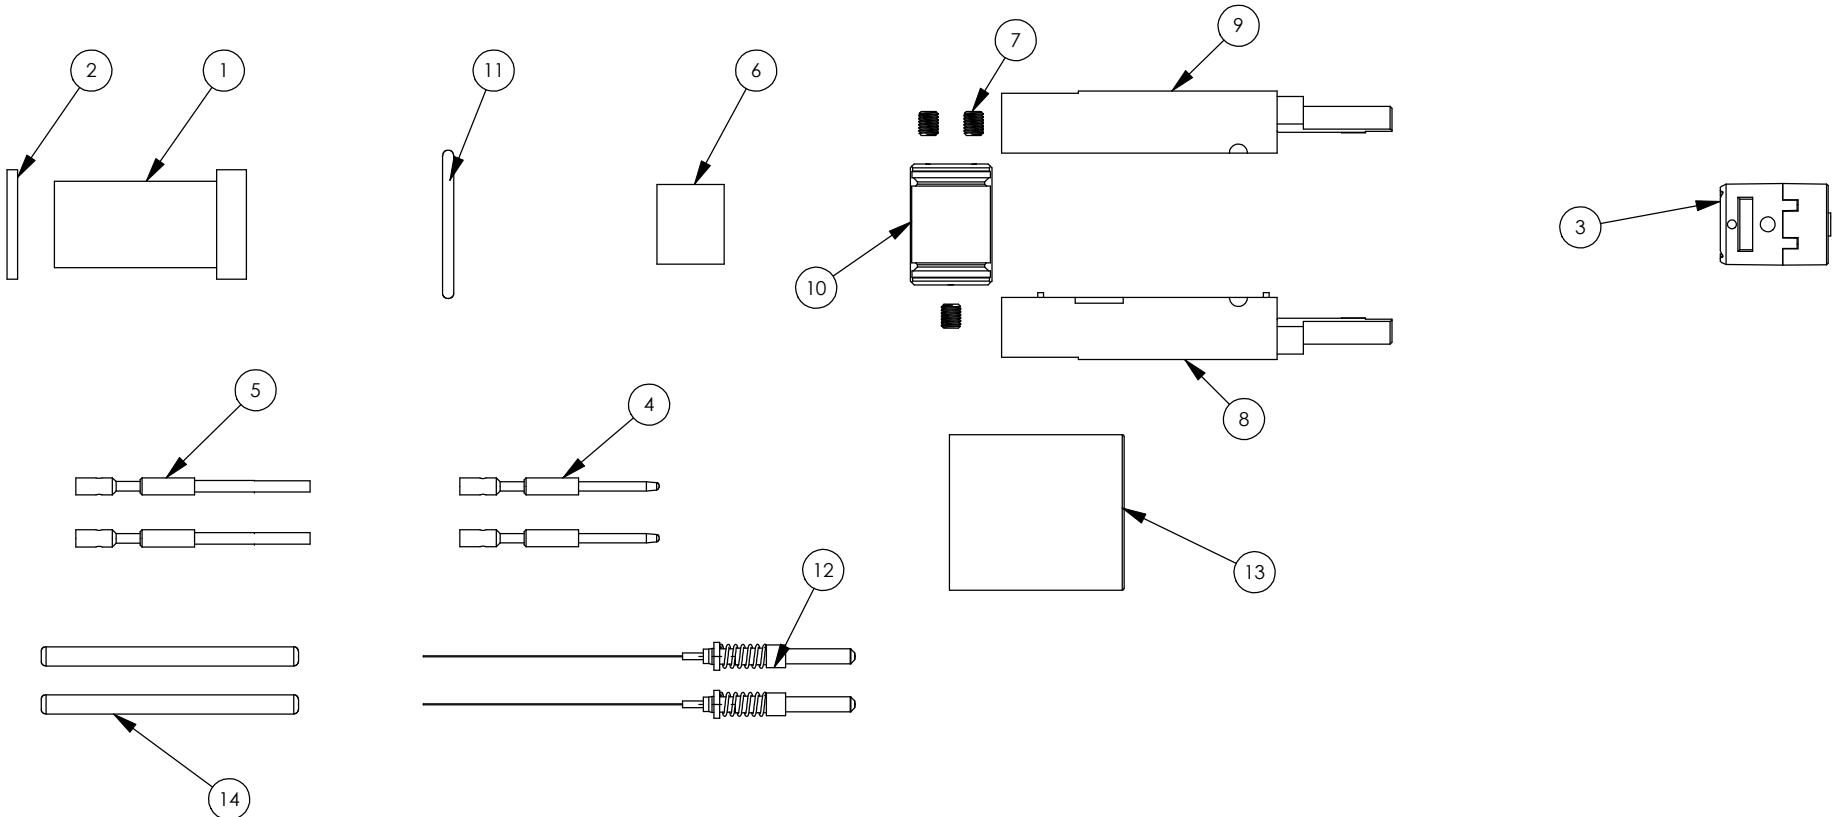

14	VNFPS01-900-34	SPLICE PROTECTOR SLEEVE, 34MM	50
13	VNSC-3-4U	RED LDPE DUST CAP, .750" ID	25
12	7760-000-00711Z	FIBER OPTIC CONNECTOR STUB	2
11	78-0705U	REAR O-RING	25
10	78-1012U	STRENGTH MEMBER SUPPORT CLAMP	10
9	78-3013U	PLUG INSULATOR HALF SIDE "A"	25
8	78-3012U	PLUG INSULATOR HALF SIDE "B"	25
7	78-0102U	#4-40 HEX SET SCREW	10
6	1-8156U	CRIMP SLEEVE (CABLE SHIELD FERRULE)	25
5	78-4006U	PLUG FEMALE CRIMP CONTACT	50
4	78-4005U	PLUG MALE CRIMP CONTACT	50
3	78-7003U	PLUG CARTRIDGE ASSEMBLY	10
2	78-0301U	WASHER FOR REAR CABLE SEAL	25
1	78-0701U	REAR CABLE SEAL	25
ITEM NO.	PART NO.	Description	New Ferrule Design/QTY.
PLATING CODE(S)			

CATALOG P/N: 7765-4-3

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX [X.X] ± .01 [0.3] .XXX [X.XX] ± .005 [0.13] .XXXX [X.XXX] ± .XXXX ANGLES: ± 2° SCALE: 1:1				 by WINCHESTER Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492			
CUSTOMER SALES DRAWING				TRI-LOC, SMPTE 304, PLUG PRE-POLISHED			
DRAWN PSM	DATE 04/06/10	APPROVED WPM	DATE 04/07/10	A			
APPROVED XXX	DATE XX/XX/XX	APPROVED XXX	DATE XX/XX/XX				
SD7765-4-3				SHT 2	OF 2	REV 05	