


Data sheet | Item number: 787-1216

Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage;
4.2 A output current; DC-OK LED


www.wago.com/787-1216

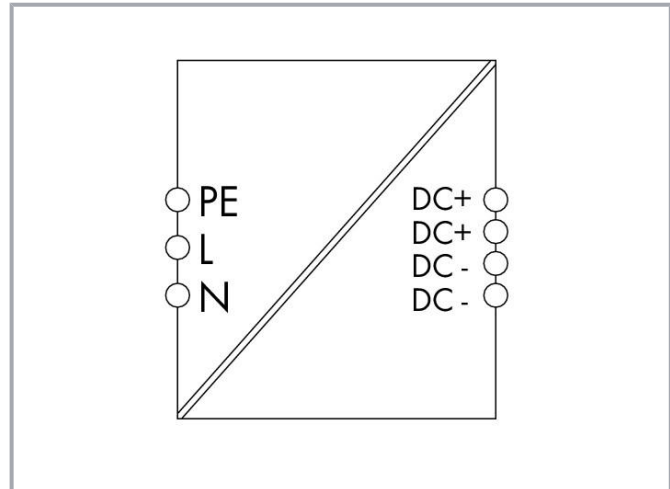

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Item description

Features:

- Switched-mode power supply
- Stepped profile for installation in standard distribution boards
- Screw mounts for alternative installation in distribution boxes or devices
- Pluggable *picoMAX*[®] Connection Technology (tool-free)
- Suitable for both parallel and series operation
- Electrically isolated output voltage (SELV) per EN 60335-1 and UL 60950-1; PELV per EN 60204

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Data

Technical data

Power loss P_I	$\leq 0.7 \text{ W}$ (230 VAC; No load)
Power loss (max.) $P_{I(\max)}$	15 W (100 VAC / 24 VDC; 4.2 A)
Efficiency (typ.)	90 % (230 VAC); 87 % (110 VAC)
Nominal output voltage $U_{o \text{ nom}}$	DC 24 V (SELV)
Output voltage range	DC 22 ... 26 V (adjustable)
Default setting	DC 24 V
Nominal output current $I_{o \text{ nom}}$	4.2 A; 3.3 A (< 110 VAC)
Nominal output power	100 W
Control deviation	$\leq 1 \%$
Deviation, dynamic load change 10 ... 90 %	$\leq 1 \%$
Residual ripple	$\leq 100 \text{ mV}$ (peak-to-peak)
Overload behavior	Constant power (in overload range: $1.05 \dots 1.35 \times I_{o \text{ nom}}$); Shutdown and automatic restart in the event of a short circuit or permanent overload
Isolation voltage (Pri.-Sec.)	DC 4.242 kV
Protection class	I
Protection type	IP20 (per EN 60529)
Resistance to reverse feed	$\leq \text{DC } 35 \text{ V}$
Pollution degree	2
Transient suppression (primary)	Varistor
Overvoltage protection; secondary	$\leq 31 \text{ VDC}$ (in the event of a fault)
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	Yes
MTBF	> 500,000 h (per IEC 61709)
Internal fuse	T 3.15 A / 500 VAC
Required backup fusing	An external DC fuse is required for the DC input voltage.
Recommended backup fusing	Circuit breaker: 6 A (C characteristic), 10 A (B characteristic) or higher
Phases	1
Nominal input voltage $U_{i \text{ nom}}$	1 x AC 100 ... 240 V
Input voltage range	AC 85 ... 264 V; DC 125 ... 375 V

Subject to changes. Please also observe the further product documentation!



Input voltage derating	-2 %/V (< 100 VAC); -1.33 %/V (< 140 VDC)
Nominal mains frequency range	47 ... 63 Hz; 0 Hz
Input current I_i	≤ 2.5 A
Discharge current	≤ 0.25 mA
Inrush current	≤ 20 A
Power factor	≥ 0.5
Power factor correction (PFC)	Passive
Mains failure hold-up time	≥ 50 ms
Signaling	1 x LED DC OK (green)
Operation status indicator	Green LED (U_o)

Connection data

Connection type (1)	Input/Output
Connection technology	Push-in CAGE CLAMP®
WAGO Connector	<i>picoMAX</i> ® 5.0, WAGO 2092 Series
Solid conductor	0.2 ... 2.5 mm² / 24 ... 12 AWG
Fine-stranded conductor	0.2 ... 2.5 mm² / 24 ... 12 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inch

Physical data

Width	108 mm / 4.252 inch
Height	90 mm / 3.543 inch
Depth	56 mm / 2.205 inch
Depth from upper edge of DIN-rail	52.5 mm / 2.067 inch
Note (dimensions)	Depth: 48 mm (without cover)

Mechanical data

Mounting type	DIN-35 rail Screw mount (back/side)
---------------	--

Material data

Flammability class per UL94	V0
Weight	456.9 g

Subject to changes. Please also observe the further product documentation!



Environmental requirements

Surrounding air temperature (operation)	-25 ... 70 °C
Surrounding air temperature (storage)	-40 ... 85 °C
Relative humidity	95% (no condensation permissible)
Derating	-2.66 %/K (> 55 °C)

Standards and specifications

Conformity marking	CE
Standards/Specifications	EN 61204-3 EN 60335-1 EN 62368-1 UL 60950-1 UL 508

Commercial data

PU (SPU)	1 Stück
Packaging type	box
Country of origin	CN
GTIN	4055143907804
Customs tariff number	85044082900

Approvals / Certificates

UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc.	UL 508	E255817
	UL Underwriters Laboratories Inc.	UL 60950-1	E255815

Optional accessories

Tool

Operating tool

Subject to changes. Please also observe the further product documentation!



Item no.: 210-769
SCREWDRIVER; green

www.wago.com/210-769



Item no.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

www.wago.com/210-720

Ferrule

Ferrule



Item no.: 216-203
Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red

www.wago.com/216-203



Item no.: 216-202
Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray

www.wago.com/216-202



Item no.: 216-204
Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; black

www.wago.com/216-204



Item no.: 216-201
Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; white

www.wago.com/216-201



Item no.: 216-301
Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated; yellow

www.wago.com/216-301



Item no.: 216-302
Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated; green

www.wago.com/216-302

Strain relief

Strain relief plate



Item no.: 2092-1601
Gripping plate; light gray

www.wago.com/2092-1601

Downloads

Documentation

Manual

COMPACT Power; 1-phase DC 24 V / 4.2 A	V 1.0.0 2020. 11. 24.	pdf 1.6 MB	Download
---	--------------------------	---------------	----------

Bid Text

787-1216 docx - Datei	2019. 6. 12.	docx 21.2 kB	Download
--------------------------	--------------	-----------------	----------

787-1216 X81 - Datei	2019. 7. 4.	xml 7.4 kB	Download
-------------------------	-------------	---------------	----------

Instruction Leaflet

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Data sheet | Item number: 787-1216

www.wago.com/787-1216



Primär getaktete Stromversorgungen COMPACT
DC 24 V, 4,2 A

pdf
1.6 MB

[Download](#)

Additional Information

Disposal; Electrical and electronic equipment, Packaging

V 1.0.0

pdf
265.8 kB

[Download](#)

CAD/CAE-Data

CAE data

EPLAN Data Portal 787-1216

[URL](#)

[Download](#)

WSCAD Universe 787-1216

[URL](#)

[Download](#)

ZUKEN Portal 787-1216

[URL](#)

[Download](#)

CAD data

2D/3D Models 787-1216

[URL](#)

[Download](#)

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 787-1216

[URL](#)

[Download](#)

Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage; 4.2 A output current; DC-OK LED

Installation Notes

Product family

EPSITRON COMPACT Power

EPSITRON® COMPACT POWER: Compact, High-Performance Power Supplies

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.