RF Agile Transceiver

Data Sheet

AD9361

FEATURES

RF 2 × 2 transceiver with integrated 12-bit DACs and ADCs
Band: 70 MHz to 6.0 GHz
Supports TDD and FDD operation
Tunable channel BW: <200 kHz to 56 MHz
Dual receivers: 6 differential or 12 single-ended inputs
Superior receiver sensitivity with a noise figure < 2.5 dB
RX gain control
- **Real-time monitor and control signals for manual gain**
- **Independent automatic gain control**

Dual transmitters: 4 differential outputs
Highly linear broadband transmitter
- **TX EVM: ≤−40 dB**
- **TX noise: ≤−157 dBm/Hz noise floor**
- **TX monitor: ≥66 dB dynamic range with 1 dB accuracy**


Integrated fractional-N synthesizers
- **2.5 Hz maximum local oscillator (LO) step size**

Multichip synchronization
CMOS/LVDS digital interface

APPLICATIONS

Point to point communication systems
Femtocell/picocell/microcell base stations
General-purpose radio systems

FUNCTIONAL BLOCK DIAGRAM

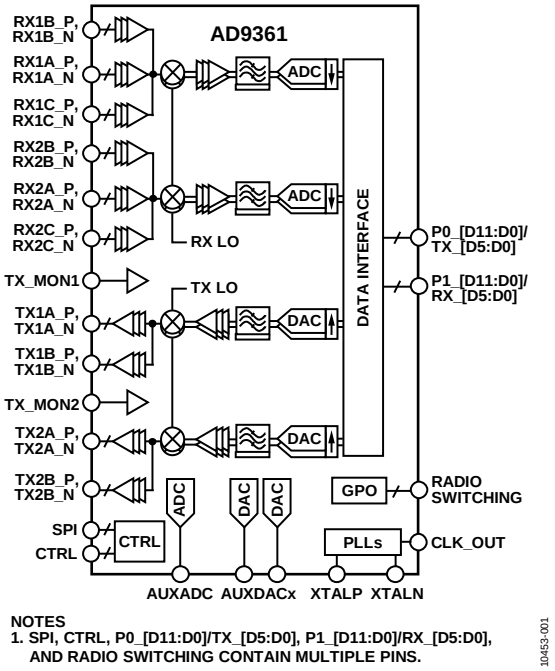

NOTES
1. SPI, CTRL, P0_[D11:D0]/TX_[D5:D0], P1_[D11:D0]/RX_[D5:D0], AND RADIO SWITCHING CONTAIN MULTIPLE PINS.

10453-001

Figure 1.

GENERAL DESCRIPTION

The AD9361 is a high performance, highly integrated RF Agile Transceiver™ designed for use in 3G and 4G base station applications. Its programmability and wideband capability make it ideal for a broad range of transceiver applications. The device combines an RF front end with a flexible mixed-signal baseband section and integrated frequency synthesizers, simplifying design-in by providing a configurable digital interface to a processor. The AD9361 operates in the 70 MHz to 6.0 GHz range, covering most licensed and unlicensed bands. Channel bandwidths from less than 200 kHz to 56 MHz are supported.

The two independent direct conversion receivers have state-of-the-art noise figure and linearity. Each receive (RX) subsystem includes independent automatic gain control (AGC), dc offset correction, quadrature correction, and digital filtering, thereby eliminating the need for these functions in the digital baseband. The AD9361 also has flexible manual gain modes that can be externally controlled. Two high dynamic range ADCs per channel digitize the received I and Q signals and pass them through configurable decimation filters and 128-tap FIR filters to produce a 12-bit output signal at the appropriate sample rate.

The transmitters use a direct conversion architecture that achieves high modulation accuracy with ultralow noise. This transmitter design produces a best in class TX EVM of <−40 dB, allowing significant system margin for the external PA selection. The on-board transmit (TX) power monitor can be used as a power detector, enabling highly accurate TX power measurements.

The fully integrated phase-locked loops (PLLs) provide low power fractional-N frequency synthesis for all receive and transmit channels. Channel isolation, demanded by frequency division duplex (FDD) systems, is integrated into the design. All VCO and loop filter components are integrated.

The core of the AD9361 can be powered directly from a 1.3 V regulator. The IC is controlled via a standard 4-wire serial port and four real-time I/O control pins. Comprehensive power-down modes are included to minimize power consumption during normal use. The AD9361 is packaged in a 10 mm × 10 mm, 144-ball chip scale package ball grid array (CSP_BGA).

To access the complete data sheet, download the design support package from the AD9361 product page.

Rev. SpC **Document Feedback**
Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.
Tel: 781.329.4700 **©2012–2013 Analog Devices, Inc. All rights reserved.**
Technical Support **www.analog.com**

NOTES

©2012–2013 Analog Devices, Inc. All rights reserved. Trademarks and registered trademarks are the property of their respective owners.
D10453F-0-9/13(SpC)