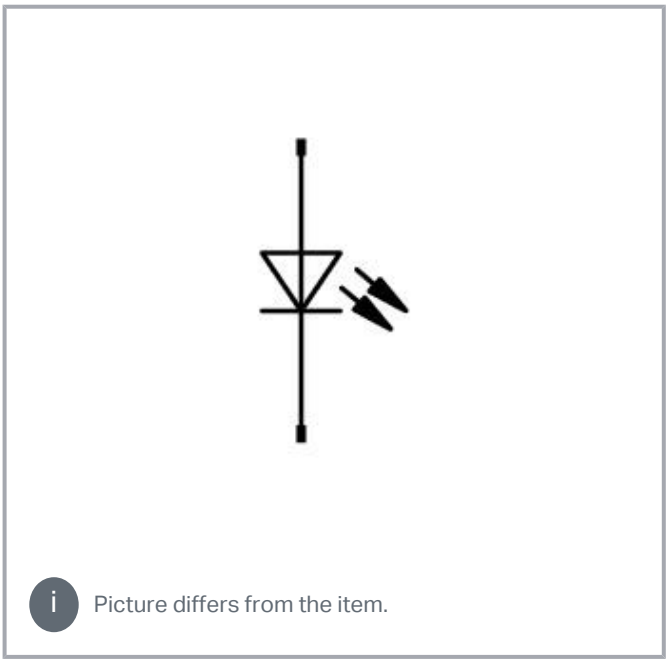


Data
Notes

Note	Only required when using relays without integrated status indicator!

Technical data

Operating data

Nominal operating voltage	AC 115 V
Power consumption at U_N	1.7 mA

Signaling

Status indicator	Red LED

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Safety and protection

Protection type	IP20

Mechanical data

Mounting type	Pluggable module

Material data

Fire load	0.03 MJ
Weight	1.6 g

Commercial data

Product Group	6 (Interface Electronics)
PU (SPU)	50 (25) Stück
Packaging type	box
Country of origin	CN
GTIN	4045454389499
Customs tariff number	85318070000

Downloads

Documentation

Bid Text

788-124 docx - Datei	2019. 2. 20.	docx 15.4 kB	Download
788-124 X81 - Datei	2019. 2. 19.	xml 2.6 kB	Download

Additional Information

Disposal; Electrical and electronic equipment, Packaging	V 1.0.0	pdf 265.8 kB	Download

CAD/CAE-Data

CAE data

WSCAD Universe 788-124	URL	Download

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

ZUKEN Portal 788-124	URL	Download
EPLAN Data Portal 788-124	URL	Download

CAD data

2D/3D Models 788-124	URL	Download

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 788-124 Accessories for relay modules; Operation status indicator: red	URL	Download

Installation Notes

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com