

FEATURES


- Maximum output current
 I_{OM} : 0.1A
- Output voltage
 V_O : 8V
- Continuous total dissipation
 P_D : 0.5 W

SOT-89-3L


1. OUT

2. GND


3. IN



SOT-89 PACKAGE OUTLINE

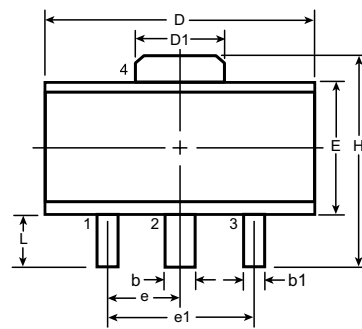

Top View



Side View

Symbol	A	b	b1	C	D	D1	E	E1	e	e1	H	L
Dimensions (mm)	MIN	1.40	0.44	0.36	0.3	4.40	1.50	2.29	2.00*	1.50 BSC	3.94	0.89
	NOM	-	-	-	-	-	-	-	-	3.00 BSC	-	-
	MAX	1.60	0.56	0.48	0.5	4.60	1.75	2.60	2.29	-	4.25	1.20

Dimensions in mm

ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)


Parameter	Symbol	Value	Units
Input Voltage	V_I	30	V
Operating Junction Temperature Range	T_{OPR}	0~+150	°C
Storage Temperature Range	T_{STG}	-55~+150	°C

78L08

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ($V_i=14V$, $I_o=40mA$, $C_i=0.33\mu F$, $C_o=0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions		Min	Typ	Max	Unit
Output voltage	V_o		25°C	7.7	8.0	8.3	V
		$10.5V \leq V_i \leq 23V$, $I_o=1mA \sim 40mA$	0-125°C	7.6	8.0	8.4	V
		$I_o=1mA \sim 70mA$		7.6	8.0	8.4	V
Load Regulation	ΔV_o	$I_o=1mA \sim 100mA$	25°C		18	80	mV
		$I_o=1mA \sim 40mA$	25°C		10	40	mV
Line regulation	ΔV_o	$10.5V \leq V_i \leq 23V$	25°C		42	175	mV
		$11V \leq V_i \leq 23V$	25°C		36	125	mV
Quiescent Current	I_q		25°C		4	6	mA
Quiescent Current Change	ΔI_q	$11V \leq V_i \leq 23V$	0-125°C			1.5	mA
	ΔI_q	$1mA \leq I_o \leq 40mA$	0-125°C			0.1	mA
Output Noise Voltage	V_N	$10Hz \leq f \leq 100KHz$	25°C		54		μV
Ripple Rejection	RR	$13V \leq V_i \leq 23V, f=120Hz$	0-125°C	37	46		dB
Dropout Voltage	V_d		25°C		1.7		V


TYPICAL APPLICATION

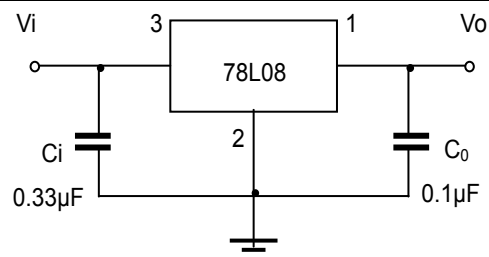


Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

RATING AND CHARACTERISTIC CURVES (78L08)


Output Characteristics

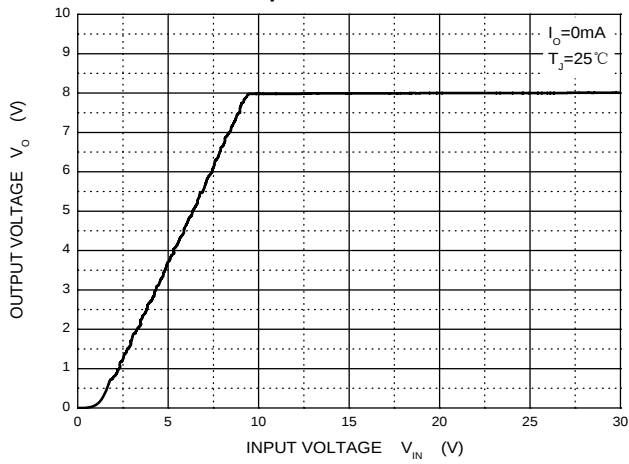


Dropout Characteristics

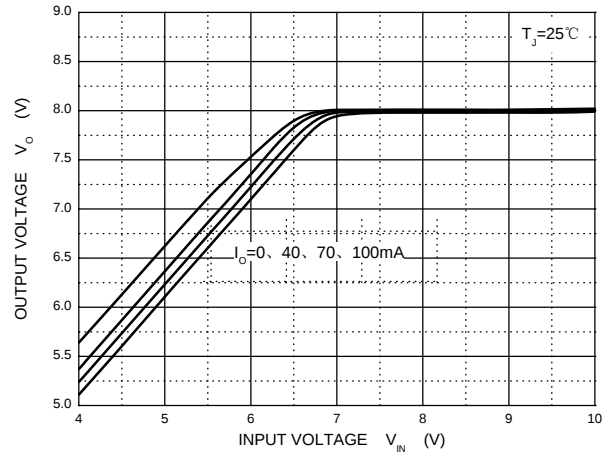


Quiescent Current vs Input Voltage

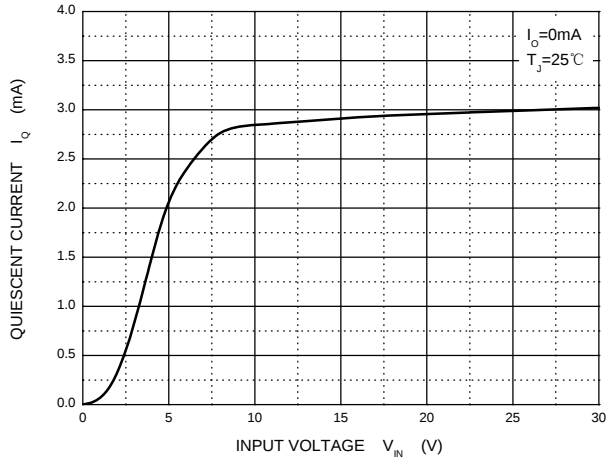

Current Cut-off Grid Voltage

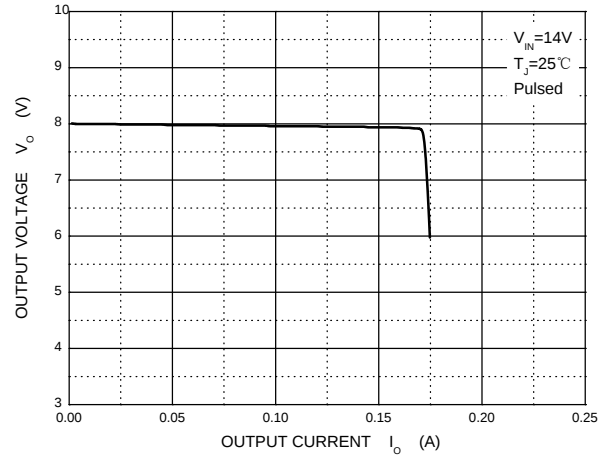

Output Voltage vs Junction Temperature

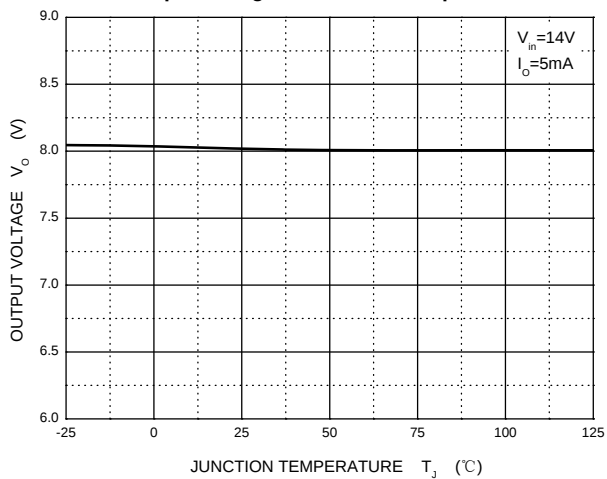

Power Derating Curve

