


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .
© COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
G	14				H	ADDED -24 PER 0G3A-0416-00	20JUN00	JR/TM

AMP WIRE RANGE	 Listed	 LR7189 Certified
12-10 AWG SOLID OR STRANDED	12-10 AWG SOLID OR STRANDED	12-10 AWG SOLID OR STRANDED

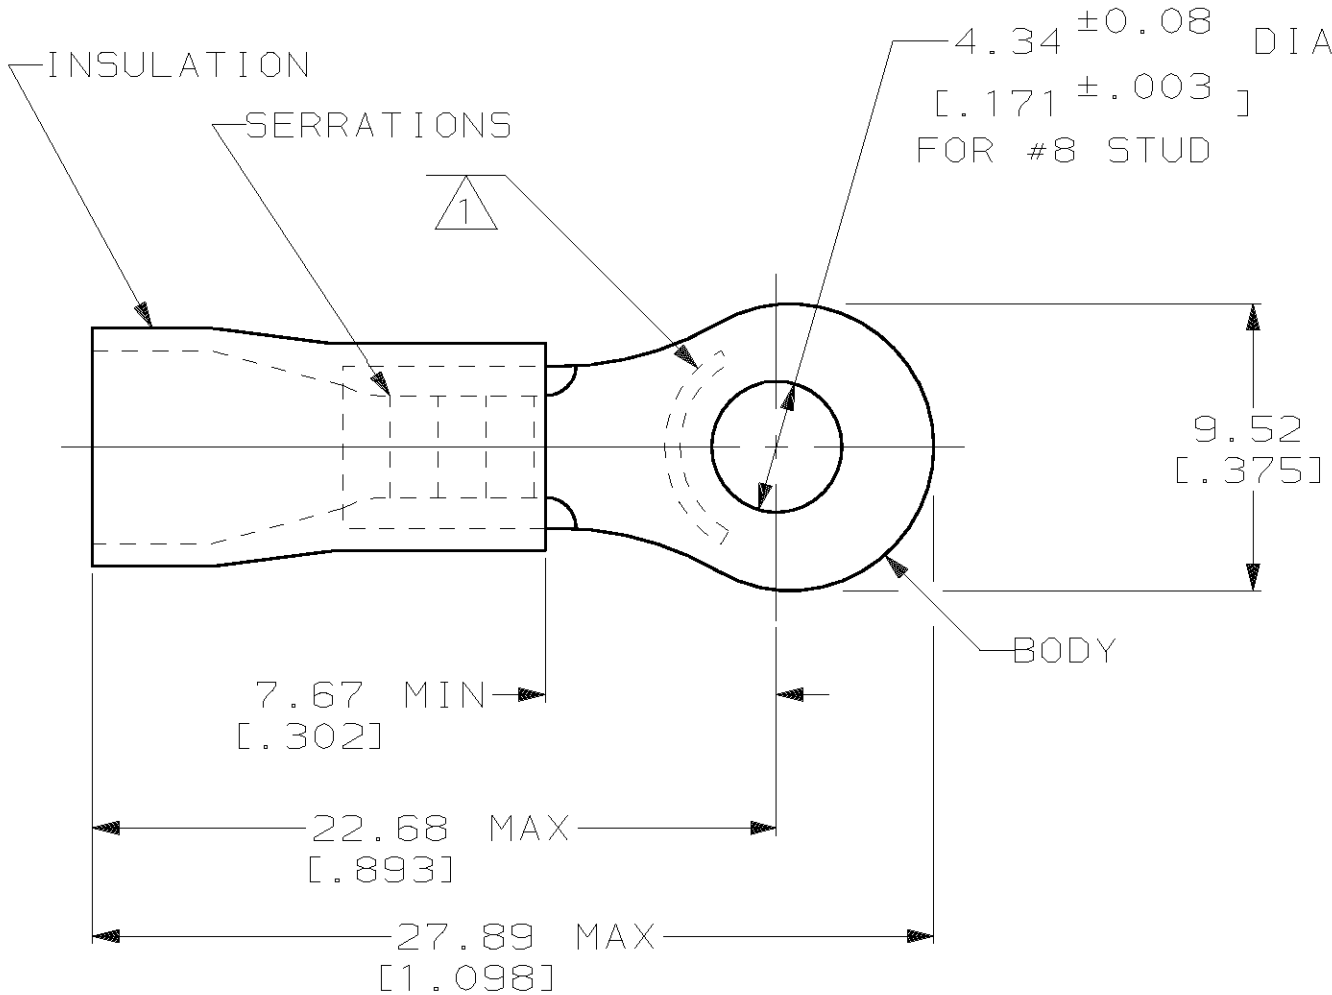

- 1 STAMP AMP 12-10* APPROX AS SHOWN
2 WIRE INSULATION DIA: .150-.250
3 TONGUE MATERIAL THK: 1.02±0.05 [0.040±0.002]
4 PRELIMINARY - NOT FOR PREPRODUCTION

QUANTITY	PACKAGE TYPE	PART NO
25	LOOSE PIECE, BAG	8-34853-5
4	LOOSE PIECE, BLS	8-34853-4
100	LOOSE PIECE, BOX	8-34853-1
1000	ON TAPE, REEL	2-34853-4
5000	ON TAPE, REEL	2-34853-1
-	LOOSE PIECE	34853

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS			MAX RECOMMENDED OPERATING TEMPERATURE: 90°C MAX				QUANTITY		PACKAGE TYPE		PART NO			
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752		VOLTAGE RATING: NOT APPLICABLE	CIRCULAR MIL AREA: 2.62-6.64mm² [5,180-13,100] SOLID OR STRANDED	DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± 0.20[.008] 3 PLC DEC ± - ANGLES ± -		DR 08/06/92 DK SCHRUM		 AMP Incorporated Harrisburg, PA 17105-3608					
					CHK 11/10/92 RE HERSEY									
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111				MATERIAL COPPER PER ASTM B-152 PVC COLOR: YELLOW		APPD 11/10/92 ML ELLIS		NAME TERMINAL, RING TONGUE, PLASTI-GRIP™					
				FINISH TIN PLATE PER MIL-T-10727		APPD 11/10/92 M BARNABA								
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.					PRODUCT SPEC 108-1034		SIZE 		CAGE CODE 00779		DRAWING NO C-34853	
							APPLICATION SPEC NOT AVAILABLE		SCALE 4:1		SHEET 1 OF 1			
							WEIGHT -							