


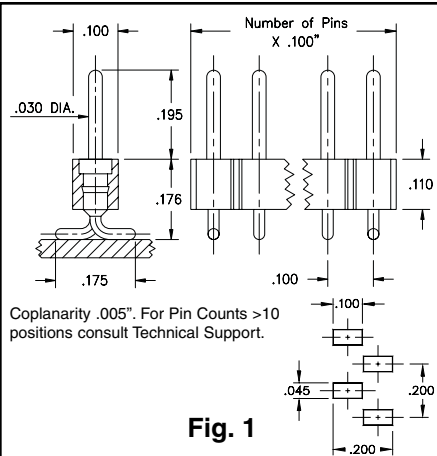


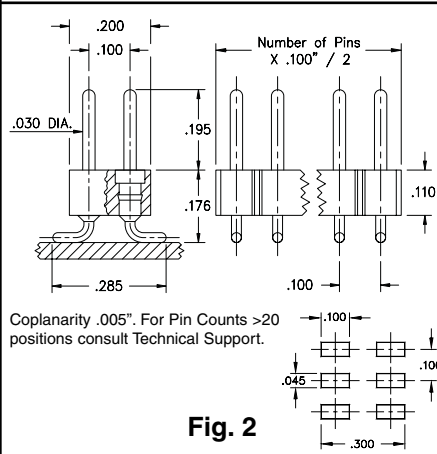

- Series 800 & 802 use MM #7007 pins. See page 182 for details.
- Series 801 & 803 use MM #1304 receptacles and accept pin diameters from .025"-.037" and .025" square pins. See page 148 for details.
- Receptacles use Hi-Rel, 6 finger BeCu #47 contact rated at 4.5 amps. See page 221 for details.
- Insulators are high temp. thermoplastic.

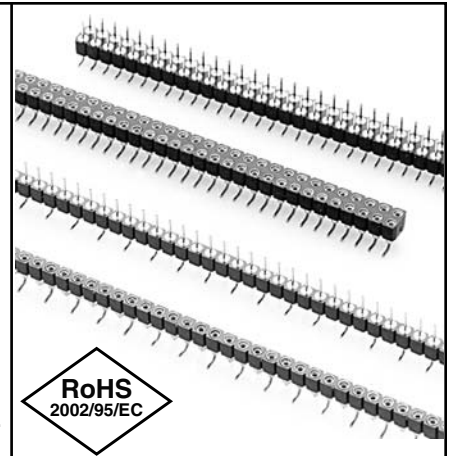

Ordering Information	
Fig. 1	800...001 Single Row Surface Mount Header
	800-10-0__-30-001000 Specify # of pins → 03-64
Fig. 2	802...001 Double Row Surface Mount Header
	802-10-0__-30-001000 Specify # of pins → 04-72

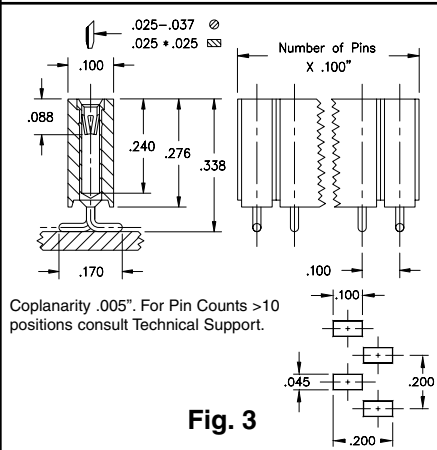

<i>For Electrical, Mechanical & Environmental Data, See pg. 4</i>		<i>For RoHS compliance select ◇ plating code.</i>	
PLATING CODE =		10◇	
Pin Plating		10μ" Au	
Fig. 3	801...001 Single Row Surface Mount Socket	801-43-0__-30-001000	
	Specify # of pins	→ 03-50	
Fig. 4	803...001 Double Row Surface Mount Socket	803-XX-__-30-001000	
	Specify # of pins	→ 004-100	
<i>For Electrical, Mechanical & Environmental Data, See pg. 4</i>		<i>XX=Plating Code See Below</i>	
		<i>For RoHS compliance select ◇ plating code.</i>	
SPECIFY PLATING CODE XX=		93	43◇
Sleeve (Pin)		200μ" Sn/Pb	200μ" Sn
Contact (Clip)		30μ" Au	30μ" Au