




Data Sheet



Product Category: RF SAW Filter

Part Number	Package	Application	Last Modified
802-RF858.5M-A	3.0 x 3.0 SMD	Wireless	Mar. 10, 2007

TYPE :

Low Loss RF SAW Filter for Wireless Communication



PART NUMBER :




802-RF858.5M-A

OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

PARAMETERS	Condition	Minimum	Typical	Maximum	Units
Center Frequency (Fo)	-	-	858.5	-	MHz
Maximum Insertion Loss	851.0~ 866.0 MHz	-	2.2	3.5	dB
Stop Band Attenuation:	DC~ 806.0 MHz	45	55	-	dB
	806.0~ 821.0 MHz	40	50	-	
	896.0~ 902.0MHz	28	34	-	
	905.825~ 924.825 MHz	27	39	-	
	960.0~ 979.0 MHz	37	53	-	
	1070.0~ 1089.0 MHz	47	51	-	
	1089.0~ 3000.0 MHz	27	32	-	
Source Impedance (single ended)*	-	-	50	-	ohm
Load Impedance (single ended)*	-	-	50	-	ohm
VSWR	851.0~ 866.0 MHz	-	1.6	2.0	-
Amplitude Ripple	851.0~ 866.0 MHz	-	0.6	1.5	dBp-p
Maximum DC Voltage	-	-	-	5	V
Group Delay Ripple	851.0~ 866.0 MHz	-	15	40	nsp-p
Maximum Input Power	-	-	-	15	dBm
Operating Temperature	-	-30	-	+70	°C


* No Matching Network(Ref. Testing Enviroment Circuit as shown below)

PACKAGE OUTLINE (mm)

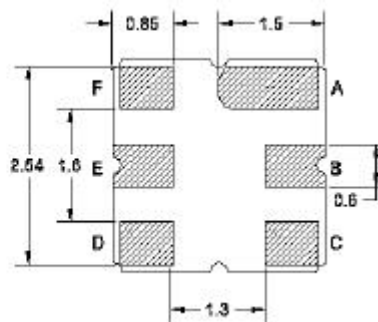



PIN LAYOUT	
A	Ground
B	Out
C	Ground
D	Ground
E	In
F	Ground

TEST FIXTURE


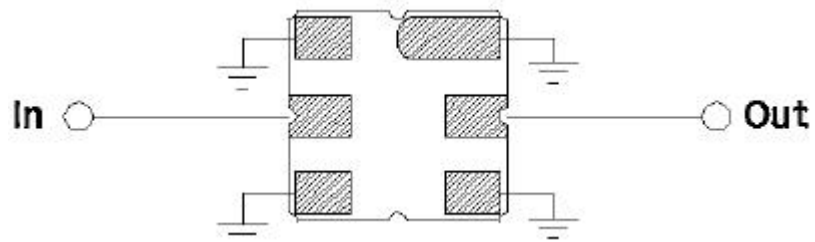


Load/ Source Impedance = 50 ohms



FREQUENCY RESPONSE

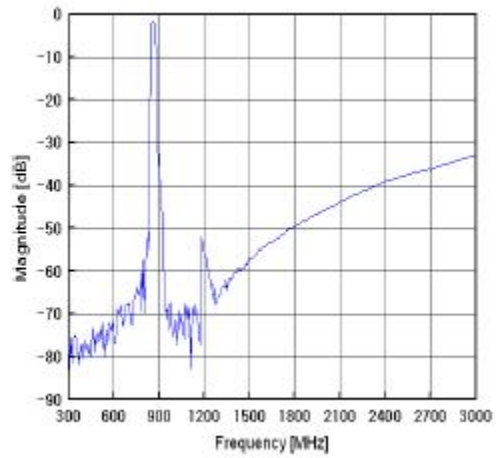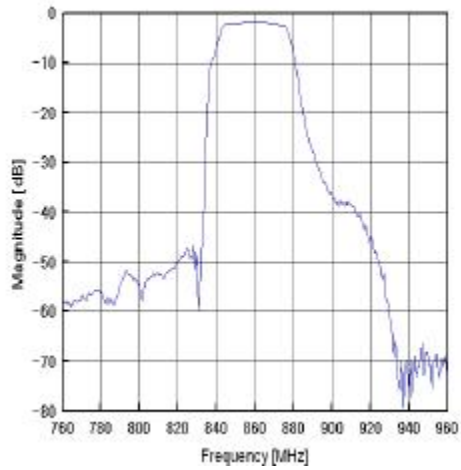

VSWR

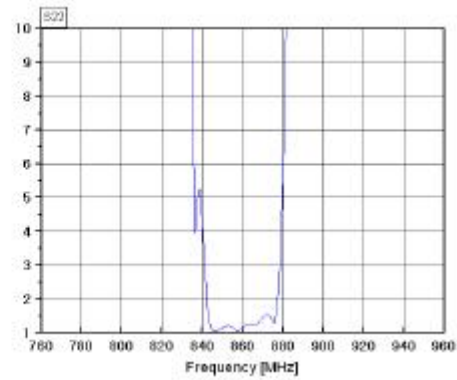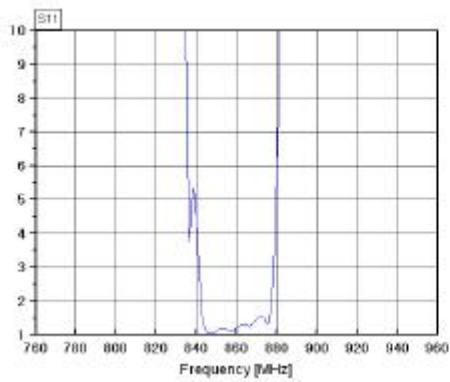

SMITH CHART

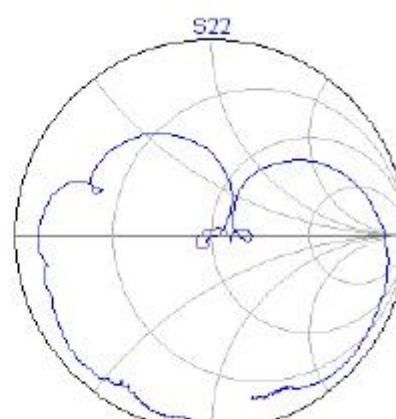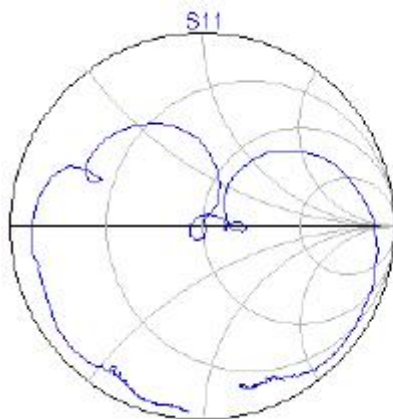

Oscilent Corporation - CALL **949.252.0522**

18195 East McDermott Street , Building D , Irvine , CA 92614 , USA
Fax: 949.252.0599 , E-Mail: Sales@Oscilent.com

Part No.: [802-RF858.5M-A](#)

[Crystal Oscillators](#) | [Quartz Crystal](#) | [TCXO](#) | [VCXO](#) | [IF SAW Filter](#) | [RF SAW Filter](#) | [Ceramic Resonator](#)
[Crystal Filter](#) | [Ceramic Filter](#) | [SAW Filter / SAW Devices](#) | [Site Map](#)