

Evaluation Module for LM5069EVM-627 with Surge Stopper and Reverse Voltage Protection

This user's guide describes the evaluation module (EVM) for the LM5069. The LM5069 is a positive high voltage hotswap/inrush current controller with power limiting.

Contents

1	Introduction	2
	1.1 Features	2
	1.2 Applications	2
2	Board Description	3
3	Theory of Operation	3
4	Board Connection/Setup and Probe Cautions	4
5	Circuit Parameter Changes	5
	5.1 Current Limit	5
	5.2 Power Limit	5
	5.3 Insertion Time	5
	5.4 Fault Detection and Restart	5
	5.5 UVLO/OVLO Input Voltage Thresholds	6
	5.6 Surge Clamping	9
	5.7 Shutdown	9
	5.8 Power Good Output	10
	5.9 Reverse Hookup Protection	10
6	Performance Characteristics Plots	10
	6.1 Reverse Polarity Input	10
	6.2 Insertion Time Delay	11
	6.3 Fault Timeout	11
	6.4 Restart Timing	12
	6.5 Turn-on Sequence with No Load Current	12
	6.6 Turn-on Sequence with 1-A Load Current	13
	6.7 Output Shutdown Using UVLO Pin	13
	6.8 Input Surge	14
	6.9 Inrush Current	15
7	Schematic	17
8	PCB Layout	18
9	Bill of Materials (BOM)	20

List of Figures

1	Power Up Using Power Limit and Current Limit	4
2	Fault Timeout and Restart Sequence	6
3	UVLO, OVLO Inputs (Option A)	7
4	UVLO, OVLO Inputs (Option B)	8
5	Minimum UVLO Threshold, Adjustable OVLO	9
6	Reverse Polarity Input	10
7	Insertion Timer Delay	11
8	Fault Timeout	11
9	Restart Timing	12

10	Turn-on Sequence with No Load Current	12
11	Turn-on Sequence with 1-A Load Current	13
12	Output Shutdown Using UVLO Pin	13
13	Output Shutdown Using UVLO Pin	14
14	Input Surge (Not Clamped)	14
15	Input Surge (Clamped)	15
16	Inrush Current with 2550- μ F Output Capacitor	15
17	Inrush Current with 4900- μ F Output Capacitor	16
18	LM5069EVM-627 Schematic	17
19	Top Side Placement	18
20	Top Layer	18
21	Bottom Layer	19

List of Tables

1	Bill of Materials	20
---	-------------------------	----

1 Introduction

The LM5069EVM-627 provides the design engineer with a fully-functional hotswap controller board designed for surge clamping, reverse voltage protection and reverse current protect. This board contains an LM5069-2, the auto restart version of this IC. This user's guide describes the various functions of the board: how to test and evaluate it, and how to change the components for a specific application. For more information, view the *LM5069 Positive High Voltage Hot Swap / Inrush Current Controller with Power Limiting* ([SNVS452](#)) data sheet.

1.1 Features

- General board specifications include:
 - Input voltage range: -40 V to $+38\text{ V}$ maximum
 - Output voltage clamped: $+32\text{ V}$ maximum
 - Current limit: 2.5 A , $\pm 10\%$
 - Q1 power limit: 30 W
 - UVLO thresholds: 16 V , $\pm 4\%$ and 14 V , $\pm 3\%$
 - OVLO thresholds: 36 V , $\pm 2\%$ and 34 V , $\pm 3\%$
 - Insertion delay: 410 ms
 - Fault timeout period: 26 ms
 - Restart time: 5.3 seconds
 - Size: $4.0'' \times 1.8''$
- Reverse connection protection with diode D1
- Input surge clamping with TVS diode Z1
- Reverse current blocking from load with FET Q2
- FET SOA protection with resistor R9
- Optional FET Q3 for small input surge

1.2 Applications

- Automotive
- 24-V industrial systems
- General hot plug

2 Board Description

The schematic of LM5069EVM-627 is shown in [Figure 18](#). Input power is applied at J1 while J2 provides the output connection to the load. Slide switch SW1 provides a means to ENABLE and shutdown the hotswap circuit with UVLO protection. Capacitors C3 and C4 (100 μ F/50 V, Alum Electrolytic capacitor) represent capacitance which is typically present on the input of the load circuit and are present on this evaluation board so the turn-on characteristics of the LM5069 may be tested without having to connect a load.

The LM5069EVM-627 is supplied with pins 2–3 connected on JMP1, and pins 1–2 connected on JMP2.

3 Theory of Operation

The LM5069 provides intelligent control of the power supply connections of a load which is to be connected to a live power source. The three primary functions of this LM5069EVM-627 are reverse input voltage hookup, surge clamping and in-rush current limiting during turn-on, and reverse load current protection when pull out from power source. Additional functions include undervoltage lock-out (UVLO) and overvoltage lock-out (OVLO) to ensure the system input voltage is supplied to the load within a defined range, monitoring of the load current for faults during normal operation, power limiting in the series pass FET (Q1) during turn-on, and a power good logic output (PGD) to indicate the circuit status.

Upon applying the input voltage to the LM5069EVM-627 (for example, SW1 is switched on), Q1 is initially held off for the insertion delay (≈ 410 ms) to allow ringing and transients at the input to subside. At the end of the insertion delay, if the input voltage at VIN is between the UVLO and OVLO thresholds, Q1 is turned on in a controlled manner to limit the in-rush current, Q2 is also turned on controlled by GATE. If the in-rush current were not limited during turn-on, the current would be very high as the load capacitors (C3, C4) charge up, limited only by the surge current capability of the voltage source, and the wiring resistance (a few milliohms). That very high current could damage the edge connector, PC board traces, and possibly the load capacitors receiving the high current. Additionally, the dV/dt at the load's input is controlled to reduce possible EMI problems.

The LM5069EVM-627 protects from reverse connection with diode D1. When a reverse power source is connected, there will be no voltage at each pin of LM5069, as this diode can hold the reverse voltage in a range, and prevent destroying the IC.

The LM5069EVM-627 limits in-rush current to a safe level using a two-step process. In the first portion of the turn-on cycle, when the voltage differential across Q1 is highest, Q1's power dissipation is limited to a peak of 30 W by monitoring its drain current (the voltage across R5) and its drain-to-source voltage. Their product is maintained constant by controlling the drain current as the drain-to-source voltage decreases (as the output voltage increases). This is shown in the constant power portion of [Figure 1](#) where the drain current is increasing to ILIM. When the drain current reaches the current limit threshold (2.5 A), it is then maintained constant as the output voltage continues to increase. When the output voltage reaches the input voltage (VDS decreases to near zero), the drain current then reduces to a value determined by the load. Q1's gate-to-source voltage then increases to ≈ 12 V above the OUT voltage. The circuit is now in normal operation mode.

Monitoring of the load current for faults during normal operation is accomplished using the current limit circuit described previously. If the load current increases to 2.5 A (55 mV across R5), Q1's gate is controlled to prevent the current from increasing further. When current limiting takes effect, the fault timer limits the duration of the fault. At the end of the fault timeout period (≈ 26 ms) Q1 is shut off, denying current to the load. The LM5069-2 then initiates a restart every 5.3 seconds. The restart consists of turning on Q1 and monitoring the load current to determine if the fault is still present. After the fault is removed, the circuit powers up to normal operation at the next restart.

In a sudden overload condition (the output is shorted to ground), it is possible the current could increase faster than the response time of the current limit circuit. In this case, the circuit breaker sensor shuts off Q1's gate rapidly when the voltage across R5 reaches ≈ 105 mV. When the current reduces to the current limit threshold, the current limit circuitry then takes over.

The PGD logic level output is low during turn-on, and switches high when the output voltage at OUT has increased to within 1.25 V of the input voltage, signifying the turn-on procedure is essentially complete. If the OUT voltage decreases more than 2.5 V below VIN due to a fault, PGD switches low. The high level voltage at PGD can be any appropriate voltage up to +80 V, and can be higher or lower than the voltages at VIN and OUT.

The UVLO and OVLO thresholds are set by resistors R1–R3. The UVLO and OVLO thresholds are reached when the voltage at the UVLO and OVLO pins each reach 2.5 V to GND (not SGND), respectively. The internal 21- μ A current sources provide hysteresis for each of the thresholds.

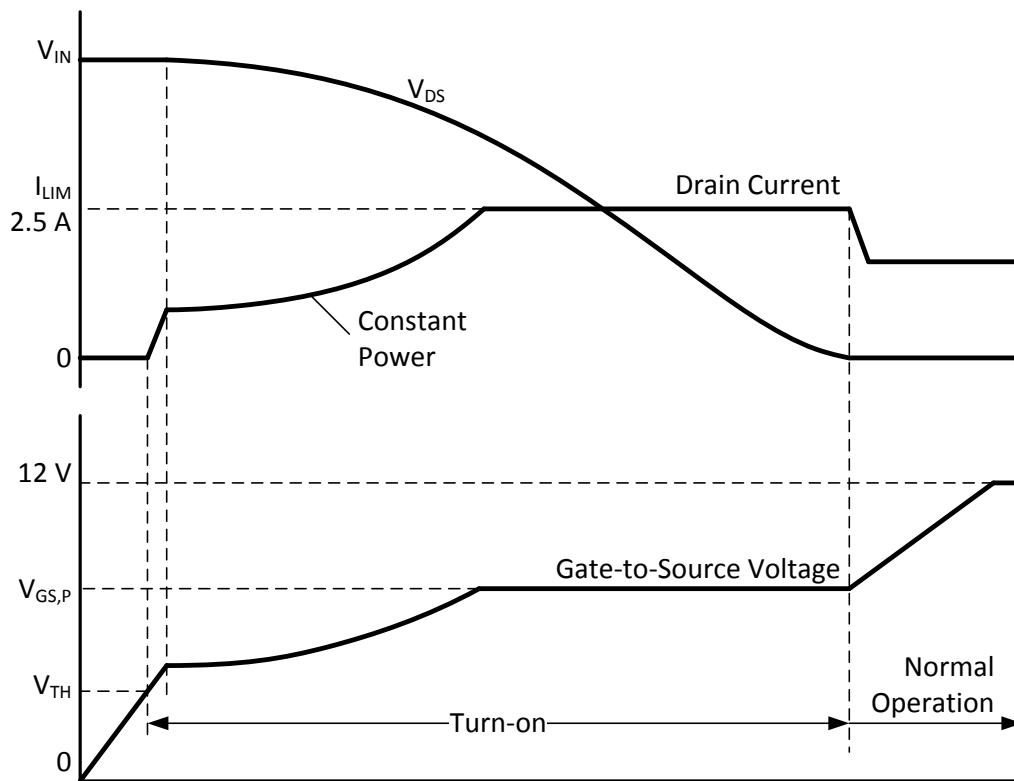


Figure 1. Power Up Using Power Limit and Current Limit

4 Board Connection/Setup and Probe Cautions

The input voltage source is connected to the J1 connector, and the load is connected to the J2 connector at the OUT and GND terminals. *Use twisted wires.* A voltmeter should be connected to the input terminals and one to the output terminals. The input current can be monitored with an ammeter or current probe. To monitor the status of the PGD output, connect a voltmeter from PGOOD to GND on the J2 terminal block. Put the slide switch in the ON position.

Increase the input voltage gradually. The input current should remain less than 2 mA until the upper UVLO threshold is reached (≈ 16 V). When the threshold is reached, Q1 and Q2 are turned on as described in [Section 3](#). If viewed on an oscilloscope, the input current increases as shown in [Figure 1](#) before settling at the value defined by the load. The turn-on timing depends on the input voltage, power limit setting, current limit setting, and the final load current, and is between ≈ 3.0 ms with no load current, and ≈ 7 ms with a 1-A load current, with $V_{IN} = 24$ V. See [Figure 1](#), [Figure 10](#), and [Figure 11](#).

The following should be kept in mind when the board is powered:

1. High voltage, equal to system input V_{SYSIN} , is present on C3, C4, Q1, Q2 and various points within the circuit. Use *caution* when probing the circuit to prevent injury, as well as possible damage to the circuit.
2. At maximum load current (2.5 A), the wire size and length used to connect the power source and the load become important. The wires connecting this evaluation board to the power source *should be twisted together* to minimize inductance in those leads. The same applies for the wires connecting this board to the load. This recommendation is made in order to minimize high voltage transients from occurring when the load current is shut off.

5 Circuit Parameter Changes

5.1 Current Limit

The current limit threshold is set by R5 according to [Equation 1](#):

$$I_{LIM} = \frac{55 \text{ mV}}{R_S} = \frac{55 \text{ mV}}{R_5} \quad (1)$$

If the load current increases such that the voltage across R5 reaches 55 mV, the LM5069 then modulates Q1's gate to limit the current to that level. This evaluation board is supplied with a 22-mΩ resistor for R5, resulting in a current limit of 2.5 A. To change the current limit threshold, replace R5 with a resistor of the required value and power capability.

For proper operation, the R_S resistor value should be no larger than 100 mΩ.

5.2 Power Limit

The maximum power dissipated in Q1 during turn-on, or due to a fault, is limited by R9 and R5 according to [Equation 2](#):

$$P_{FET,LIM} = \frac{R_{PWR}}{1.25 \times 10^5 \times R_S} = \frac{R_9}{1.25 \times 10^5 \times R_5} \quad (2)$$

With the components supplied on the evaluation board, $P_{FET(LIM)} = 30 \text{ W}$. During turn-on, when the voltage across Q1 is high, its gate is modulated to limit its drain current so the power dissipated in Q1 does not exceed 30 W. As the drain-to-source voltage decreases, the drain current increases, maintaining the power dissipation constant. When the drain current reaches the current limit threshold set by R5 (2.5 A), the current is then maintained constant until the output voltage reaches its final value. The current then decreases to a value determined by the load, see [Figure 10](#), and [Figure 11](#).

Each time Q1 is subjected to the maximum power limit conditions it is internally stressed for a few milliseconds. For this reason, keep in mind that the power limit threshold must be set lower than the limit indicated by the FET's SOA chart. In this evaluation board, the power limit threshold is set at 30 W, compared to ≈80 W limit indicated in the Vishay SUM50N06-16L data sheet. The FET manufacturer should be contacted for more information on this subject.

5.3 Insertion Time

The insertion time starts when the input voltage at VIN reaches 7.6 V, and its duration equals:

$$t_{insertion} = C_T \times \frac{4 \text{ V}}{5.5 \text{ } \mu\text{A}} = C_8 \times 7.24 \times 10^5 \quad (3)$$

During the insertion time, Q1 is held off regardless of the voltage at VIN. This delay allows ringing and transients at VIN to subside before the input voltage is applied to the load via Q1. The insertion time on this evaluation board is ≈400 ms (see [Figure 7](#)).

5.4 Fault Detection and Restart

If the load current increases to the fault level (the current limit threshold, 2.5 A), an internal current source charges the timing capacitor C8 at the TIMER pin. When the voltage at the TIMER pin reaches 4.0 V, the fault timeout period is complete, and the LM5069 shuts off Q1. The restart sequence then begins, consisting of seven cycles at the TIMER pin between 4.0 V and 1.25 V, as shown in [Figure 2](#). When the voltage at the TIMER pin reaches 0.3 V during the eighth high-to-low ramp, Q1 is turned on. If the fault is still present, the fault timeout period and the restart sequence repeat.

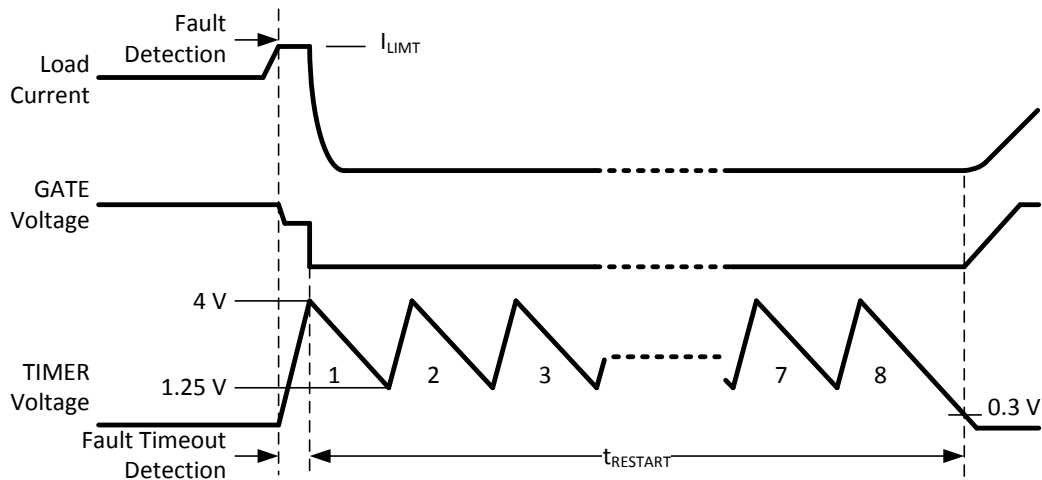


Figure 2. Fault Timeout and Restart Sequence

The fault timeout period and the restart timing are determined by the TIMER capacitor C8 according to [Equation 4](#) and [Equation 5](#):

$$t_{\text{fault}} = C_T \times \frac{4 \text{ V}}{85 \mu\text{A}} = C_8 \times 4.7 \times 10^4 \quad (4)$$

$$t_{\text{restart}} = C_T \times \left[\frac{7 \times 2.75 \text{ V}}{2.5 \mu\text{A}} + \frac{7 \times 2.75 \text{ V}}{85 \mu\text{A}} + \frac{3.7 \text{ V}}{2.5 \mu\text{A}} \right] = C_8 \times 9.4 \times 10^6 \quad (5)$$

The waveform at the TIMER pin can be monitored at the test pad located between C8 and R9. In this evaluation board, the fault timeout period is ≈ 26 ms, and the restart time is ≈ 5.3 seconds (see [Figure 8](#) and [Figure 9](#)).

5.5 UVLO/OVLO Input Voltage Thresholds

As supplied, the input voltage UVLO thresholds on this evaluation board are approximately 16 V increasing, and 14 V decreasing. The OVLO thresholds are approximately 36 V increasing, and 34 V decreasing. The four thresholds are determined by resistors R1–R4. The threshold voltage at each pin is 2.5 V to GND (not SGND), and internal 21- μ A current sources provide hysteresis for each threshold. See the device data sheet for more details.

Option A: This evaluation board is supplied with the jumper at JMP1 on pins 2–3, resulting in the configuration shown in [Figure 3](#).

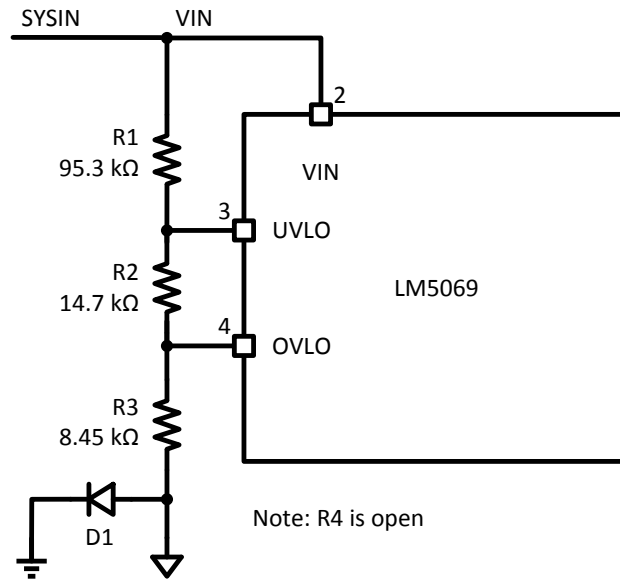


Figure 3. UVLO, OVLO Inputs (Option A)

To change the thresholds in this configuration, resistors R1–R3 are calculated using the following procedure:

- Choose the upper UVLO threshold (V_{UVH}), and the lower UVLO threshold (V_{UVL})
- Choose the upper OVLO threshold (V_{OVH})

The lower OVLO threshold (V_{OVL}) cannot be chosen in advance in this case, but is determined after the values for R1–R3 are determined. If V_{OVL} must be accurately defined in addition to the other three thresholds, see **Option B** following Equation 7.

The resistors are calculated as follows:

$$R_1 = \frac{(V_{UVH} - V_F) - (V_{UVL} - V_F)}{21 \mu A}$$

$$R_3 = \frac{2.5 V \times R_1 \times (V_{UVL} - V_F)}{(V_{OVH} - V_F) \times (V_{UVL} - V_F - 2.5 V)}$$

$$R_2 = \frac{2.5 V \times R_1}{V_{UVL} - V_F - 2.5 V} - R_3$$

$$V_F = V_{F,D1}$$
(6)

NOTE: V_F is the forward voltage of diode D1.

The lower OVLO threshold is calculated from:

$$V_{OVL} = \left[(R_1 + R_2) \times \left(\frac{2.5 V}{R_3} - 21 \mu A \right) \right] + 2.5 V + V_F$$
(7)

Option B: If all four thresholds must be determined accurately, move the jumper at JMP1 to pins 1–2, and add R4, resulting in the configuration shown in [Figure 4](#):

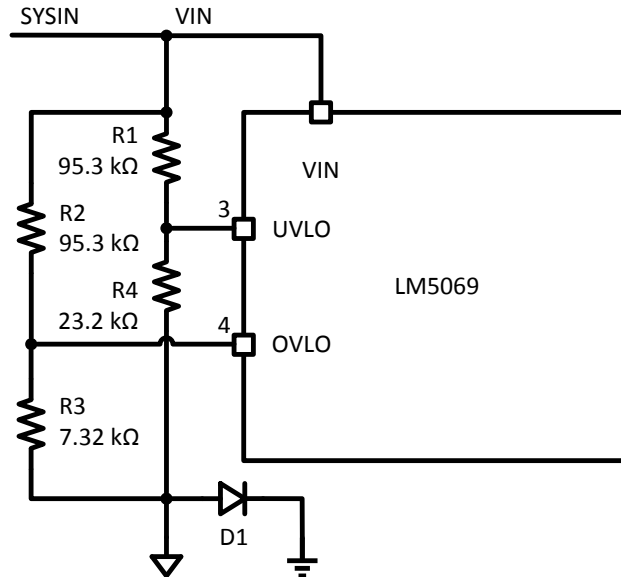


Figure 4. UVLO, OVLO Inputs (Option B)

The four resistor values are calculated as follows:

Choose the upper and lower UVLO thresholds (V_{UVH}) and (V_{UVL}):

$$R_1 = \frac{(V_{UVH} - V_F) - (V_{UVL} - V_F)}{21 \mu A} \quad (8)$$

$$R_4 = \frac{2.5 V \times R_1}{V_{UVL} - V_F - 2.5 V} \quad (9)$$

Choose the upper and lower OVLO threshold (V_{OVH}) and (V_{OVL}):

$$R_2 = \frac{(V_{OVH} - V_F) - (V_{OVL} - V_F)}{21 \mu A}$$

$$R_3 = \frac{2.5 V \times R_2}{V_{OVH} - V_F - 2.5 V} \quad (10)$$

CAUTION

The absolute maximum rating for the OVLO pin is 7 V. Do not let the voltage on OVLO exceed 7 V when VIN is at its maximum value. The absolute maximum rating for the UVLO pin is 100 V.

Option C: The minimum UVLO level is obtained by positioning the jumper at JMP1 on pins 1–2, and leaving R4 open, resulting in the configuration shown in Figure 5. Q1 is switched on when the voltage at VIN reaches the POR_{EN} threshold (≈8.4 V). The OVLO thresholds are set by R2 and R3, and their values are calculated using the procedure in Option B. The value for R1 is not critical, and can be as supplied. Please adhere to the previous **CAUTION**.

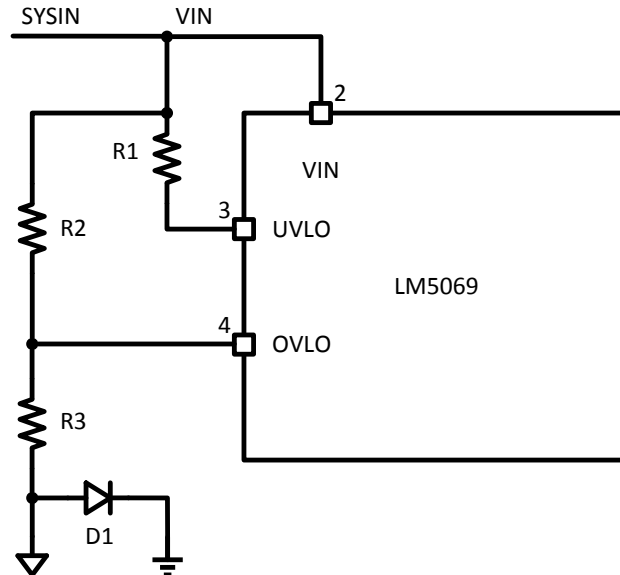


Figure 5. Minimum UVLO Threshold, Adjustable OVLO

Option D: The OVLO function can be disabled by removing the jumper from JMP1. The UVLO thresholds are set by R1 and R4 using the procedure in Option B or C.

5.6 Surge Clamping

Surge clamping is performed by the FET, Q1 (see Figure 18), which will clamp any input voltages that rise above the level programmed by Z2. As input voltage increases during a surge event, the output voltage will also increase and the internal charge pump will try to keep V_{GATE} 12 V above V_{OUT}. Because of Z2, V_{GATE} cannot rise above V_{Z,Z2}; therefore, V_{OUT} cannot rise above (V_{Z,Z2} – V_{THRESHOLD_Q1}).

For a different surge clamp voltage, use the following equation to select an alternate Zener Diode;

$$V_{\text{ZENER}} = V_{\text{LOAD_MAX_SURGE}} + V_{\text{THRESHOLD_Q1}} \quad (11)$$

NOTE: If there is a resistive path < 1 MΩ from V_{IN} (LM5069 pin 2) to GND (LM5069 pin 5) then D2 and R6 are not required. OV, UV programming resistors often provide this resistive path. D2 and R6 are intended to provide a weak gate pin pull down during reverse hookup conditions in cases where there is no external pull down.

5.7 Shutdown

With the circuit in normal operation, the LM5069 can be shut down by grounding the UVLO pin. Slide switch SW1, left bottom side of the board, can be used for this purpose. See Figure 12.

5.8 Power Good Output

The PGOOD logic output provides an indication of the circuit's condition. This output is high when the circuit is in normal operation – the OUT voltage is within 1.25 V of the input. PGOOD is low when the circuit is shutdown, either intentionally or due to a fault. PGOOD is also high when VIN is less than 5 V. As the output voltage will be clamped at 32 V, the PGOOD is low when input voltage exceeds 33.5 V.

This EVB is supplied with pins 1–2 connected on JMP2, powering the PGD pin from the output voltage through a 100-kΩ pull-up resistor. To change the high-level PGOOD voltage, move the jumper on JMP2 to pins 2–3, and supply the appropriate pull-up voltage to terminal P1 (located next to JMP2). If the UVLO pin is taken low to disable the LM5069, PGOOD switches low within 10 μs without waiting for the OUT voltage to fall, see [Figure 13](#).

If a delay at the PGOOD output is desired, a resistor and capacitor can be added at positions R8 and C6.

5.9 Reverse Hookup Protection

When power feeds are incorrectly connected and polarity to the EVM is reversed, a simple low-power diode (D1) between supply GND and LM5069 GND protects the LM5069 by keeping it off and without power.

To prevent current from flowing through the body diode of Q1 during reverse supply connection, a second FET, (Q2), is put in series with Q1. Q1 drain and Q2 Drain connected, creating a back to back FET configuration.

When $V_{IN} < UV_{LM5069}$, the gate pin is internally pulled to GND, keeping Q1 and Q2 off.

6 Performance Characteristics Plots

6.1 Reverse Polarity Input

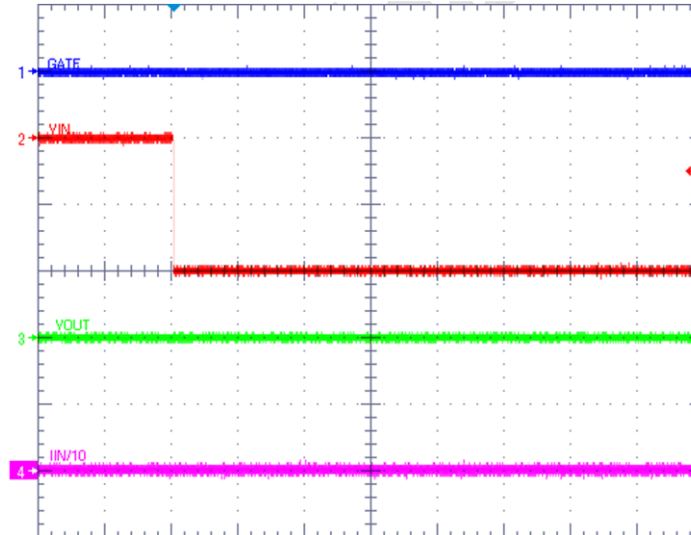


Figure 6. Reverse Polarity Input

Horizontal resolution: 40 ms/div
Channel 1: GATE, 50 V/div
Channel 2: SYS IN, 20 V/div

Channel 3: SYS OUT, 20 V/div
Channel 4: I_{IN} , 1 A/div
SYS VIN = -40 V

6.2 Insertion Time Delay

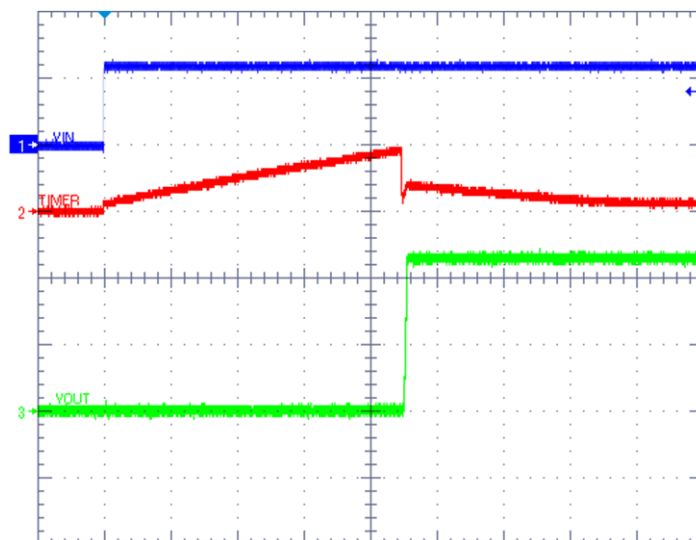


Figure 7. Insertion Timer Delay

Horizontal resolution: 100 ms/div

Channel 1: SYS IN, 20 V/div

Channel 2: TIMER, 5 V/div

Channel 3: SYS OUT, 10 V/div

$C_T = 0.56 \mu\text{F}$

SYS IN = 24 V

6.3 Fault Timeout

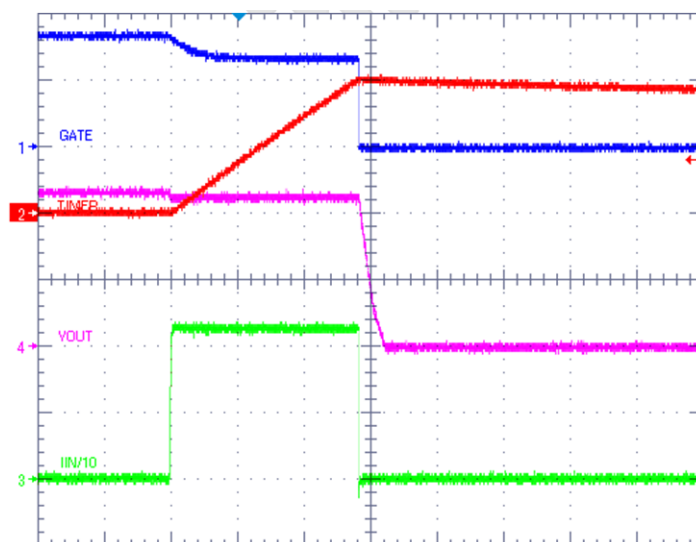


Figure 8. Fault Timeout

Horizontal resolution: 100 ms/div

Channel 1: GATE, 20 V/div

Channel 2: TIMER, 2 V/div

Channel 3: $I_{IN}/10$, 1 V/div

Channel 4: SYS OUT, 10 V/div

$C_T = 0.56 \mu\text{F}$

SYS IN = 24 V

6.4 Restart Timing

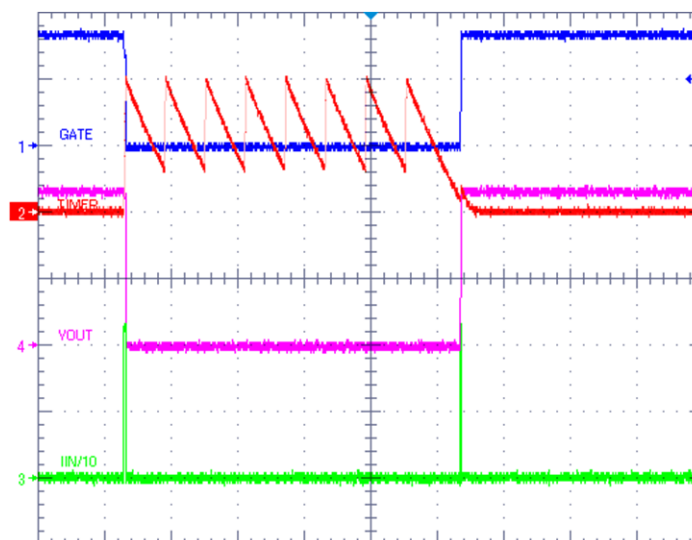


Figure 9. Restart Timing

Horizontal resolution: 1.0 s/div

Channel 1: GATE, 20 V/div

Channel 2: TIMER, 2 V/div

Channel 3: I_{IN} , 1 A/div

Channel 4: SYS OUT, 10 V/div

$C_T = 0.56 \mu\text{F}$

SYS IN = 24 V

6.5 Turn-on Sequence with No Load Current

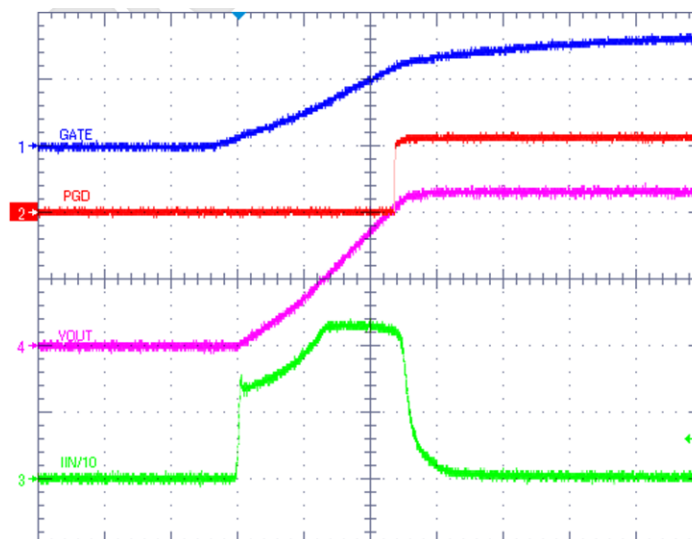


Figure 10. Turn-on Sequence with No Load Current

Horizontal resolution: 1.0 ms/div

Channel 1: GATE, 20 V/div

Channel 2: PGD, 20 V/div

Channel 3: I_{IN} , 1 A/div

Channel 4: SYS OUT, 10 V/div

SYS IN = 24 V

6.6 Turn-on Sequence with 1-A Load Current

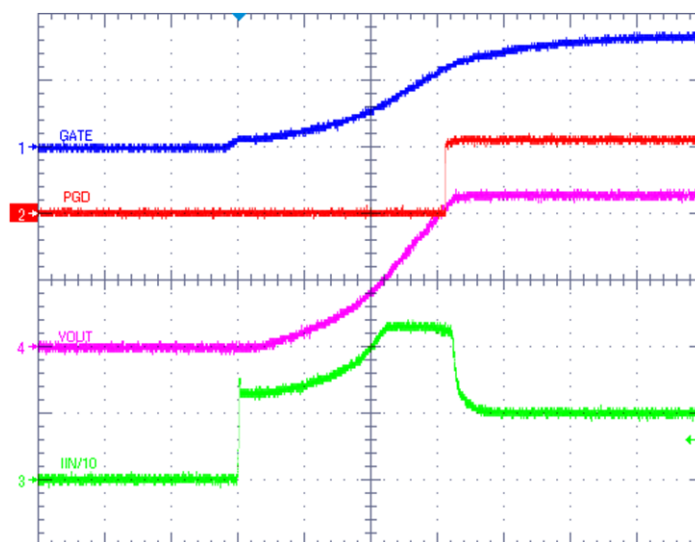


Figure 11. Turn-on Sequence with 1-A Load Current

Horizontal resolution: 2.0 ms/div

Channel 1: GATE, 20 V/div

Channel 2: PGD, 20 V/div

Channel 3: I_{IN} , 1 A/div

Channel 4: SYS OUT, 10 V/div

SYS IN = 24 V

6.7 Output Shutdown Using UVLO Pin

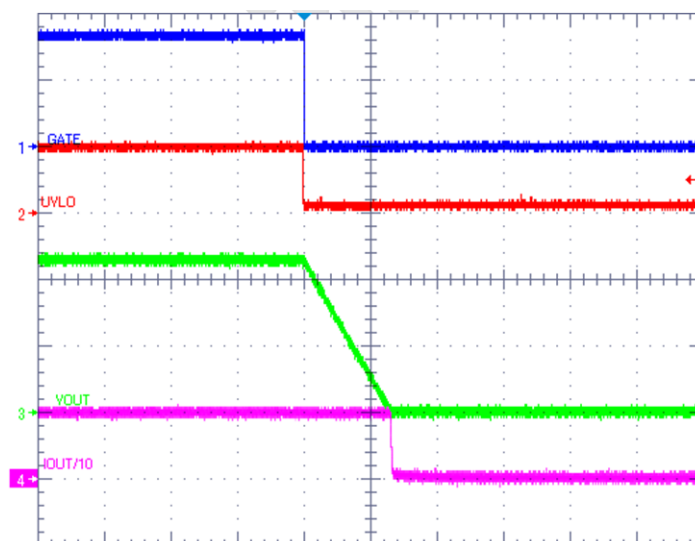


Figure 12. Output Shutdown Using UVLO Pin

Horizontal resolution: 4.0 ms/div


Channel 1: GATE, 20 V/div

Channel 2: UVLO, 5 V/div

Channel 3: SYS OUT, 10 V/div

Channel 4: I_{OUT} , 1 A/div

SYS IN = 24 V

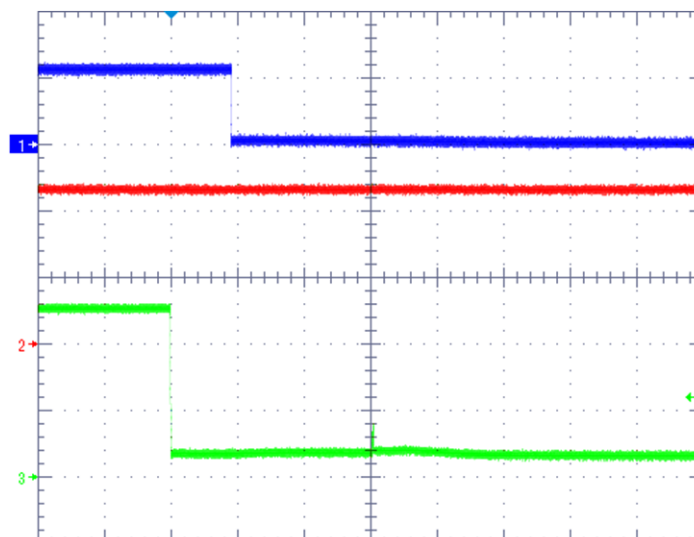
Figure 13. Output Shutdown Using UVLO Pin

Horizontal resolution: 10 μ s/div


Channel 1: PGD, 20 V/div

Channel 2: SYS OUT, 10 V/div

Channel 3: UVLO, 2 V/div

SYS IN = 24 V

6.8 Input Surge

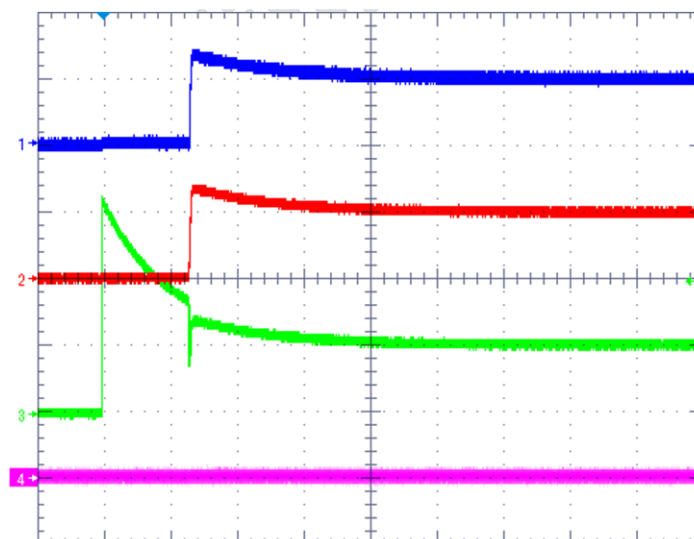
Figure 14. Input Surge (Not Clamped)

Horizontal resolution: 400 ms/div

Channel 1: PGD, 20 V/div

Channel 2: SYS OUT, 20 V/div

Channel 3: SYS IN, 20 V/div

Channel 4: I_{IN} , 1 A/div

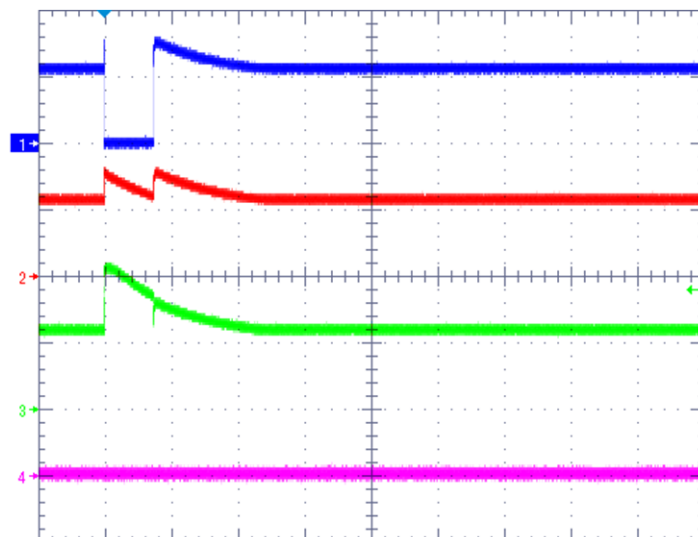


Figure 15. Input Surge (Clamped)

Horizontal resolution: 400 ms/div

Channel 1: PGD, 20 V/div

Channel 2: SYS OUT, 20 V/div

Channel 3: SYS IN, 20 V/div

Channel 4: I_{IN} , 1 A/div

6.9 Inrush Current

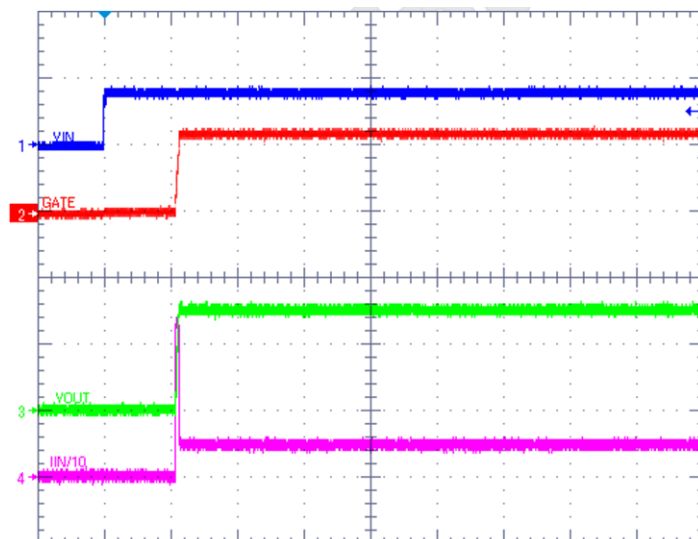


Figure 16. Inrush Current with 2550-μF Output Capacitor

Horizontal resolution: 400 ms/div

Channel 1: SYS IN, 20 V/div

Channel 2: GATE, 20 V/div

Channel 3: SYS OUT, 10 V/div

Channel 4: I_{OUT} , 1 A/div

SYS IN = 16 V

Output Capacitor: $470\ \mu\text{F} \times 5 + 100\ \mu\text{F} \times 2 = 2550\ \mu\text{F}$

Load: 32-Ω resistor

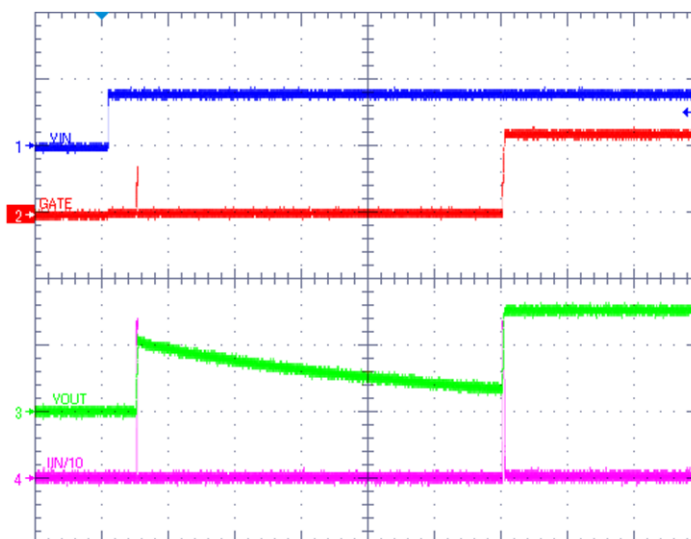


Figure 17. Inrush Current with 4900- μ F Output Capacitor

Horizontal resolution: 1 s/div

Channel 1: SYS IN, 20 V/div

Channel 2: GATE, 20 V/div

Channel 3: SYS OUT, 10 V/div

Channel 4: I_{OUT} , 1 A/div

SYS IN = 16 V

Output Capacitor: $470 \mu\text{F} \times 10 + 100 \mu\text{F} \times 2 = 4900 \mu\text{F}$

Load: 900- Ω resistor

7 Schematic

The schematic for this EVM is shown in [Figure 18](#).

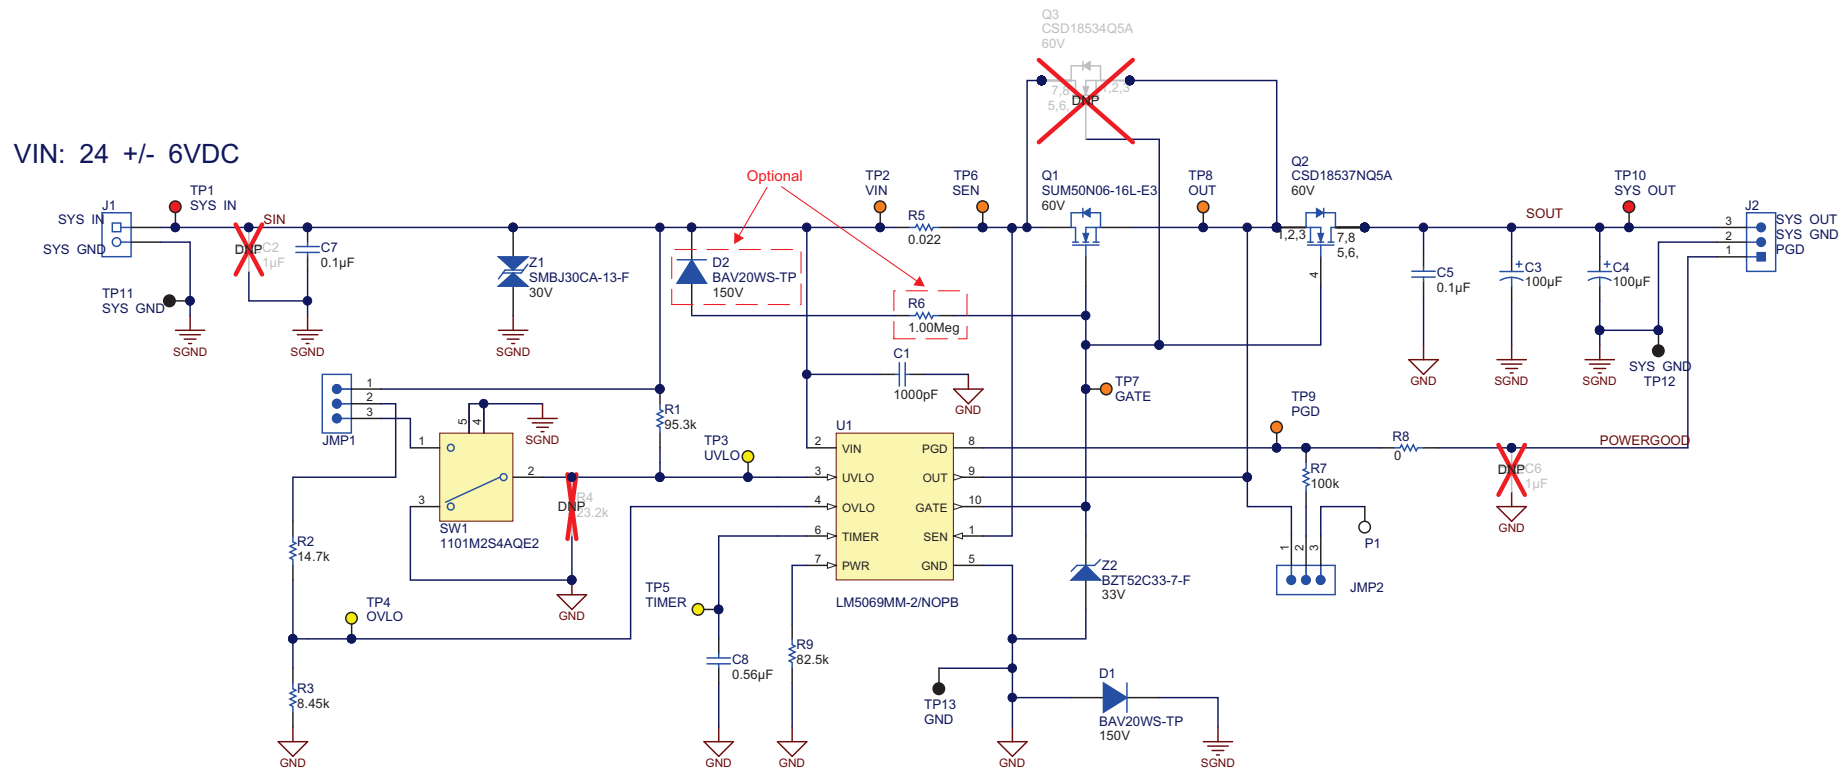


Figure 18. LM5069EVM-627 Schematic

8 PCB Layout

Figure 19 through Figure 21 illustrate the PCB layouts.

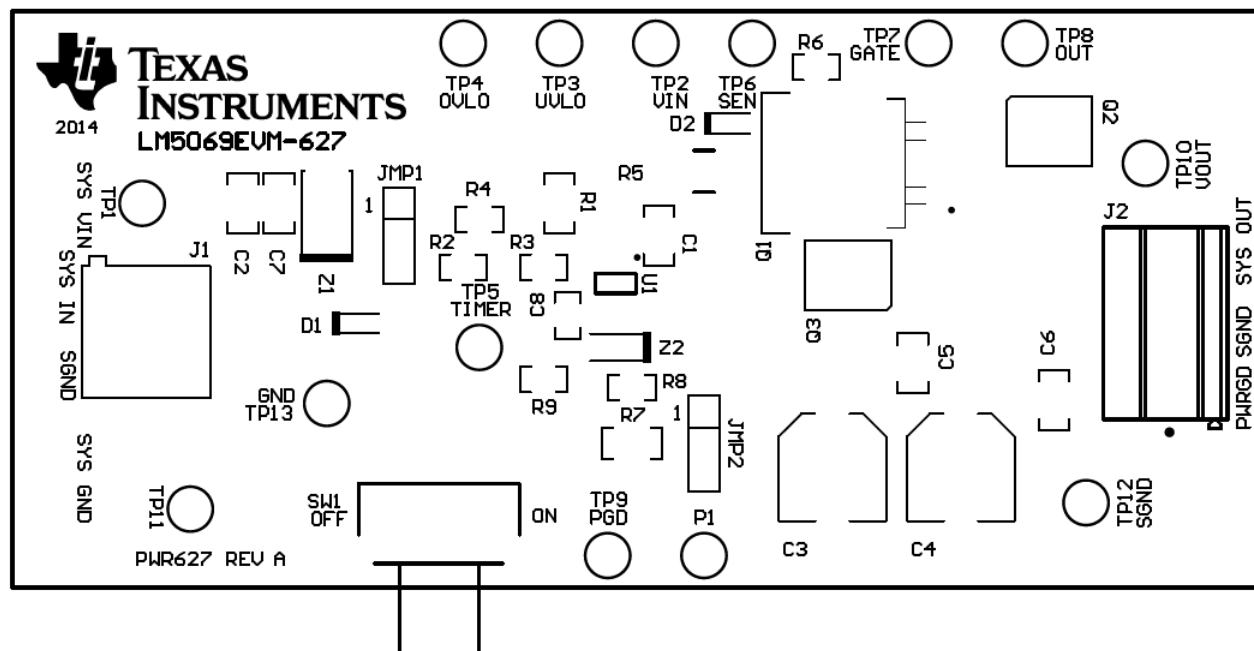


Figure 19. Top Side Placement

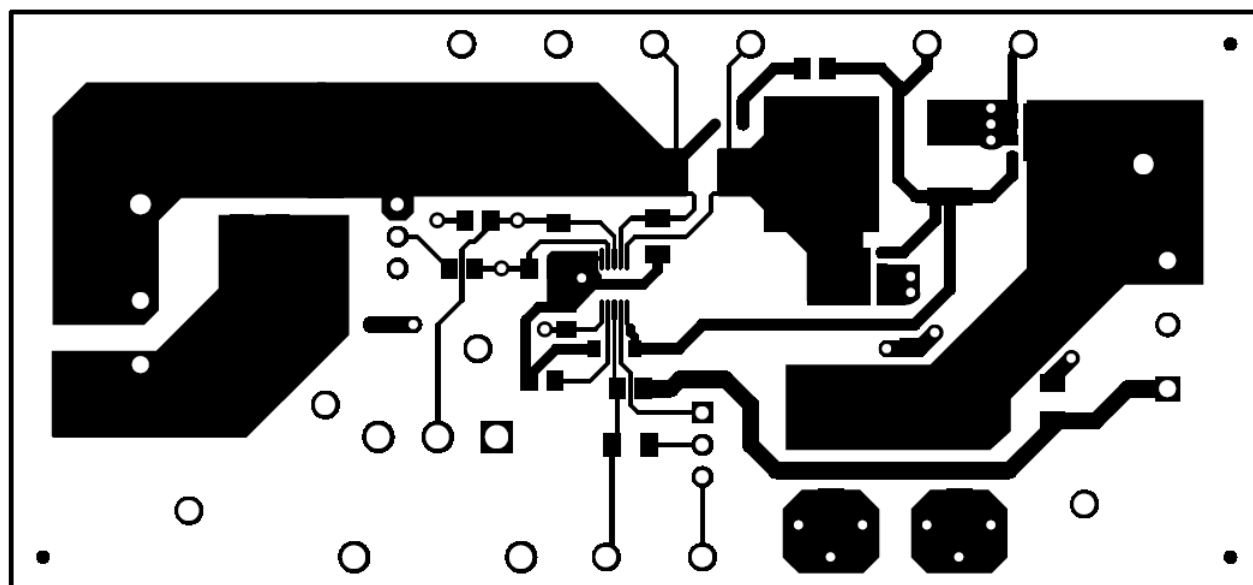


Figure 20. Top Layer

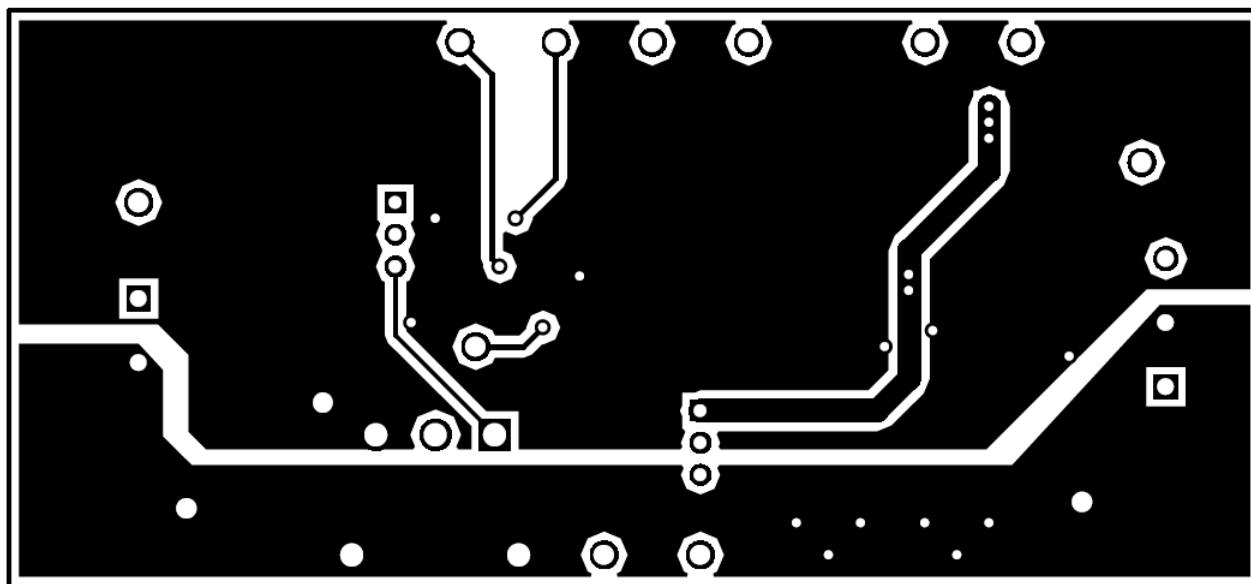


Figure 21. Bottom Layer

9 Bill of Materials (BOM)

Table 1 lists the BOM for this EVM.

Table 1. Bill of Materials

Designator	Quantity	Value	Description	PackageReference	PartNumber	Manufacturer
!PCB	1		Printed Circuit Board		PWR627	Any
C1	1	1000pF	CAP, CERM, 1000pF, 50V, +/-10%, X7R, 1206	1206	12065C102KAT2A	AVX
C3, C4	2	100uF	CAP, AL, 100uF, 50V, +/-20%, 0.34 ohm, SMD	SMT Radial F	EEE-FK1H101P	Panasonic
C5	1	0.1uF	CAP, CERM, 0.1uF, 50V, +/-10%, X7R, 1206	1206	12065C104KAT2A	AVX
C7	1	0.1uF	CAP, CERM, 0.1uF, 100V, +/-20%, X7R, 1206	1206	C3216X7R2A104M	TDK
C8	1	0.56uF	CAP, CERM, 0.56uF, 25V, +/-10%, X7R, 0805	0805	C0805C564K3RACTU	Kemet
D1, D2	2	150V	Diode, P-N, 150V, 0.2A, SOD-323	SOD-323	BAV20WS-TP	Micro Commercial Components
FID1, FID2, FID3	3		Fiducial mark. There is nothing to buy or mount.	Fiducial	N/A	N/A
H1, H2, H3, H4	4		Bump, Cylindrical, 0.312 X 0.200, Black	Black Bump	SJ61A1	3M
J1	1	2x1	Conn Term Block, 2POS, 5.08mm, TH	2POS Terminal Block	1715721	Phoenix Contact
J2	1		TERM BLOCK 3POS 5.08MM, TH	15.24x13.8x9.8mm	1715734	Phoenix Contact
JMP1, JMP2	2	1x3	Header, 100mil, 3x1, Gold, TH	PBC03SAAN	PBC03SAAN	Sullins Connector Solutions
P1	1	White	Test Point, Multipurpose, White, TH	White Multipurpose Testpoint	5012	Keystone
Q1	1	60V	MOSFET, N-CH, 60V, 50A, DDPK	DDPK	SUM50N06-16L-E3	Vishay-Siliconix
Q2	1	60V	MOSFET, N-CH, 60V, 50A, SON 5x6mm	SON 5x6mm	CSD18537NQ5A	Texas Instruments
R1	1	95.3k	RES, 95.3k ohm, 1%, 0.25W, 1206	1206	CRCW120695K3FKEA	Vishay-Dale
R2	1	14.7k	RES, 14.7k ohm, 1%, 0.125W, 0805	0805	CRCW080514K7FKEA	Vishay-Dale
R3	1	8.45k	RES, 8.45k ohm, 1%, 0.125W, 0805	0805	CRCW08058K45FKEA	Vishay-Dale
R5	1	0.022	RES, 0.022 ohm, 1%, 0.5W, 1812	1812	ERJ-L12KF22MU	Panasonic
R6	1	1.00Meg	RES, 1.00Meg ohm, 1%, 0.125W, 0805	0805	CRCW08051M00FKEA	Vishay-Dale
R7	1	100k	RES, 100k ohm, 1%, 0.25W, 1206	1206	CRCW1206100KFKEA	Vishay-Dale
R8	1	0	RES, 0 ohm, 5%, 0.125W, 0805	0805	CRCW08050000Z0EA	Vishay-Dale
R9	1	82.5k	RES, 82.5k ohm, 1%, 0.125W, 0805	0805	CRCW080582K5FKEA	Vishay-Dale
SH-J1, SH-J2	2	1x2	Shunt, 100mil, Flash Gold, Black	Closed Top 100mil Shunt	SPC02SYAN	Sullins Connector Solutions
SW1	1		Slide Switches SPDT R/A, TH	12.7x6.6x6.35mm	1101M2S4AQE2	C&K Components
TP1, TP10	2	Red	Test Point, Multipurpose, Red, TH	Red Multipurpose Testpoint	5010	Keystone
TP2, TP6, TP7, TP8, TP9	5	Orange	Test Point, Multipurpose, Orange, TH	Orange Multipurpose Testpoint	5013	Keystone
TP3, TP4, TP5	3	Yellow	Test Point, Multipurpose, Yellow, TH	Yellow Multipurpose Testpoint	5014	Keystone
TP11, TP12, TP13	3	Black	Test Point, Multipurpose, Black, TH	Black Multipurpose Testpoint	5011	Keystone
U1	1		Positive High Voltage Hot Swap / Inrush Current Controller with Power Limiting, 10-pin MSOP, Pb-Free	MUB10A	LM5069MM-2/NOPB	Texas Instruments
Z1	1	30V	Diode, TVS, Bi, 30V, 600W, SMB	SMB	SMBJ30CA-13-F	Diodes Inc.
Z2	1	33V	Diode, Zener, 33V, 500mW, SOD-123	SOD-123	BZT52C33-7-F	Diodes Inc.
C2	0	1uF	CAP, CERM, 1uF, 100V, +/-20%, X7R, 1206	1206	C3216X7R2A105M160AA	TDK
C6	0	1uF	CAP, CERM, 1uF, 50V, +/-10%, X7R, 1206	1206	C3216X7R1H105K	TDK
Q3	0	60V	MOSFET, N-CH, 60V, 50A, SON 5x6mm	SON 5x6mm	CSD18534Q5A	Texas Instruments
R4	0	23.2k	RES, 23.2k ohm, 1%, 0.125W, 0805	0805	CRCW080523K2FKEA	Vishay-Dale

ADDITIONAL TERMS AND CONDITIONS, WARNINGS, RESTRICTIONS, AND DISCLAIMERS FOR EVALUATION MODULES

Texas Instruments Incorporated (TI) markets, sells, and loans all evaluation boards, kits, and/or modules (EVMs) pursuant to, and user expressly acknowledges, represents, and agrees, and takes sole responsibility and risk with respect to, the following:

1. User agrees and acknowledges that EVMs are intended to be handled and used for feasibility evaluation only in laboratory and/or development environments. Notwithstanding the foregoing, in certain instances, TI makes certain EVMs available to users that do not handle and use EVMs solely for feasibility evaluation only in laboratory and/or development environments, but may use EVMs in a hobbyist environment. All EVMs made available to hobbyist users are FCC certified, as applicable. Hobbyist users acknowledge, agree, and shall comply with all applicable terms, conditions, warnings, and restrictions in this document and are subject to the disclaimer and indemnity provisions included in this document.
2. Unless otherwise indicated, EVMs are not finished products and not intended for consumer use. EVMs are intended solely for use by technically qualified electronics experts who are familiar with the dangers and application risks associated with handling electrical mechanical components, systems, and subsystems.
3. User agrees that EVMs shall not be used as, or incorporated into, all or any part of a finished product.
4. User agrees and acknowledges that certain EVMs may not be designed or manufactured by TI.
5. User must read the user's guide and all other documentation accompanying EVMs, including without limitation any warning or restriction notices, prior to handling and/or using EVMs. Such notices contain important safety information related to, for example, temperatures and voltages. For additional information on TI's environmental and/or safety programs, please visit www.ti.com/esh or contact TI.
6. User assumes all responsibility, obligation, and any corresponding liability for proper and safe handling and use of EVMs.
7. Should any EVM not meet the specifications indicated in the user's guide or other documentation accompanying such EVM, the EVM may be returned to TI within 30 days from the date of delivery for a full refund. THE FOREGOING LIMITED WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY TI TO USER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. TI SHALL NOT BE LIABLE TO USER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES RELATED TO THE HANDLING OR USE OF ANY EVM.
8. No license is granted under any patent right or other intellectual property right of TI covering or relating to any machine, process, or combination in which EVMs might be or are used. TI currently deals with a variety of customers, and therefore TI's arrangement with the user is not exclusive. TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services with respect to the handling or use of EVMs.
9. User assumes sole responsibility to determine whether EVMs may be subject to any applicable federal, state, or local laws and regulatory requirements (including but not limited to U.S. Food and Drug Administration regulations, if applicable) related to its handling and use of EVMs and, if applicable, compliance in all respects with such laws and regulations.
10. User has sole responsibility to ensure the safety of any activities to be conducted by it and its employees, affiliates, contractors or designees, with respect to handling and using EVMs. Further, user is responsible to ensure that any interfaces (electronic and/or mechanical) between EVMs and any human body are designed with suitable isolation and means to safely limit accessible leakage currents to minimize the risk of electrical shock hazard.
11. User shall employ reasonable safeguards to ensure that user's use of EVMs will not result in any property damage, injury or death, even if EVMs should fail to perform as described or expected.
12. User shall be solely responsible for proper disposal and recycling of EVMs consistent with all applicable federal, state, and local requirements.

Certain Instructions. User shall operate EVMs within TI's recommended specifications and environmental considerations per the user's guide, accompanying documentation, and any other applicable requirements. Exceeding the specified ratings (including but not limited to input and output voltage, current, power, and environmental ranges) for EVMs may cause property damage, personal injury or death. If there are questions concerning these ratings, user should contact a TI field representative prior to connecting interface electronics including input power and intended loads. Any loads applied outside of the specified output range may result in unintended and/or inaccurate operation and/or possible permanent damage to the EVM and/or interface electronics. Please consult the applicable EVM user's guide prior to connecting any load to the EVM output. If there is uncertainty as to the load specification, please contact a TI field representative. During normal operation, some circuit components may have case temperatures greater than 60°C as long as the input and output are maintained at a normal ambient operating temperature. These components include but are not limited to linear regulators, switching transistors, pass transistors, and current sense resistors which can be identified using EVMs' schematics located in the applicable EVM user's guide. When placing measurement probes near EVMs during normal operation, please be aware that EVMs may become very warm. As with all electronic evaluation tools, only qualified personnel knowledgeable in electronic measurement and diagnostics normally found in development environments should use EVMs.

Agreement to Defend, Indemnify and Hold Harmless. User agrees to defend, indemnify, and hold TI, its directors, officers, employees, agents, representatives, affiliates, licensors and their representatives harmless from and against any and all claims, damages, losses, expenses, costs and liabilities (collectively, "Claims") arising out of, or in connection with, any handling and/or use of EVMs. User's indemnity shall apply whether Claims arise under law of tort or contract or any other legal theory, and even if EVMs fail to perform as described or expected.

Safety-Critical or Life-Critical Applications. If user intends to use EVMs in evaluations of safety critical applications (such as life support), and a failure of a TI product considered for purchase by user for use in user's product would reasonably be expected to cause severe personal injury or death such as devices which are classified as FDA Class III or similar classification, then user must specifically notify TI of such intent and enter into a separate Assurance and Indemnity Agreement.

RADIO FREQUENCY REGULATORY COMPLIANCE INFORMATION FOR EVALUATION MODULES

Texas Instruments Incorporated (TI) evaluation boards, kits, and/or modules (EVMs) and/or accompanying hardware that is marketed, sold, or loaned to users may or may not be subject to radio frequency regulations in specific countries.

General Statement for EVMs Not Including a Radio

For EVMs not including a radio and not subject to the U.S. Federal Communications Commission (FCC) or Industry Canada (IC) regulations, TI intends EVMs to be used only for engineering development, demonstration, or evaluation purposes. EVMs are not finished products typically fit for general consumer use. EVMs may nonetheless generate, use, or radiate radio frequency energy, but have not been tested for compliance with the limits of computing devices pursuant to part 15 of FCC or the ICES-003 rules. Operation of such EVMs may cause interference with radio communications, in which case the user at his own expense will be required to take whatever measures may be required to correct this interference.

General Statement for EVMs including a radio

User Power/Frequency Use Obligations: For EVMs including a radio, the radio included in such EVMs is intended for development and/or professional use only in legally allocated frequency and power limits. Any use of radio frequencies and/or power availability in such EVMs and their development application(s) must comply with local laws governing radio spectrum allocation and power limits for such EVMs. It is the user's sole responsibility to only operate this radio in legally acceptable frequency space and within legally mandated power limitations. Any exceptions to this are strictly prohibited and unauthorized by TI unless user has obtained appropriate experimental and/or development licenses from local regulatory authorities, which is the sole responsibility of the user, including its acceptable authorization.

U.S. Federal Communications Commission Compliance

For EVMs Annotated as FCC – FEDERAL COMMUNICATIONS COMMISSION Part 15 Compliant

Caution

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications could void the user's authority to operate the equipment.

FCC Interference Statement for Class A EVM devices

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at its own expense.

FCC Interference Statement for Class B EVM devices

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Industry Canada Compliance (English)

For EVMs Annotated as IC – INDUSTRY CANADA Compliant:

This Class A or B digital apparatus complies with Canadian ICES-003.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Concerning EVMs Including Radio Transmitters

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Concerning EVMs Including Detachable Antennas

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

This radio transmitter has been approved by Industry Canada to operate with the antenna types listed in the user guide with the maximum permissible gain and required antenna impedance for each antenna type indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Canada Industry Canada Compliance (French)

Cet appareil numérique de la classe A ou B est conforme à la norme NMB-003 du Canada

Les changements ou les modifications pas expressément approuvés par la partie responsable de la conformité ont pu vider l'autorité de l'utilisateur pour actionner l'équipement.

Concernant les EVMs avec appareils radio

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Concernant les EVMs avec antennes détachables

Conformément à la réglementation d'Industrie Canada, le présent émetteur radio peut fonctionner avec une antenne d'un type et d'un gain maximal (ou inférieur) approuvé pour l'émetteur par Industrie Canada. Dans le but de réduire les risques de brouillage radioélectrique à l'intention des autres utilisateurs, il faut choisir le type d'antenne et son gain de sorte que la puissance isotrope rayonnée équivalente (p.i.r.e.) ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante.

Le présent émetteur radio a été approuvé par Industrie Canada pour fonctionner avec les types d'antenne énumérés dans le manuel d'usage et ayant un gain admissible maximal et l'impédance requise pour chaque type d'antenne. Les types d'antenne non inclus dans cette liste, ou dont le gain est supérieur au gain maximal indiqué, sont strictement interdits pour l'exploitation de l'émetteur.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2014, Texas Instruments Incorporated

Important Notice for Users of EVMs Considered “Radio Frequency Products” in Japan

EVMs entering Japan are NOT certified by TI as conforming to Technical Regulations of Radio Law of Japan.

If user uses EVMs in Japan, user is required by Radio Law of Japan to follow the instructions below with respect to EVMs:

1. Use EVMs in a shielded room or any other test facility as defined in the notification #173 issued by Ministry of Internal Affairs and Communications on March 28, 2006, based on Sub-section 1.1 of Article 6 of the Ministry's Rule for Enforcement of Radio Law of Japan,
2. Use EVMs only after user obtains the license of Test Radio Station as provided in Radio Law of Japan with respect to EVMs, or
3. Use of EVMs only after user obtains the Technical Regulations Conformity Certification as provided in Radio Law of Japan with respect to EVMs. Also, do not transfer EVMs, unless user gives the same notice above to the transferee. Please note that if user does not follow the instructions above, user will be subject to penalties of Radio Law of Japan.

<http://www.tij.co.jp>

【無線電波を送信する製品の開発キットをお使いになる際の注意事項】 本開発キットは技術基準適合証明を受けておりません。 本製品のご使用に際しては、電波法遵守のため、以下のいずれかの措置を取っていただく必要がありますのでご注意ください。

1. 電波法施行規則第6条第1項第1号に基づく平成18年3月28日総務省告示第173号で定められた電波暗室等の試験設備でご使用いただく。
2. 実験局の免許を取得後ご使用いただく。
3. 技術基準適合証明を取得後ご使用いただく。。

なお、本製品は、上記の「ご使用にあたっての注意」を譲渡先、移転先に通知しない限り、譲渡、移転できないものとします

上記を遵守頂けない場合は、電波法の罰則が適用される可能性があることをご留意ください。

日本テキサス・インスツルメンツ株式会社

東京都新宿区西新宿 6 丁目 2 4 番 1 号

西新宿三井ビル

<http://www.tij.co.jp>

Texas Instruments Japan Limited

(address) 24-1, Nishi-Shinjuku 6 chome, Shinjuku-ku, Tokyo, Japan

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Applications Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community

e2e.ti.com