




Series 805 Mighty Mouse Triple-Start ACME Thread Flexible, Lightweight Phantom Cable Cordsets

805-057, 058, 059 and -060 Ordering Information

Series 805 "Phantom Cable" Cordsets size #12 thru #23 Contacts										
Sample Part Number										
805-027	-B	N	2	Z1	5-3	N	A	-60	C	N
Series	End A Connector	End B Connector	Wire Size	Shell Material/ Finish	Insert Arr.	Protective Cover	Shell Key Pos.	Length	Shield Option	Jacket Option
Size #23 Contacts 805-057 Phantom Cable Cordset	-A Plug, with Male Pin Contacts	A Plug, with Male Pin Contacts	Size #23 Contacts 4 #24 AWG	M Aluminum / Electroless Nickel	Available in Shell Sizes 8 Thru 19	P Metal Protective Covers Included	A Normal	Overall Length In Inches 12 Inch Min.	A Amberstrand	D Nomex, Olive Drab
Size #20 HD Contacts 805-058 Phantom Cable Cordset	-B Plug, with Female Socket Contacts	B Plug, with Female Socket Contacts	6 #26 AWG	NF Aluminum / Cadmium with OD Chromate	See Cont. Arr. Page H-3	N No Covers Supplied	B Pos. B		B Armorlite	N Nomex, Black
Size #16 Contacts 805-059 Phantom Cable Cordset	-C Rec. with Male Pin Contacts	C Rec. with Male Pin Contacts	8 #28 AWG	ZNU Aluminum / Zinc-Nickel with Black Chromate			C Pos. C		C Tin-Coated Copper	H Halar (Monofil)
Size #12 Contacts 805-060 Phantom Cable Cordset	-D Rec. with Female Socket Contacts	D Rec. with Female Socket Contacts	Size #20 HD Contacts 0 #20 AWG	MT Aluminum / Nickel-PTFE			D Pos. D			P Peek (Monofil)
			2 #22 AWG	Z1 Stainless Steel / Passivated			E Pos. E			
			8 #16 AWG				F Pos. F			
			18 #18 AWG				See key positions on page H-5			
			2 #12 AWG							
			4 #14 AWG							

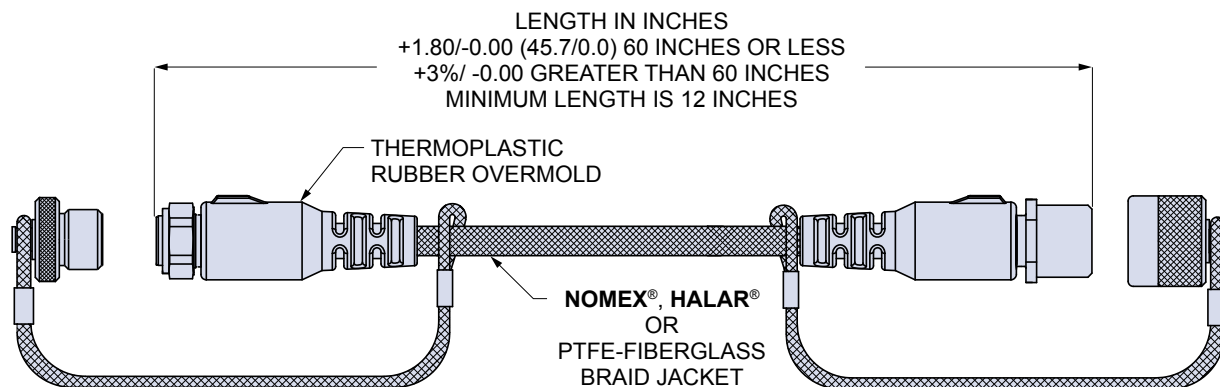

NOTES

- Double-ended cordsets are wired pin #1 to pin #1, #2 to #2, and so on.
- Wires are silver-coated stranded copper with TPE insulation, 600V, UL VW-1 rated.
- Wires are white with color stripe per MIL-STD-681. Wire #1 is WHT/BLK, wire #2 is WHT/BRN, etc.

Dimensions in Inches (millimeters) are subject to change without notice.