
ON Semiconductor®

Test Procedure for the STK433-130NGEVB Evaluation Board


Characteristics confirmation

[Connection Diagram]

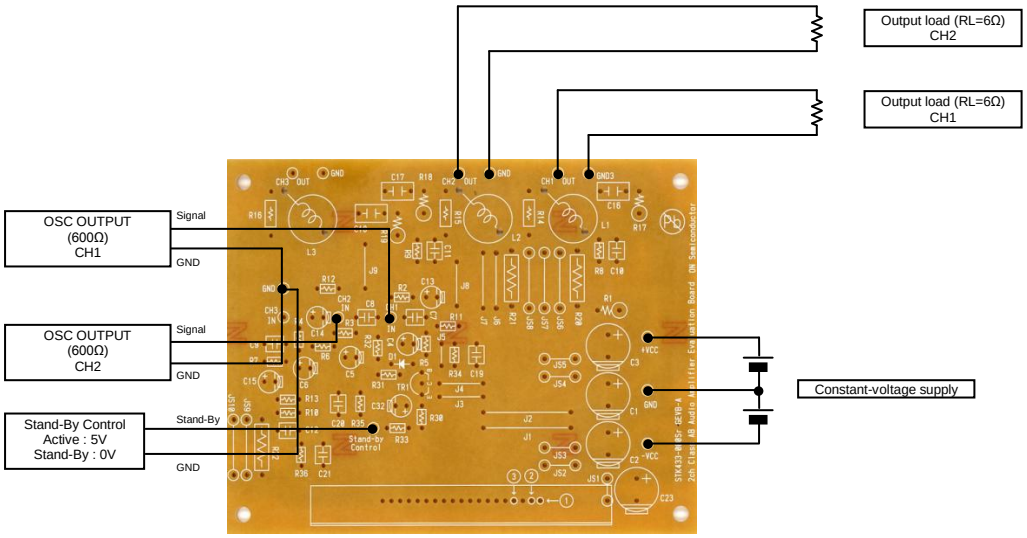

Sound quality confirmation, load short-circuit test, noise examination

[Connection Diagram]

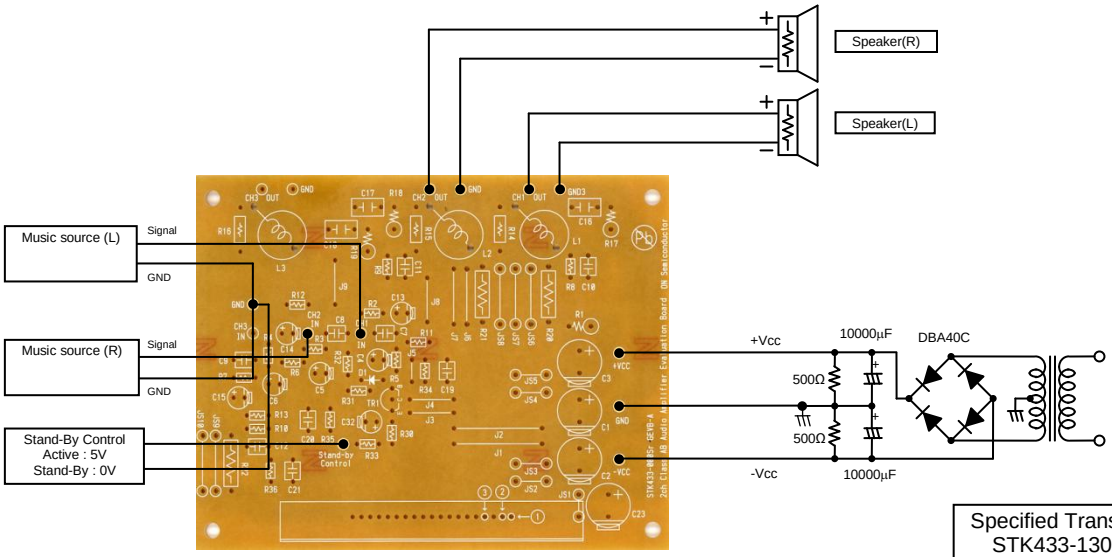

[Required Equipment]

Equipment	Efficiency
Power supply +Vcc	100V-10A
Power supply -Vcc	100V-10A
Power supply Stand-By Control	10V-1A
Load	6Ω(Non-inductive load)
Measurement	Audio analyzer (Panasonic VP-7723B)

[Supply Voltage]

+Vcc/-Vcc : Power Supply for audio power amplifiers

Output 1 (10%/1kHz)	150W x 2 ch
Output 2 (0.4%/2Hz-20kHz)	100W x 2 ch
Recommended operating Vcc (6Ohm)	± 44V

Stand-By Control (5V) : Power Supply for Stand-By Control Input

5V : Operation / 0V : Stand-by

[Operation Guide]

1. Installation of the heat sink — Please refer to a thermal design tip for the amplifier.
2. Load Connection — Connect the RL=6Ω (Non-inductive load)
3. Power Supply Connection — Connect the +Vcc/-Vcc (Output off : 0V)
4. Stand-By Control Connection — Stand-By Control = 0V : Stand-by
5. Input Connection — Connect the Oscillator (Sine wave / Output resistance 600Ω)
   The gain of the evaluation board is set in 30dB.
6. Power Supply — At first, supply DC voltage to +Vcc and -Vcc.
   Next, Stand-By Control = 5V : Operation

