



Binding Post with 4mm Banana Socket

Features

- Nickel Plated Brass
- Accepts up to 14 Gauge Wire

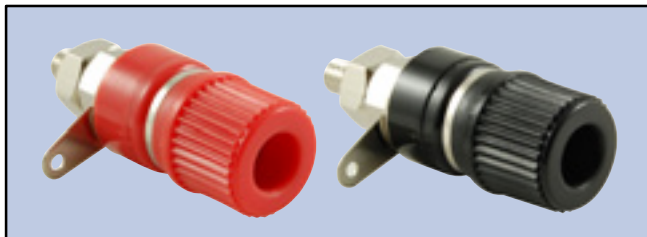

81-BP1

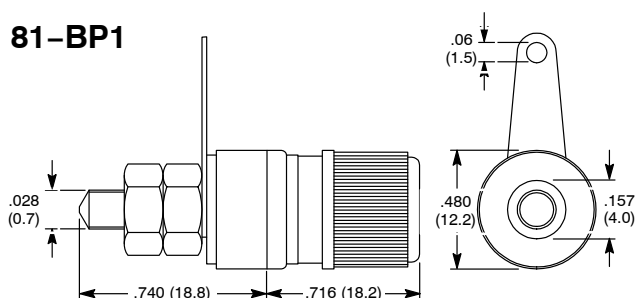

Specifications

Current Rating: 10A

Insulation Resistance: DC500V 100mΩ

Dielectric Strength: AC 1000V 1 minute

Temperature Rating: -20°C to +80°C

Insulation Material: Nylon (UL Flame: 94V-2)


Mounting Hole: 8.5(215.90)

	NTE Type No.	Description
NEW	81-BP1R	Binding Post Red 10A with 4mm Banana Socket Nickel Plated Brass with Nylon Insulation.
NEW	81-BP1B	Binding Post Black 10A with 4mm Banana Socket Nickel Plated Brass with Nylon Insulation.


Binding Post with 4mm Banana Socket

Features

- Nickel Plated Brass
- Accepts up to 14 Gauge Wire

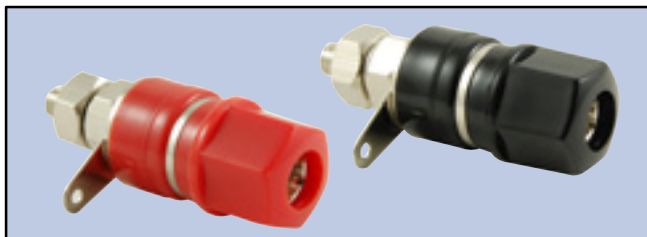

81-BP2

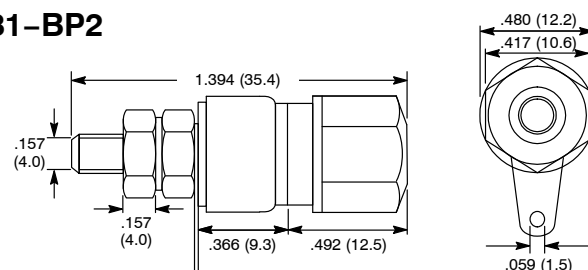

Specifications

Current Rating: 10A

Insulation Resistance: DC500V 100mΩ

Dielectric Strength: AC 1000V 1 minute

Temperature Rating: -20°C to +80°C

Insulation Material: Nylon (UL Flame: 94V-2)


Mounting Hole: 8.5(215.90)

	NTE Type No.	Description
NEW	81-BP2R	Binding Post Red 10A with 4mm Banana Socket Nickel Plated Brass with Nylon Insulation.
NEW	81-BP2B	Binding Post Black 10A with 4mm Banana Socket Nickel Plated Brass with Nylon Insulation.


Banana Socket 4mm

Features

- Nickel Plated Brass

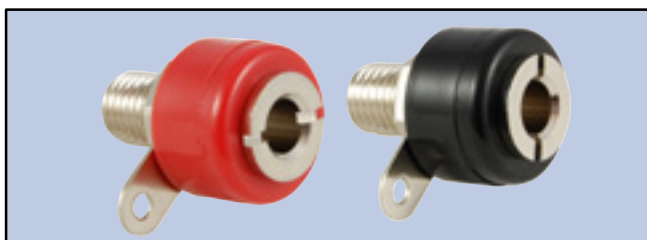

81-BP3

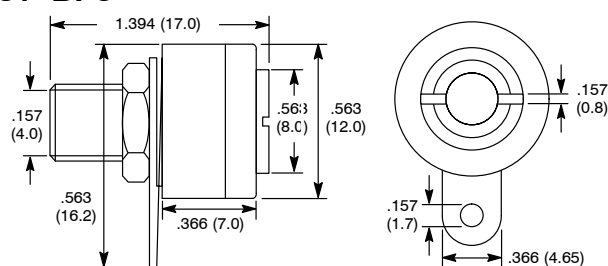

Specifications

Current Rating: 10A

Insulation Resistance: DC500V 100mΩ

Dielectric Strength: AC 1000V 1 minute

Temperature Rating: -20°C to +80°C

Insulation Material: Nylon (UL Flame: 94V-2)


Mounting Hole: 8.5(215.90)

	NTE Type No.	Description
NEW	81-BP3R	4mm Banana Socket Red 10A with Nickel Plated Brass with Nylon Insulation.
NEW	81-BP3B	4mm Banana Socket Black 10A with Nickel Plated Brass with Nylon Insulation.


Binding Post with 4mm Banana Socket – 2.1mm Cross Hole

Features

- Nickel Plated Brass
- Accepts up to 14 Gauge Wire

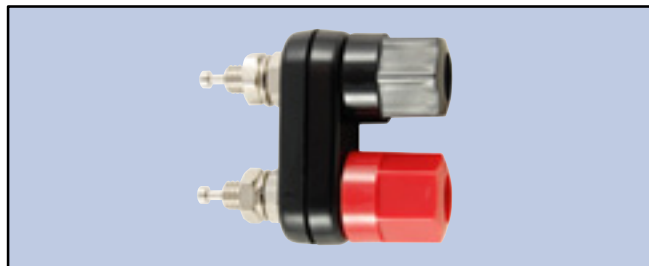

81-BP4

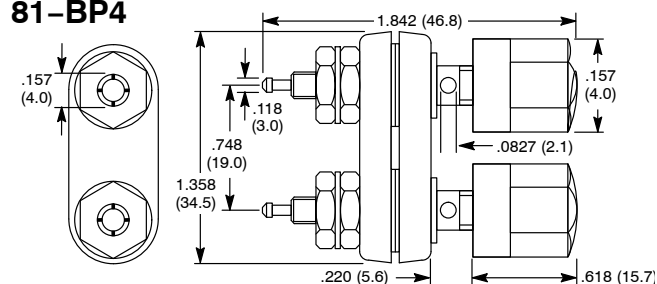

Specifications

Current Rating: 10A

Insulation Resistance: DC500V 100mΩ

Dielectric Strength: AC 1000V 1 minute

Temperature Rating: -10°C to +80°C

Insulation Material: Nylon (UL Flame: 94V-2)

Mounting Hole: 2 Places, 12.8(0.504)

NTE No.	Description
NEW 81-BP4BR	Binding Post Dual Black & Red 10A with 4mm Banana Sockets Nickel Plated Brass Nylon Insulation.


Banana Socket 4mm

Features

- Nickel Plated Brass



81-BS5

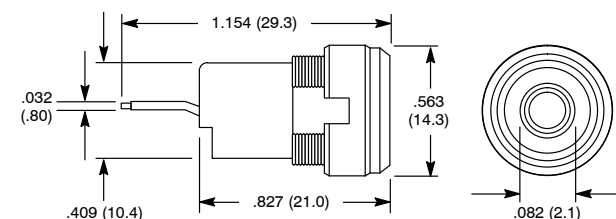

Specifications

Current Rating: 10A

Insulation Resistance: DC500V 100mΩ

Dielectric Strength: AC 1000V 1 minute

Temperature Rating: -20°C to +80°C

Insulation Material: Nylon (UL Flame: 94V-2)

Mounting Hole: 12.2(0.480)

NTE Type No.	Description
NEW 81-BS5R	Banana Socket Red 10A Nickel Plated Brass with Nylon Insulation .187 inch QC Terminals.
NEW 81-BS5B	Banana Socket Black 10A Nickel Plated Brass with Nylon Insulation .187 inch QC Terminals.


Binding Post with 4mm Banana Socket – 2.2mm & 4mm Cross Hole

Features

- Nickel Plated Brass
- Accepts up to 14 Gauge Wire



81-BP6

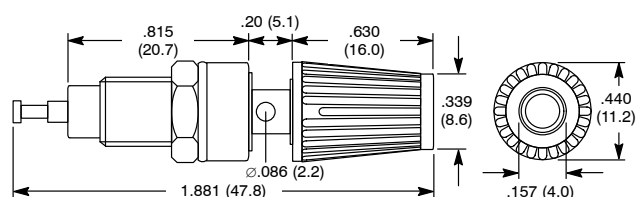

Specifications

Current Rating: 10A

Insulation Resistance: DC500V 100mΩ

Dielectric Strength: AC 1500V 1 minute

Temperature Rating: -20°C to +80°C

Insulation Material: Nylon (UL Flame: 94V-2)

Mounting Hole: 8.0(0.315) x 6.5(0.256)

NTE No.	Description
NEW 81-BP6R	Binding Post Red 10A with 4mm Banana Socket Nickel Plated Brass with Nylon Insulation.
NEW 81-BP6B	Binding Post Black 10A with 4mm Banana Socket Nickel Plated Brass with Nylon Insulation.


Binding Post with 4mm Banana Socket – 2.2mm & 4mm Cross Hole

Features

- Nickel Plated Brass
- Accepts up to 14 Gauge Wire



81-BP7

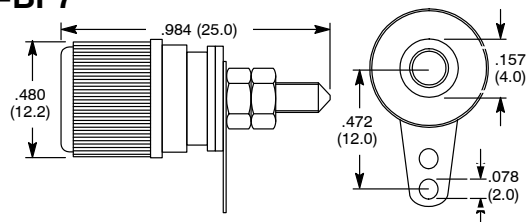

Specifications

Current Rating: 10A

Insulation Resistance: DC500V 100mΩ

Dielectric Strength: AC 500V 1 minute.

Temperature Rating: -20°C to +80°C

Insulation Material: Nylon (UL Flame: 94V-2)

Mounting Hole: 3.2(0.126)

	NTE No.	Description
NEW	81-BP7R	Binding Post Red 10A with 4mm Banana Socket Nickel Plated Brass with Nylon Insulation.
NEW	81-BP7B	Binding Post Black 10A with 4mm Banana Socket Nickel Plated Brass with Nylon Insulation.


Binding Post with 4mm Banana Socket – 2.1mm Cross Hole

Features

- Nickel Plated Brass
- Accepts up to 14 Gauge Wire



81-BP8

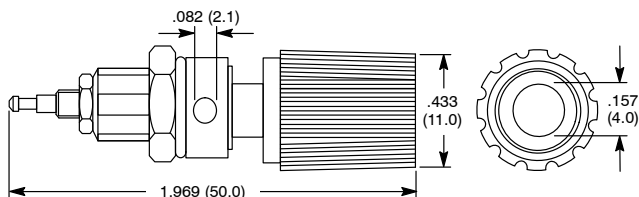

Specifications

Current Rating: 10A

Insulation Resistance: DC500V 100mΩ

Dielectric Strength: AC 1000V 1 minute

Temperature Rating: -20°C to +80°C

Insulation Material: Nylon (UL Flame: 94V-2)


Mounting Hole: 8.2(0.323) x 6.4(0.252)

	NTE No.	Description
NEW	81-BP8R	Binding Post Red 10A with 4mm Banana Socket Nickel Plated Brass with Nylon Insulation.
NEW	81-BP8B	Binding Post Black 10A with 4mm Banana Socket Nickel Plated Brass with Nylon Insulation.


Binding Post with 4mm Banana Socket – 2.2mm & 4mm Cross Hole

Features

- Nickel Plated Brass
- Accepts up to 14 Gauge Wire

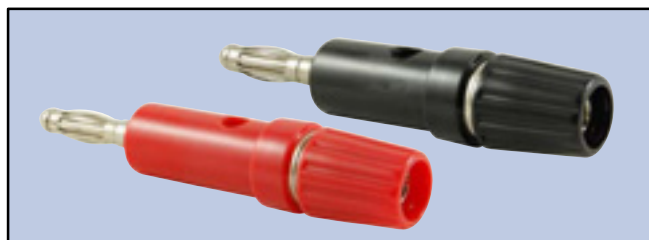

81-BP9

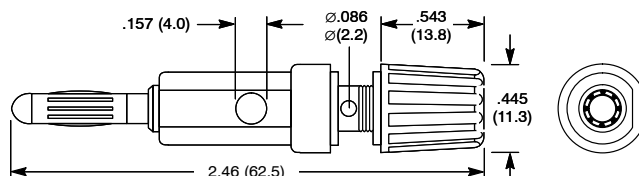

Specifications

Current Rating: 10A

Insulation Resistance: DC500V 100mΩ

Dielectric Strength: AC 1000V 1 minute

Temperature Rating: -20°C to +80°C

Insulation Material: Nylon (UL Flame: 94V-2)


Mounting Hole: N/A

	NTE No.	Description
NEW	81-BP9R	Binding Post Red 10A with 4mm Banana Socket Nickel Plated Brass with Nylon Insulation.
NEW	81-BP9B	Binding Post Black 10A with 4mm Banana Socket Nickel Plated Brass with Nylon Insulation.

Banana Socket 4mm

Features

- Nickel Plated Brass

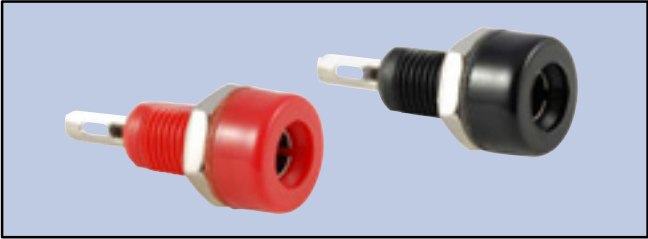


NEW

NEW

NTE Type No.	Description
81-BS10R	Banana Socket Red10A Nickel Plated Brass with Nylon Insulation Solder Terminals.
81-BS10B	Banana Socket Black10A Nickel Plated Brass with Nylon Insulation Solder Terminals.

81-BS10

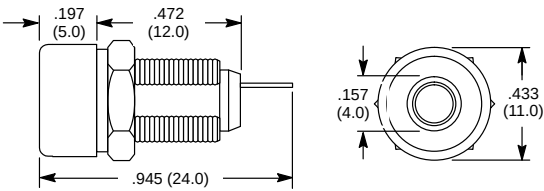

Specifications

Current Rating: 10A
Insulation Resistance: DC500V 100mΩ
Dielectric Strength: AC 1000V 1 minute
Temperature Rating: -20°C to +80°C
Insulation Material: Nylon (UL Flame: 94V-2)
Mounting Hole: 8.2(0.323) x 6.2(0.244)