Using the TPS40195EVM

User's Guide



Literature Number: SLUU297A
December 2007–Revised July 2008

A 12-V Input, 3.3-V Output, 20-A Synchronous Buck Converter

1 INTRODUCTION

The TPS40195EVM evaluation module (EVM) is a synchronous buck converter providing a fixed 3.3-V output at up to 20 A from a 12-V input bus. The EVM is designed to start up from a single supply, so no additional bias voltage is required for start up. The module uses the TPS40195 Mid-Voltage Synchronous Buck Controller (TI Literature Number SLUS720).

2 DESCRIPTION

TPS40195EVM is designed to use a regulated 12-V bus (8 V to 20 V) to produce a regulated 3.3-V output at up to 20 A of load current. TPS40195EVM is designed to demonstrate the TPS40195 in a typical 12-V bus to low-voltage application while providing a number of test points to evaluate the performance of the TPS40195 in a given application.

2.1 Applications

- Non-Isolated Medium Current Point-of-Load and Low-Voltage Bus Converters
- Networking Equipment
- Telecommunications Equipment
- Computer Peripherals
- Digital Set-Top Box

2.2 Features

- 8-V to 20-V Input Range
- 3.3-V Fixed Output
- 20-A_{DC} Steady State Output Current
- 300-kHz Switching Frequency
- 2-Layer PCB with all Components on Top Side
- Convenient Test Points for Probing Switching Waveforms and Non-Invasive Loop Response Testing

3 TPS40195EVM ELECTRICAL PERFORMANCE SPECIFICATIONS

Table 1. TPS40195EVM Electrical and Performance Specifications

PARAMETER		CONDITIONS	MIN	NOM	MAX	UNITS
INPUT CHARACTERSTICS						
V_{IN}	Input voltage		8	12	20	V
I_{IN}	Input current	V_{IN} = 8 V, I_{OUT} = 20 A	-	9		A
	No load input current	V_{IN} = 12 V, I_{OUT} = 0 A	-	60		mA
V_{IN_ON}	Input turn-on voltage	I_{OUT} = 0 A to 20 A	6.3	7.2	8	V
V_{IN_HYS}	Input hysteresis	I_{OUT} = 0 A to 20 A		1.12		
OUTPUT CHARACTERSTICS						
V_{OUT}	Output voltage	V_{IN} = 12 V, I_{OUT} = 20 A	3.23	3.3	3.36	V
	Line regulation	V_{IN} = 8 to 20 V, I_{OUT} = 20 A	-	-	0.5%	
	Load regulation	V_{IN} = 12 V, I_{OUT} = 0 to 20 A	-	-	0.5%	
V_{OUTpp}	Output voltage ripple	V_{IN} = 12 V, I_{OUT} = 20 A	-	-	50	mVpp
I_{OUT}	Output current	V_{IN} = 8 V to 20 V	0	20	20	A
I_{OCP}	Output over current inception point	V_{IN} = 12 V	20.5	-	-	
TRANSIENT RESPONSE						
ΔI	Load step	20 A to 4 A to 20 A	-	16	-	A
	Load slew rate		-	1	-	A/µsec
	Over shoot		-	300	-	mV
	Settling time		-	20	-	µs
SYSTEMS CHARACTERSTICS						
F_{SW}	Switching frequency		240	300	360	kHz
η_{pk}	Peak efficiency	V_{IN} = 12 V, I_{OUT} = 0 to 20 A	-	95%	-	
η	Full load efficiency	V_{IN} = 12 V, I_{OUT} = 20 A	-	92%	-	
T_{op}	Operating temperature range	V_{IN} = 8 to 20 V, I_{OUT} = 0 to 20 A, with fan	-	25	-	°C

4 SCHEMATIC

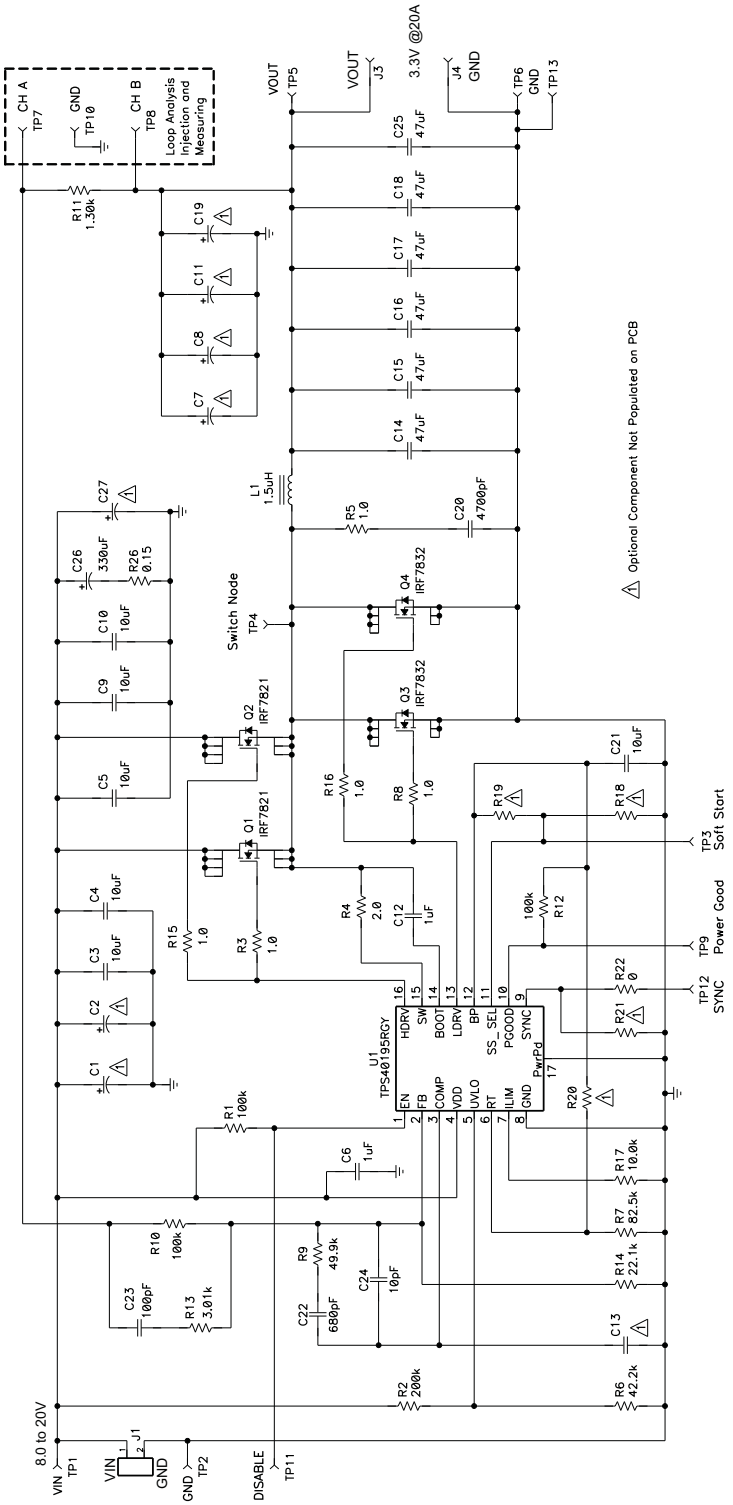


Figure 1. TPS40195EVM Schematic for Reference Only, See Table 3 List of Materials for Specific Values

4.1 Test Points

Table 2. Test Points Available on theTPS40195EVM

TEST POINT	NAME	DESCRIPTION
TP1	VIN	Measure the input voltage here
TP2	GND	Ground connection for input voltage measurements
TP3	Soft Start	Monitor the soft start capacitor voltage
TP4	Switch Node	Monitor switch node voltage
TP5	VOUT	Measure the output voltage and ripple here, see Section 6.1
TP6	GND	Ground connection for output voltage measurements
TP7	CHA	Input A for loop analysis, see Section 6.3
TP8	CHB	Input B for loop analysis, see Section 6.3
TP9	Power Good	Monitor power good signal here, see Section 6.4
TP10	GND	General ground connection
TP11	DISABLE	Short TP11 to TP2 to disable the TPS40195 controller, see Section 6.4
TP12	SYNC	Inject square wave synchronizing pulse here, see Section 6.5
TP13	GND	Used for output ripple test with TP5, see Section 6.2

5 TEST SET UP

5.1 Equipment

5.1.1 Voltage Source

V_{IN}: The input voltage source (V_{IN}) should be a 0-V to 20-V variable dc source capable of 20 A_{DC}.

5.1.2 Meters

A1: 0 A_{DC} to 20 A_{DC}, ammeter

V1: V_{IN}, 0 V to 20 V voltmeter

V2: V_{OUT} 0 V to 5 V voltmeter

5.1.3 Loads

LOAD1: The output load (LOAD1) should be an electronic constant current mode load capable of 0 A_{DC} to 20 A_{DC} at 3.3 V

5.1.4 Oscilloscope

Oscilloscope: A digital or analog oscilloscope can be used to measure the ripple voltage on V_{OUT}. It is also used to monitor various test points around the EVM. Section 6 describes test procedure for these measurements. For ripple measurements it is not recommended to use the leaded ground connection supplied with the oscilloscope. This may induce additional noise due to the large ground loop area.

5.1.5 Signal Generator

A signal genitor can be used to synchronous the EVM to a higher switching frequency. See Section 6 for details on doing this.

5.1.6 Recommended Wire Gauge

V_{IN} to J1: The connection between the source voltage, V_{IN} and J1 of the EVM can carry as much as 20 A_{DC}. The minimum recommended wire size is 2x AWG #16 with the total length of wire less than 4 feet (2 feet input, 2 feet return).

J3 and J4 to LOAD1 (Power): The power connection between J2 of the EVM and LOAD1 can carry as much as 20 A_{DC}. The minimum recommended wire size is 2x AWG #16, with the total length of wire less than 2 feet (1 feet output, 1 feet return).

5.1.7 Other

Fan: This evaluation module includes components that can get hot to the touch, because this EVM is not enclosed to allow probing of circuit nodes, a small fan capable of 200 LFM to 400 LFM is required to reduce component surface temperatures to prevent user injury. The EVM should not be left unattended while powered. The EVM should not be probed while the fan is not running.

5.2 Equipment Setup

Shown in Figure 2 is the basic test set up recommended to evaluate the TPS40195EVM. Please note that although the return for J1 and J4 are the same, the connections should remain separate as shown in Figure 2.

1. Working at an ESD workstation, make sure that any wrist straps, bootstraps or mats are connected referencing the user to earth ground before power is applied to the EVM. Electrostatic smock and safety glasses should also be worn.
2. Prior to connecting the dc input source, V_{IN}, it is advisable to limit the source current from V_{IN} to 20 A maximum. Make sure V_{IN} is initially set to 0 V and connected as shown in Figure 2.
3. Connect the ammeter A1 (0 A to 20 A range) between V_{IN} and J1 as shown in Figure 2.
4. Connect voltmeter V1 to TP1 and TP2 as shown in Figure 2.
5. Connect LOAD1 to J3 and J4 as shown in Figure 2. Set LOAD1 to constant current mode to sink 0 A_{DC} before V_{IN} is applied.
6. Connect voltmeter, V2 across TP5 and TP6 as shown in Figure 2.
7. Place Fan as shown in Figure 2 and turn on, making sure air is flowing across the EVM.

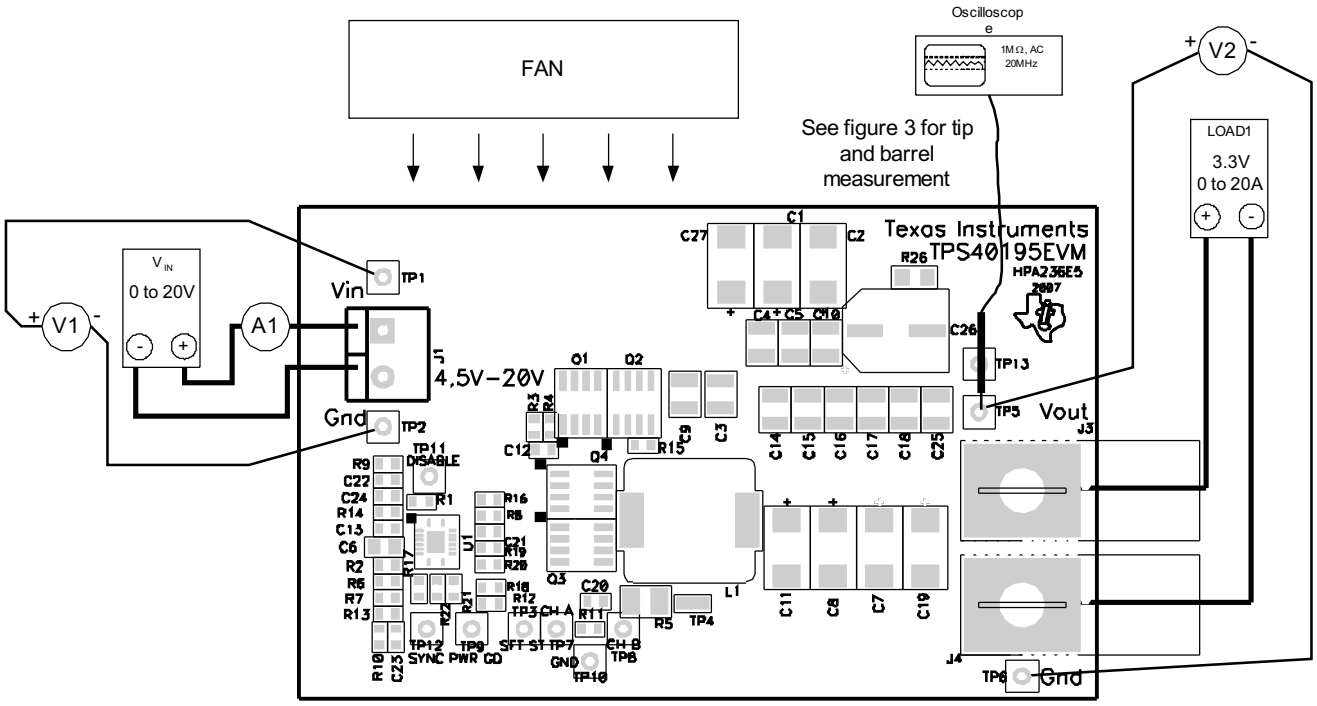


Figure 2. TPS40195EVM Recommended Test Set-Up

6 TEST PROCEDURE

6.1 Line and Load Regulation

1. Increase V_{IN} from 0 V to 8 V.
2. Step LOAD1 from 0 A to 20 A.
3. Record, V_{IN}, I_{IN}, V_{OUT} and I_{OUT} for each LOAD1 step.
4. Step V_{IN} from 8 V to 20 V.
5. Repeat 2 to 4 above for each V_{IN} step.
6. See Section 6.6 for equipment shut down.

See Section 7.1 and Section 7.2 for typical line and load regulation curves and efficiency results.

6.2 Output Ripple Measurement (TP5, TP13)

1. Set up EVM as described in Section 5.2 and Figure 2.
2. Set Oscilloscope to 1-MΩ input impedance, 20-MHz Bandwidth, ac coupling, 1-μs/div. horizontal resolution, 10-mV/div. vertical resolution.
3. Place the oscilloscope probe tip through TP5 and hold the ground barrel to TP13 as shown in Figure 3. For a hands free approach, the loop in TP13 can be cut and opened to cradle the probe barrel. V2 may have to be removed from these test points to allow the oscilloscope to be connected.
4. Increase V_{IN} to 8 V.
5. Vary LOAD1 from 0 A to 20 A and observe oscilloscope waveform.
6. Repeat 5 above for various V_{IN} values up to 20 V.
7. See Section 6.6 for equipment shut down.

See Section 7.3 for typical ripple voltage results

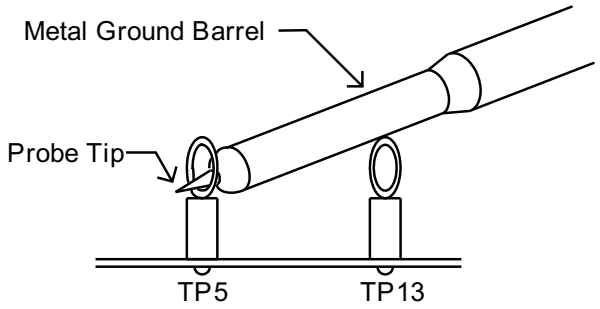


Figure 3. Output Ripple Measurement - Tip and Barrel Using TP5 and TP13

6.3 Loop Analysis (TP7, TP8, TP10)

TPS40195EVM contains a 1.30-kΩ series resistor in the feedback loop to allow for matched impedance signal injection into the feedback for loop response analysis.

1. Set up EVM as described in Section 5.2 and Figure 2
2. Connect input signal amplitude measurement probe (Channel A) to TP7 as shown in Figure 4
3. Connect output signal amplitude measurement probe (Channel B) to TP8 as shown in Figure 4
4. Connect ground lead of Channel A and Channel B to TP10 as shown in Figure 4
5. Inject 30 mV or less signal across R11 (TP7 and TP8) through an isolation transformer.
6. Sweep frequency from 100 Hz to 1 MHz with 10 Hz or lower post filter.
7. Control loop gain can be measured by 20 x Log (ChannelB/ChannelA).
8. Control loop phase is measured by the phase difference between Channel A and Channel B.
9. Disconnect Isolation transformer from TP7 and TP8 before making other measurements (signal injection into feedback may interfere with accuracy of other measurements).
10. See Section 6.6 for equipment shutdown.

See Section 7.5 for typical bode plots and transient performance of this EVM

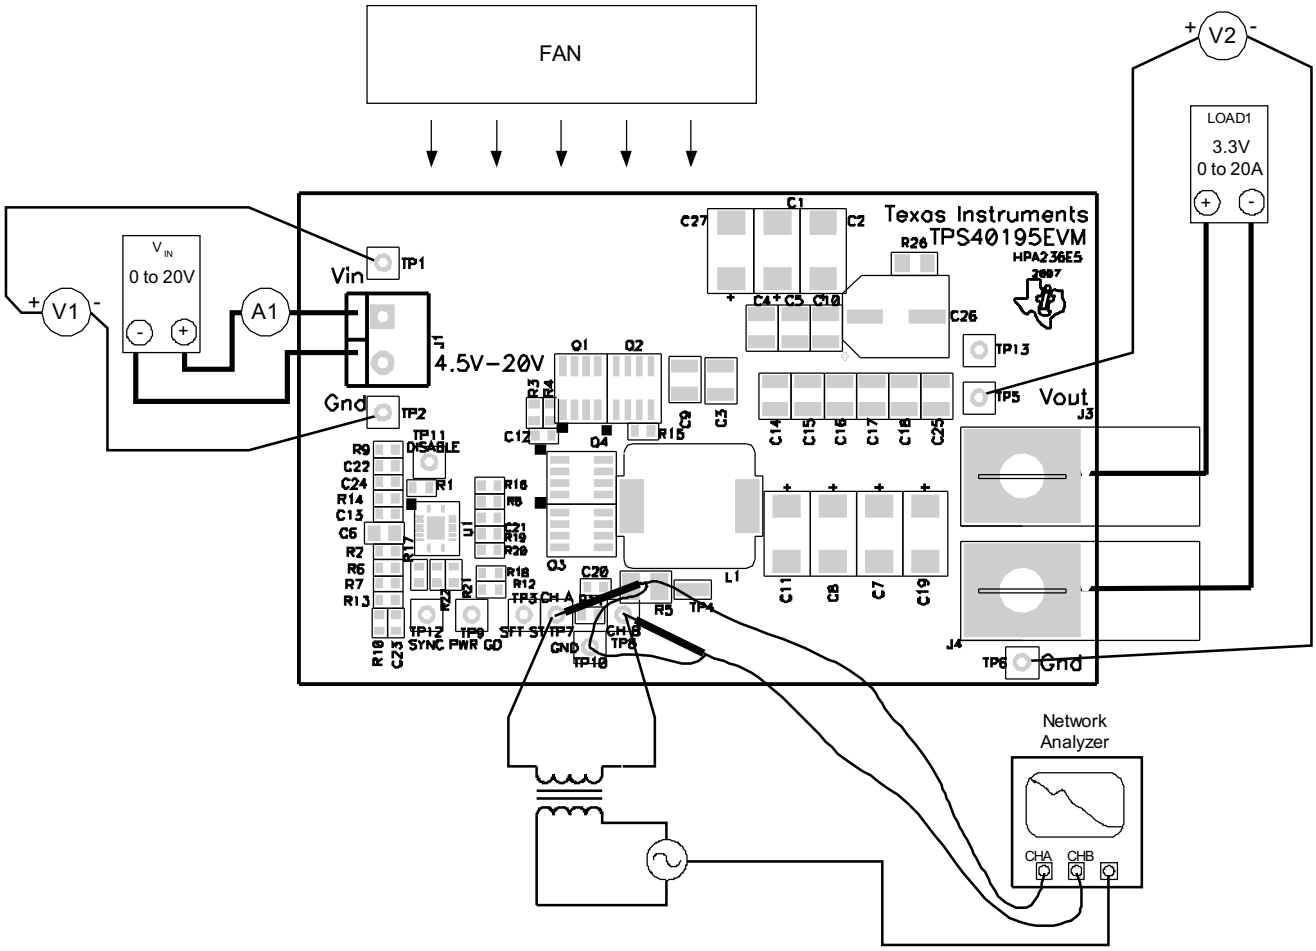


Figure 4. Control Loop Measurement Setup

6.4 Disable (TP11) and Power Good (TP9)

TPS40195EVM defaults to the Enabled state.

1. Set up EVM as described in Section 5.2 and Figure 2
2. Using a four channel oscilloscope monitor TP11, TP9 and TP5.
3. Increase V_{IN} to 8 V.
4. Set LOAD1 to 10 A.
5. Short TP11 to TP2, output should drop to zero.
6. Remove short, output should return to regulation.
7. Repeat 4 and 5 above for various V_{IN} and LOAD1 combinations.
8. See Section 6.6 for equipment shut down.

See Section 7.6 for typical disable and power good performance.

6.5 Switch Node (TP4) and SYNC (TP12)

1. Set up EVM as described in Section 5.2 and Figure 2
2. Use the oscilloscope to monitor TP4. Set Oscilloscope to 1-MΩ input impedance, 20-MHz Bandwidth, ac coupling, 1-µs/div. horizontal resolution, 5-V/div. vertical resolution.
3. Increase V_{IN} to 12 V.
4. Set LOAD1 to 10 A.
5. Vary LOAD1 and observe oscilloscope.
6. Vary V_{IN} and observe oscilloscope.
7. Set signal generator to 360 kHz and pulse shape per Figure 3.
8. Connect the signal generator to TP12.
9. Monitor TP12 and TP4 with the oscilloscope
10. Vary signal generator frequency from 360 kHz to 400 kHz.
11. See Section 6.6 for equipment shutdown.

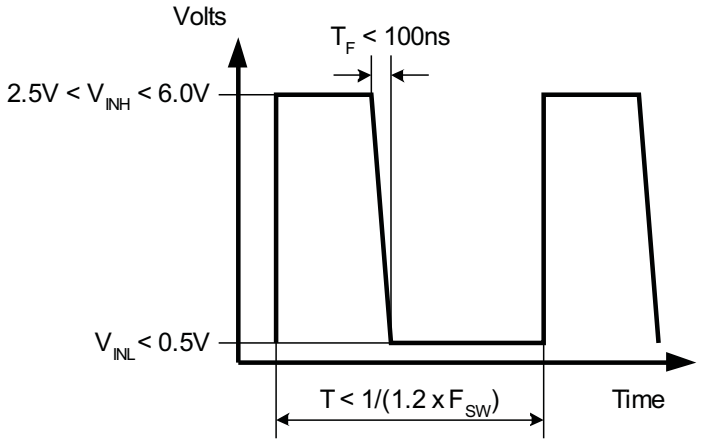


Figure 5. Typical TPS40195EVM SYNC Signal. The TPS40195 Synchronizes on the Falling Edge

6.6 Equipment SHUTDOWN

1. Shut down oscilloscope.
2. Shut down LOAD1.
3. Shut down V_{IN}.
4. Shut down fan.

7 TPS40195EVM TYPICAL PERFORMANCE DATA AND CHARACTERISTIC CURVES

Figure 6 through Figure 15 present typical performance curves for the TPS40195EVM. Since actual performance data can be affected by measurement techniques and environmental variables, these curves are presented for reference and may differ from actual field measurements.

7.1 Line and Load Regulation

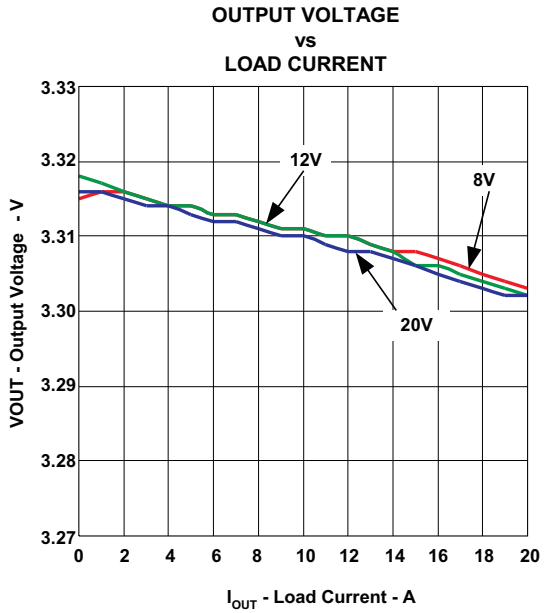


Figure 6. TPS40195EVM Line and Load Regulation V_{IN} = 8 V to 20 V, V_{OUT} = 3.3 V I_{OUT} = 0 A to 20 A

7.2 Efficiency

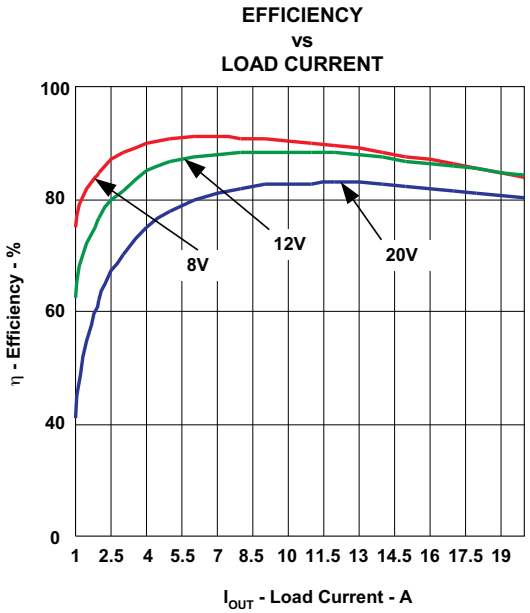


Figure 7. TPS40195EVM Efficiency V_{IN} = 8 V to 20 V, V_{OUT} = 3.3 V I_{OUT} = 1 A to 20 A

7.3 Output Voltage Ripple

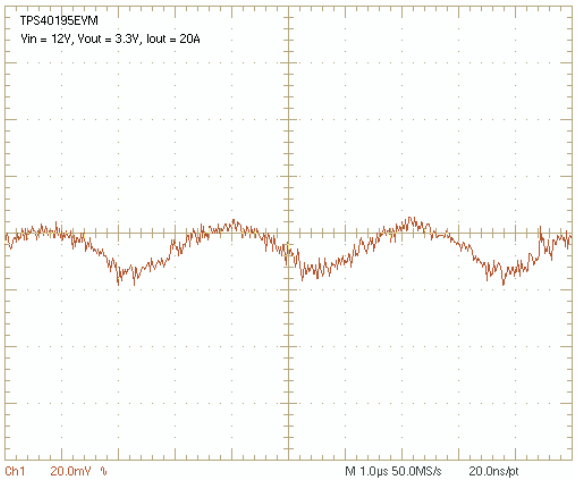


Figure 8. TPS40195EVM Output Voltage Ripple (V_{IN} = 12 V, I_{OUT} = 20 A)

7.4 Transient Response

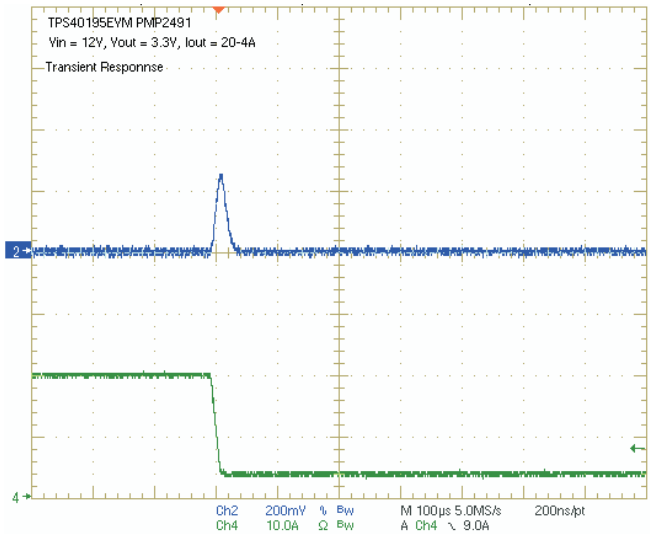


Figure 9. TPS40195EVM Transient Response, V_{IN} = 12 V, I_{OUT} = 20 A to 4 A, Ch1: I_{OUT}, Ch2: V_{OUT}

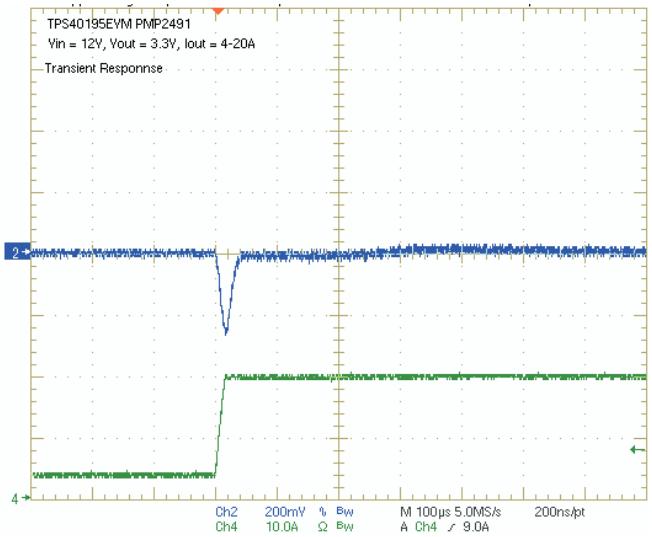


Figure 10. TPS40195EVM Transient Response, V_{IN} = 12 V, I_{OUT} = 4 A to 20 A, Ch1: I_{OUT}, Ch2: V_{OUT}

7.5 Bode Plots

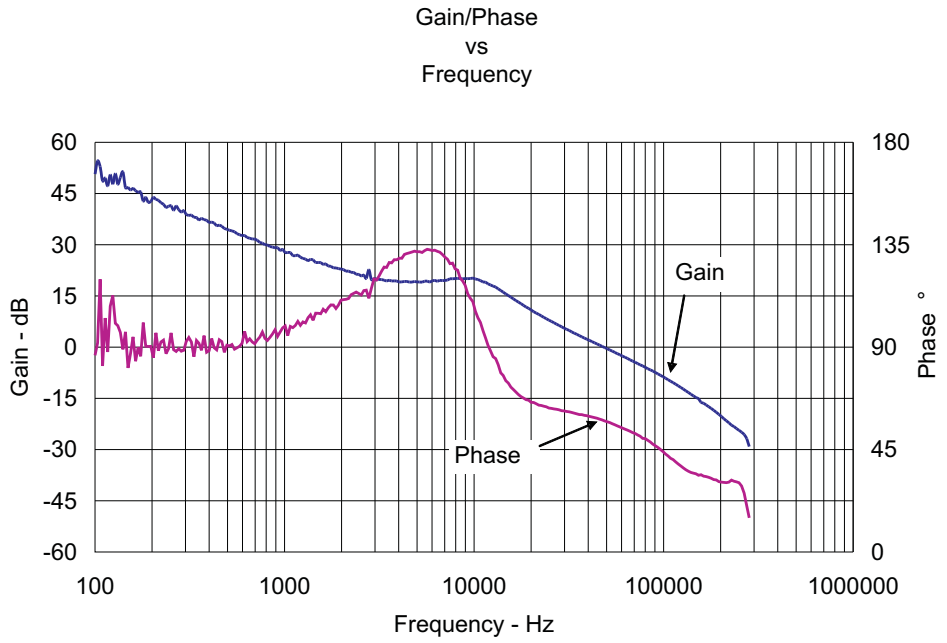


Figure 11. TPS40195EVM Bode Plot V_{IN} = 12 V, I_{OUT} = 20 A, Crossover Frequency = 48 kHz, Phase Margin = 57.5°

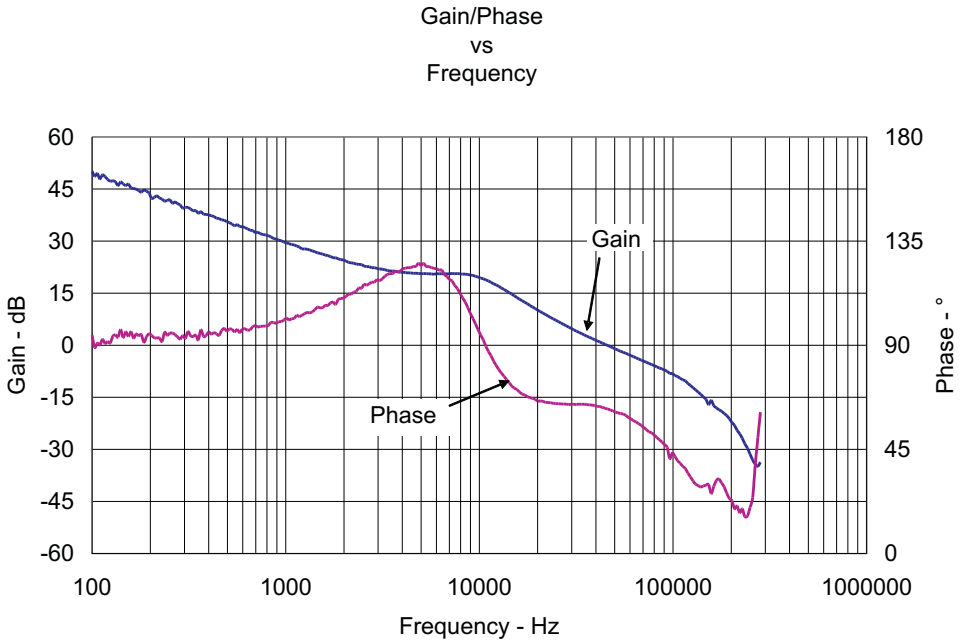


Figure 12. TPS40195EVM Bode Plot V_{IN} = 12 V, I_{OUT} = 0 A, Crossover Frequency = 46 kHz, Phase Margin = 62°

7.6 Test Point Waveforms

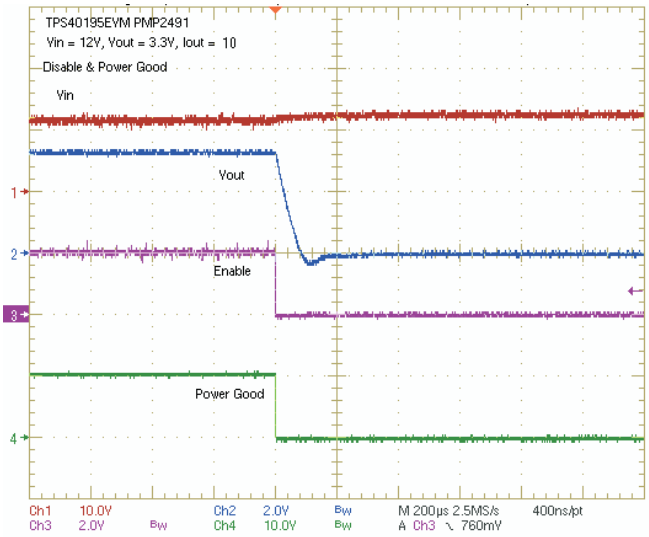


Figure 13. TPS40195EVM Disable and Power Good, V_{IN} = 12 V, I_{OUT} = 10 A, Ch1: TP1 (V_{IN}), Ch2: TP5 (V_{OUT}), Ch3: TP11 (ENABLE); Ch4: TP9 (Power Good)

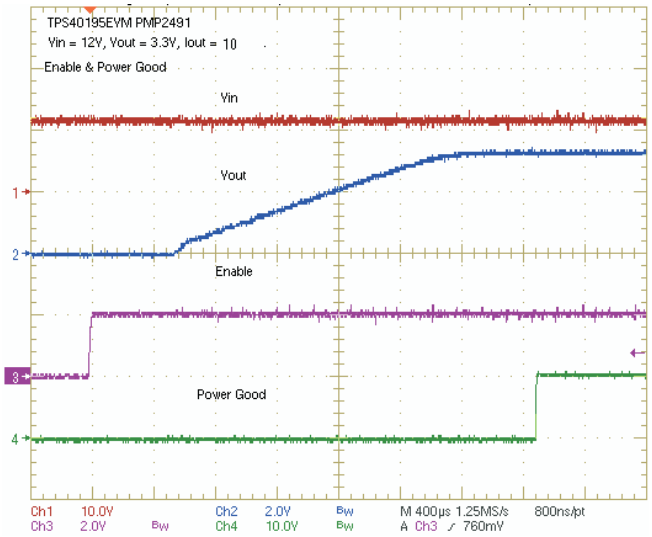


Figure 14. TPS40195EVM Enable and Power Good, V_{IN} = 12 V, I_{OUT} = 10 A, Ch1: TP1 (V_{IN}), Ch2: TP5 (V_{OUT}), Ch3: TP11 (ENABLE); Ch4: TP9 (Power Good)

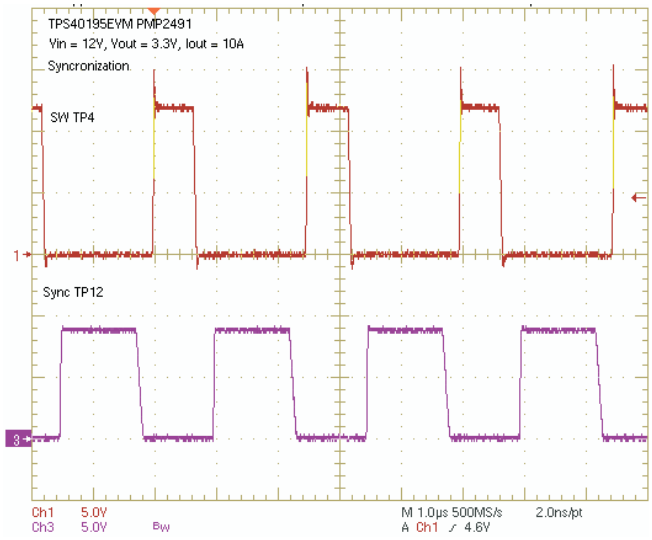


Figure 15. TPS40195EVM Switching Waveform (Ch1: TP4) and Synchronization (Ch2: TP12) V_{IN} = 12 V, I_{OUT} = 10 A, f_{SYNC} = 400 kHz

8 EVM ASSEMBLY DRAWINGS AND LAYOUT

The following figures (Figure 16 through Figure 18) show the design of the TPS40195EVM printed circuit board. The EVM has been designed using a 2-Layer, 2-oz copper-clad circuit board with all components on the top side. Moving components to both sides of the PCB or using additional internal layers can offer additional size reduction for space constrained systems.

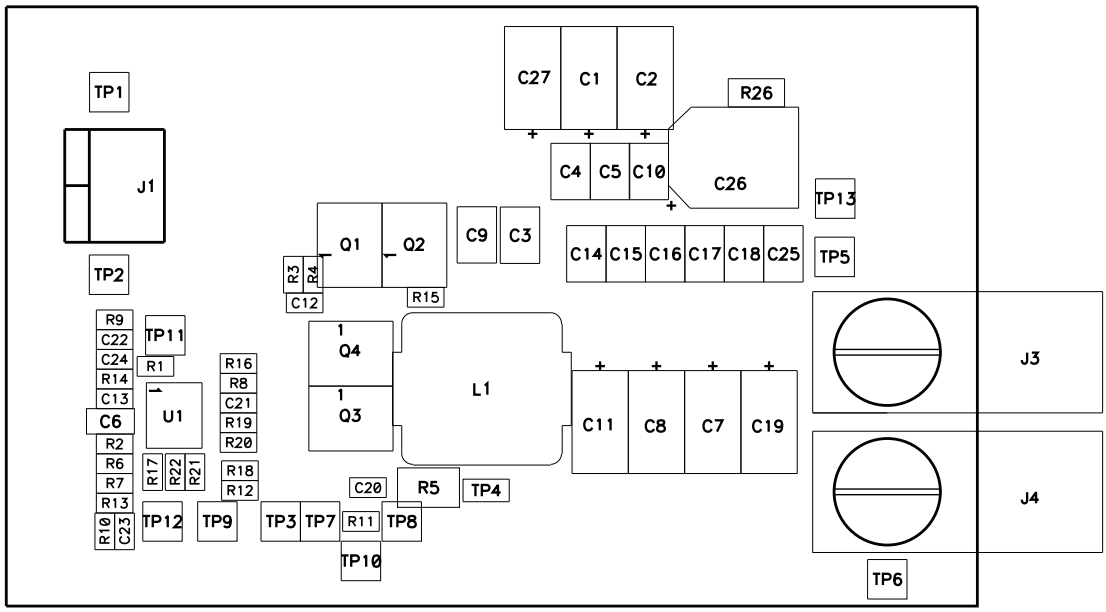


Figure 16. TPS40195EVM Component Placement (viewed from top)

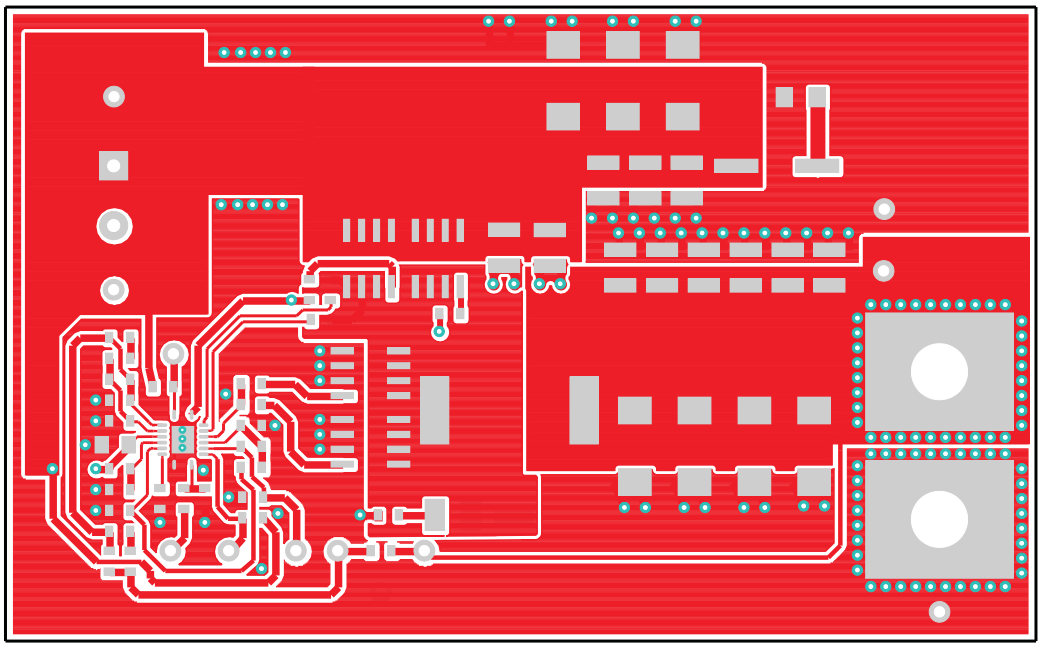


Figure 17. TPS40195EVM Top Copper (viewed from top)

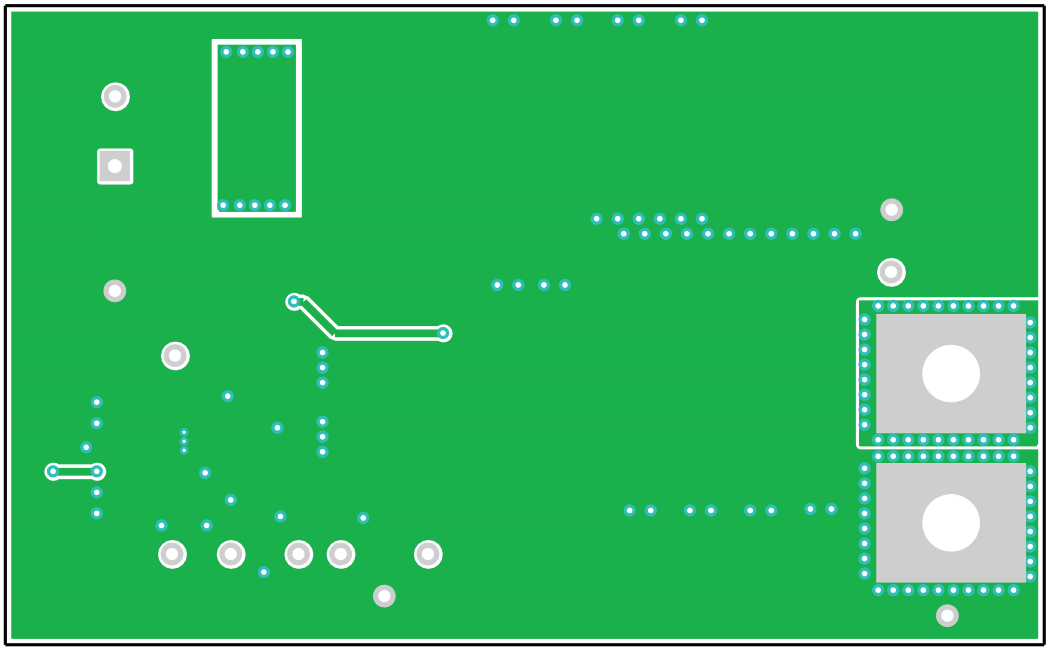


Figure 18. TPS40195EVM Bottom Copper (x-ray viewed from top)

9 LIST OF MATERIALS

Table 3 lists the EVM components as configured according to the schematic shown in Figure 1.

Table 3. TPS40195EVM List of Materials

COUNT	REF DES	DESCRIPTION	MFR	PART NUMBER
0	C1, C2, C7, C8, C11, C19, C27	Capacitor, aluminum, 20% (UE Series)	Panasonic	EEF-UEvvxxxR
1	C12	Capacitor, ceramic, 1.0 µF, 6.3 V, X7R, 10%, 0603	Std	Std
0	C13	Capacitor, ceramic, OPEN	Std	Std
6	C14, C15, C16, C17, C18, C25	Capacitor, ceramic, 47 µF, 6.3 V, X5R, 20%, 1210	Std	Std
1	C20	Capacitor, ceramic, 4700 pF, 50 V, [X7R, 10%, 0603	Std	Std
1	C21	Capacitor, ceramic, 10 µF, 6.3 V, X5R, 10%, 0603	Std	Std
1	C22	Capacitor, ceramic, 680 pF, 50 V, X7R, 10%, 0603	Std	Std
1	C23	Capacitor, ceramic, 100 pF, 50 V, COG, 5%, 0603	Std	Std
1	C24	Capacitor, ceramic, 10 pF, 50 V, NPO, 5%, 0603	Std	Std
1	C26	Capacitor, aluminum, 25 V, 20%, 160 mΩ	Panasonic	EEVFK1E331P
5	C3, C4, C5, C9, C10	Capacitor, ceramic, 10 µF, 25 V, X7R, 20%, 1210	Std	Std
1	C6	Capacitor, ceramic, 1.0 µF, 25 V, X7R, 10%, 0805	Std	Std
1	L1	Inductor, SMT, 27 A, 3.0 mΩ	Vishay	IHLP5050FDER1R5M01
2	Q1, Q2	MOSFET, N-channel, 30 V, 11 A, 9.1 mΩ	IR	IRF7821
2	Q3, Q4	MOSFET, N-channel, 30 V, 16 A, 4.0 mΩ	IR	IRF7832
3	R1, R10, R12	Resistor, chip, 100 kΩ, 1/16 W, 1%	Std	Std
1	R11	Resistor, chip, 1.30 kΩ, 1/16 W, 1%	Std	Std
1	R13	Resistor, chip, 3.01 kΩ, 1/16 W, 1%	Std	Std
1	R14	Resistor, chip, 22.1 kΩ, 1/16 W, 1%	Std	Std
1	R17	Resistor, chip, 10.0 kΩ, 1/16 W, 1%	Std	Std
0	R18, R19, R20, R21	Resistor, chip, xxx Ω, 1/16 W, 1%	Std	Std
1	R2	Resistor, chip, 200 kΩ, 1/16 W, 1%	Std	Std
1	R22	Resistor, chip, 0 Ω, 1/16 W	Std	Std
1	R26	Resistor, chip, 0.15 Ω, 1/8 W, 5%	Std	Std
4	R3, R8, R15, R16	Resistor, chip, 1.0 Ω, 1/16 W, 5%	Std	Std
1	R4	Resistor, chip, 2.0 Ω, 1/16 W, 5%	Std	Std
1	R5	Resistor, chip, 1.0 Ω, 1210, 5%	Std	Std
1	R6	Resistor, chip, 42.2 kΩ, 1/16 W, 1%	Std	Std
1	R7	Resistor, chip, 82.5 kΩ, 1/16 W, 1%	Std	Std
1	R9	Resistor, chip, 49.9 kΩ, 1/16 W, 1%	Std	Std
1	U1	TPS40195, 4.5-V to 20-V Sync buck controller with sync and pgood	TI	TPS40195RGY

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		**Applications**	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DSP	dsp.ti.com	Broadband	www.ti.com/broadband
Clocks and Timers	www.ti.com/clocks	Digital Control	www.ti.com/digitalcontrol
Interface	interface.ti.com	Medical	www.ti.com/medical
Logic	logic.ti.com	Military	www.ti.com/military
Power Mgmt	power.ti.com	Optical Networking	www.ti.com/opticalnetwork
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
RFID	www.ti-rfid.com	Telephony	www.ti.com/telephony
RF/IF and ZigBee® Solutions	www.ti.com/lprf	Video & Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2008, Texas Instruments Incorporated