


Standard Rectifier Module

3~ Rectifier	
V_{RRM}	= 1400 V
I_{DAV}	= 150 A
I_{FSM}	= 1800 A


3~ Rectifier Bridge

Part number

VUO125-14NO7



 E72873



Features / Advantages:

- Package with DCB ceramic
- Improved temperature and power cycling
- Planar passivated chips
- Very low forward voltage drop
- Very low leakage current

Applications:


- Diode for main rectification
- For three phase bridge configurations
- Supplies for DC power equipment
- Input rectifiers for PWM inverter
- Battery DC power supplies
- Field supply for DC motors

Package: PWS-C

- Industry standard outline
- RoHS compliant
- Easy to mount with two screws
- Base plate: Copper internally DCB isolated
- Advanced power cycling


Rectifier				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
V_{RSM}	max. non-repetitive reverse blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				1500	V
V_{RRM}	max. repetitive reverse blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				1400	V
I_R	reverse current	$V_R = 1400\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			200	μA
		$V_R = 1400\text{ V}$	$T_{VJ} = 150^{\circ}\text{C}$			2	mA
V_F	forward voltage drop	$I_F = 50\text{ A}$	$T_{VJ} = 25^{\circ}\text{C}$			1.07	V
		$I_F = 150\text{ A}$				1.34	V
		$I_F = 50\text{ A}$	$T_{VJ} = 125^{\circ}\text{C}$			0.97	V
		$I_F = 150\text{ A}$				1.31	V
I_{DAV}	bridge output current	$T_C = 110^{\circ}\text{C}$	$T_{VJ} = 150^{\circ}\text{C}$			150	A
		rectangular $d = 1/3$					
V_{FO}	threshold voltage	} for power loss calculation only				0.76	V
r_F	slope resistance					3.6	m Ω
R_{thJC}	thermal resistance junction to case					0.6	K/W
R_{thCH}	thermal resistance case to heatsink				0.30		K/W
P_{tot}	total power dissipation	$T_C = 25^{\circ}\text{C}$				205	W
I_{FSM}	max. forward surge current	$t = 10\text{ ms; (50 Hz), sine}$	$T_{VJ} = 45^{\circ}\text{C}$			1.80	kA
		$t = 8,3\text{ ms; (60 Hz), sine}$	$V_R = 0\text{ V}$			1.95	kA
		$t = 10\text{ ms; (50 Hz), sine}$	$T_{VJ} = 150^{\circ}\text{C}$			1.53	kA
		$t = 8,3\text{ ms; (60 Hz), sine}$	$V_R = 0\text{ V}$			1.65	kA
I^2t	value for fusing	$t = 10\text{ ms; (50 Hz), sine}$	$T_{VJ} = 45^{\circ}\text{C}$			16.2	kA ² s
		$t = 8,3\text{ ms; (60 Hz), sine}$	$V_R = 0\text{ V}$			15.7	kA ² s
		$t = 10\text{ ms; (50 Hz), sine}$	$T_{VJ} = 150^{\circ}\text{C}$			11.7	kA ² s
		$t = 8,3\text{ ms; (60 Hz), sine}$	$V_R = 0\text{ V}$			11.3	kA ² s
C_J	junction capacitance	$V_R = 400\text{ V; } f = 1\text{ MHz}$	$T_{VJ} = 25^{\circ}\text{C}$		58		pF

Package PWS-C				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
I _{RMS}	RMS current	per terminal				150	A
T _{stg}	storage temperature			-40		125	°C
T _{vj}	virtual junction temperature			-40		150	°C
Weight					250		g
M _D	mounting torque			4.25		5.75	Nm
M _T	terminal torque			4.25		5.75	Nm
d _{Spp/App}	creepage distance on surface striking distance through air	terminal to terminal		26.0			mm
d _{Spb/Apb}		terminal to backside		14.0			mm
V _{ISOL}	isolation voltage	t = 1 second	50/60 Hz, RMS; I _{ISOL} ≤ 1 mA	3000			V
		t = 1 minute		2500			V

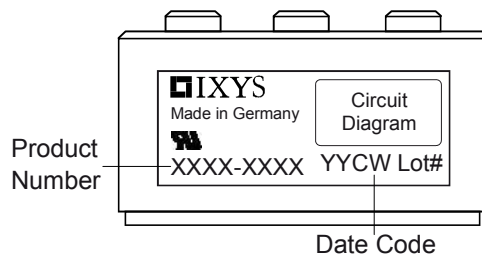


Ordering	Part Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	VUO125-14NO7	VUO125-14NO7	Box	10	456772

Equivalent Circuits for Simulation * on die level $T_{vj} = 150^\circ\text{C}$

		Rectifier	
$V_{0\max}$	threshold voltage	0.76	V
$R_{0\max}$	slope resistance *	2.4	mΩ

Outlines PWS-C

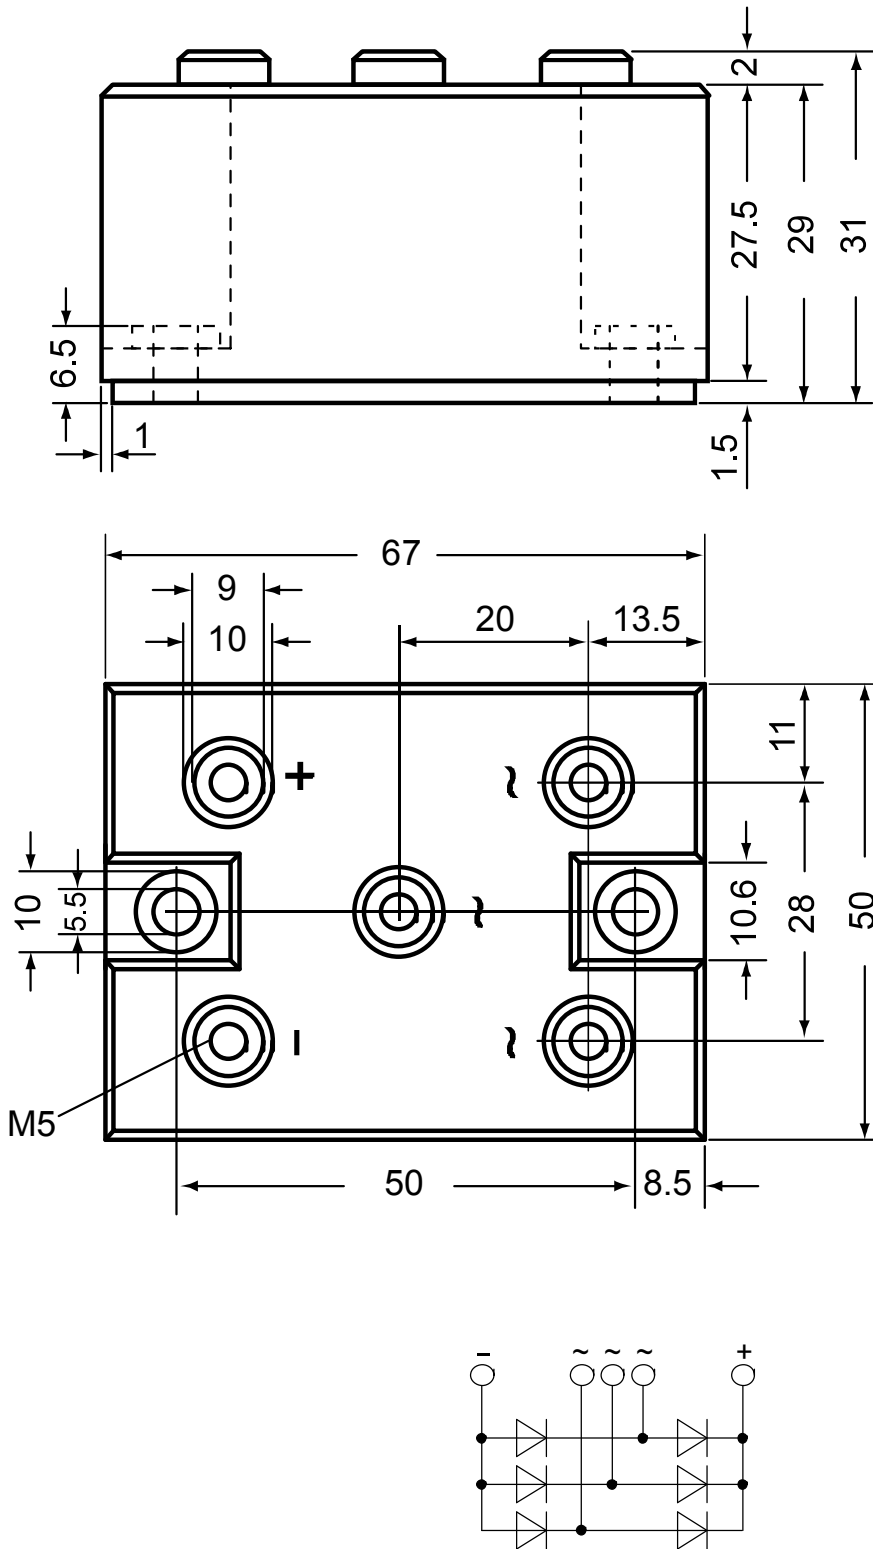

Rectifier

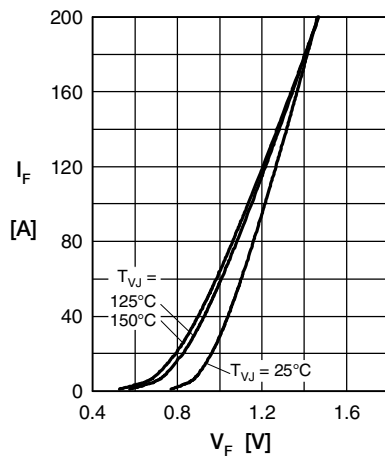


Fig. 1 Forward current versus voltage drop per diode

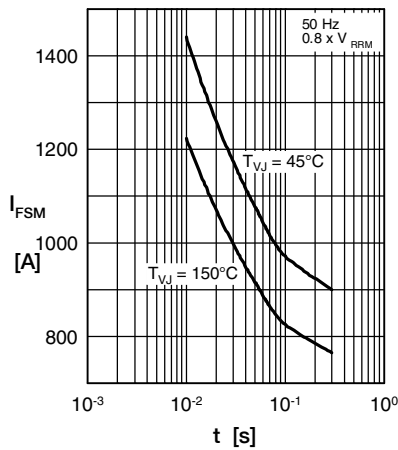


Fig. 2 Surge overload current vs. time per diode

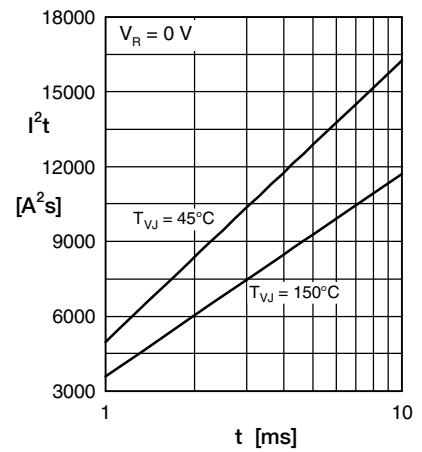


Fig. 3 I^2t versus time per diode

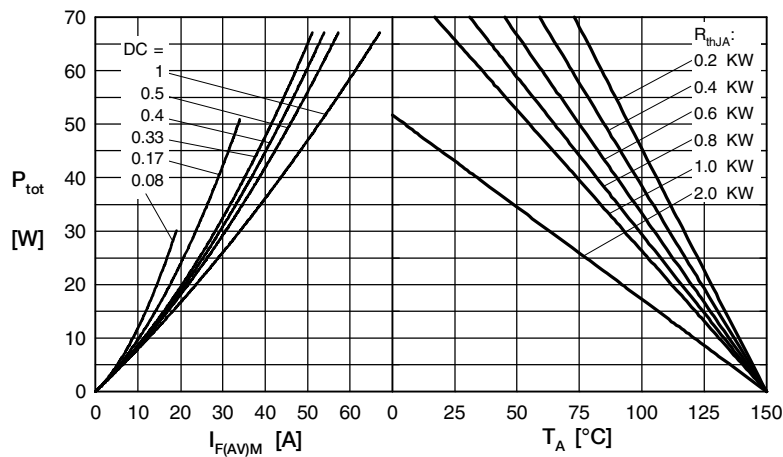


Fig. 4 Power dissipation vs. forward current and ambient temperature per diode

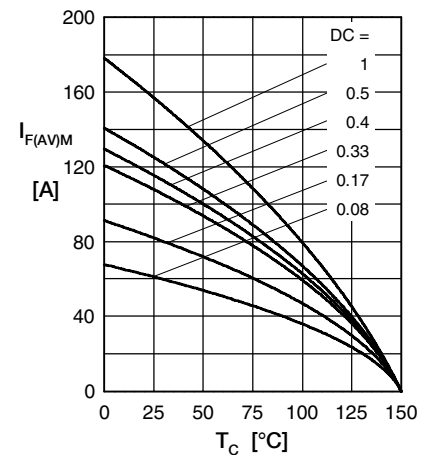


Fig. 5 Max. forward current vs. case temperature per diode

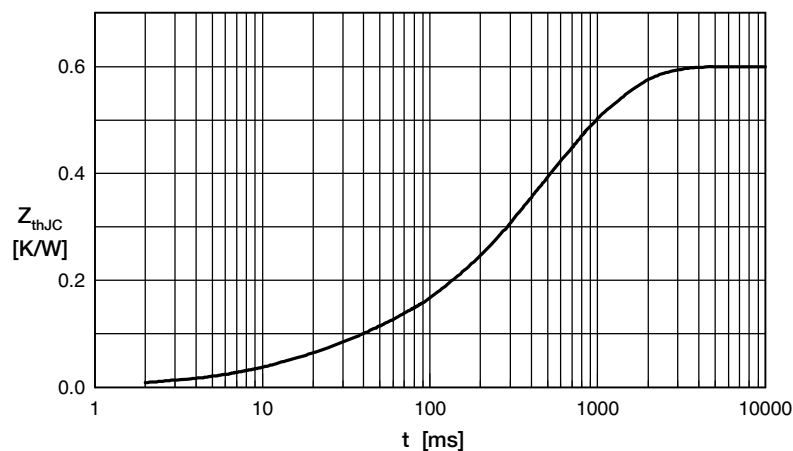


Fig. 6 Transient thermal impedance junction to case vs. time per diode

Constants for Z_{thJC} calculation:

i	R_{th} (K/W)	t_i (s)
1	0.060	0.020
2	0.003	0.010
3	0.150	0.225
4	0.243	0.800
5	0.144	0.580