XFMRS DIGITAL AUDIO TRANSFORMERS

XFMRS Group is proud to introduce it's broad line of Digital Audio Transformers. XFMRS offers transformers to work with AKM, Cirrus (Crystal), Motorola, TI, and Yamaha chip sets. These tranformers are designed for fast rise time (25nS Max), low jitter, high common mode noise rejection, and the lowest interwinding capacitance. Various packages are availabe for frequencies from 48-192KHz.

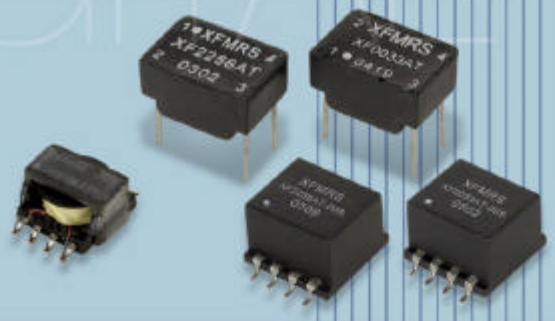

Part Number	Primary Inductance (uH)	Max Pri LL (uH)	Max DCR (Ohms)	Turns Ratio (Pri:Sec)	Isolation Voltage (Vac)	Freq. (KHz)
XF0033AT	2500±20%	0.50	tbd	1:1±3%	1500	48
XF0033AT-00S	2500±20%	0.50	tbd	1:1±3%	1500	48
XF2256AT	225 Min	0.30	0.400	1:1±3%	1500	96
XF2256AT-00S	225 Min	0.50	0.100	1:1±5%	1500	96
XF5756-ER9	500 Min	0.50	0.210	1:1±1%	1000	192
XF6656-ER9	665 Min	tbd	0.275	2:1±1%	1000	192

XF0033AT

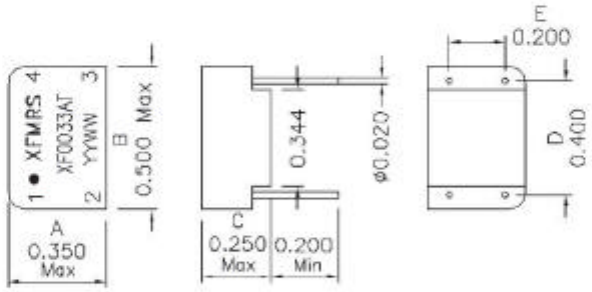

XF0033AT-00S

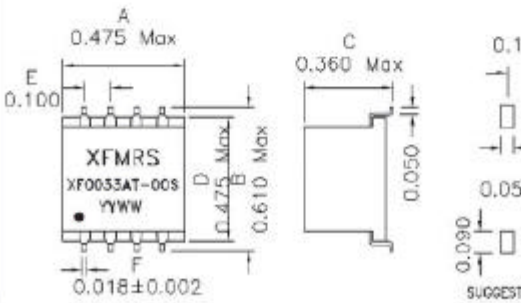

XFMRS

XFMRS INC. 7570 E. Landersdale Road • Camby, Indiana 46113 • TEL: (317) 834-1066 • FAX: (317) 834-1067
XFMRS, LTD. Block G,H,I & J, 3/F., Phase 1, Golden Dragon Ind. Centre 152-160 Tai Lin Pai Road Kwai Chung, N.T., Hong Kong TEL: (852) 2423-1688 • FAX: (852) 2420-3236
XFMRS - EUROPE 4 Gravel Pit Lane, Yarnton,Oxford, U.K. OX5 1PX • TEL / FAX: 44 (0) 1865-374690

www.XFMRS.com

E-mail: xfmrsinc@aol.com

XFMRS

DIGITAL AUDIO TRANSFORMERS

XF2256AT

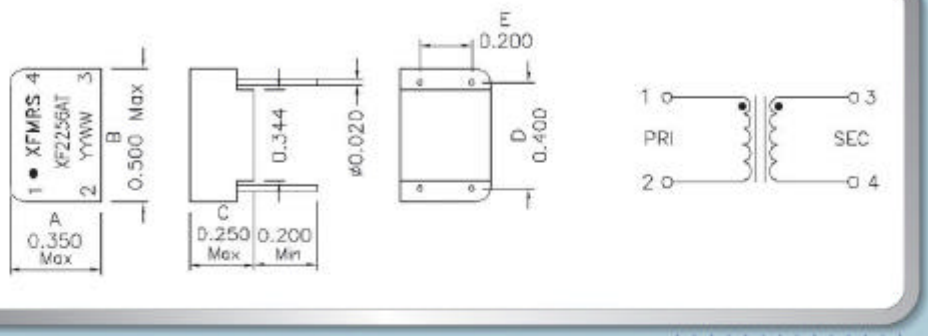

XF2256AT-00S

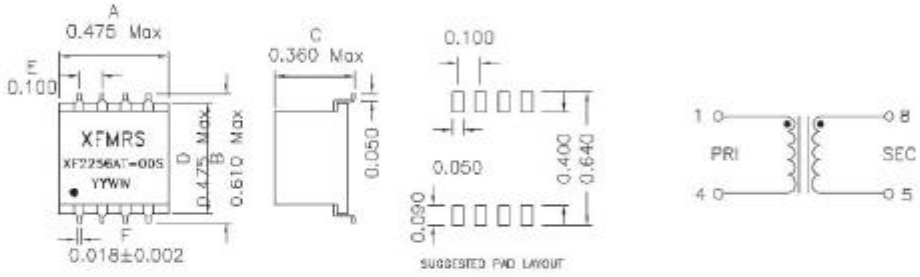

XF5756-ER9

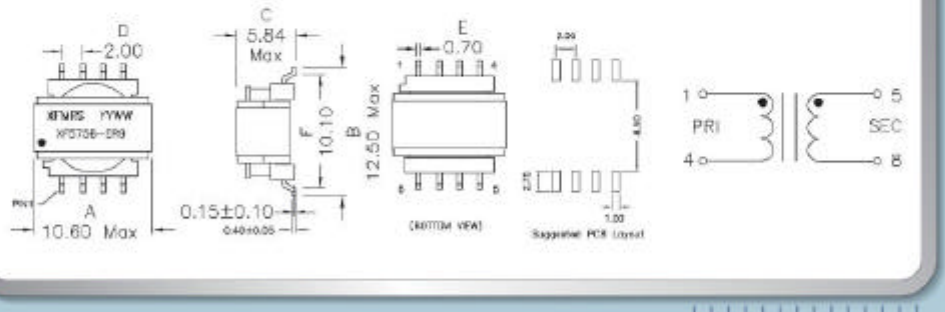

XF6656-ER9

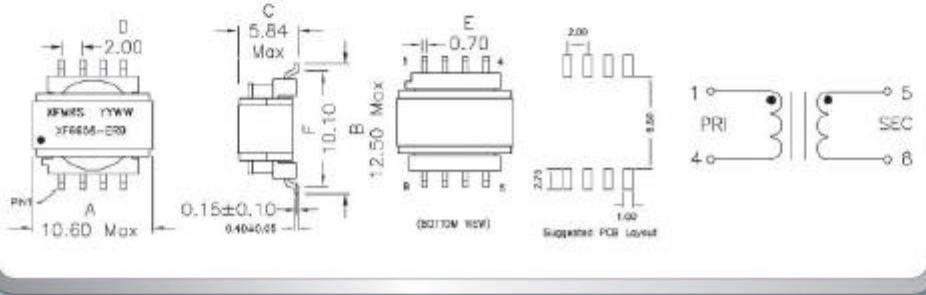

XFMRS

www.XFMRS.com

XFMRS INC. 7570 E. Landersdale Road • Camby, Indiana 46113 • TEL: (317) 834-1066 • FAX: (317) 834-1067

XFMRS, LTD. Block G,H,I & J, 3/F., Phase 1, Golden Dragon Ind. Centre 152-160 Tai Lin Pai Road Kwai Chung, N.T., Hong Kong TEL: (852) 2423-1689 • FAX: (852) 2420-3236

XFMRS - EUROPE 4 Gravel Pit Lane, Yarnton,Oxford, U.K. OX5 1PX • TEL / FAX: 44 (0) 1865-374690

E-mail: xfmrsinc@aol.com