

M62294FP

3.3 V, 2.0 V Fixed 2-Output Voltage DC/DC Converter

REJ03D0854-0200

Rev.2.00

Jun 14, 2006

Description

M62294FP is 3.3 V and 2.0 V fixed stable 2-output step-down DC/DC converter.

It is possible to simplify peripheral circuit and to design compact and low cost sets because this device includes peripheral devices in small size 8-pin package.

The IC also has Reset circuit with time delay that monitors power supply ($V_{CC} = 5\text{ V}$) and one regulator output ($V_{out1} = 3.3\text{ V}$; IN1 terminal), therefore an application system is protected system errors.

Especially this is most suitable for application system with microprocessor and ASIC.


Features

- 3.3 V and 2.0 V step-down converter
- 4 to 15 V wide input supply voltage ($V_{CC} = 5\text{ V typ.}$)
- Reset circuit with time delay monitors
- Supply voltage ($V_{CC} = 5\text{ V}$) and regulator output (3.3 V)
- 110 kHz fixed frequency oscillator without peripheral devices
- 8-pin SOP package


Application

Application system with microprocessor and ASIC

Block Diagram

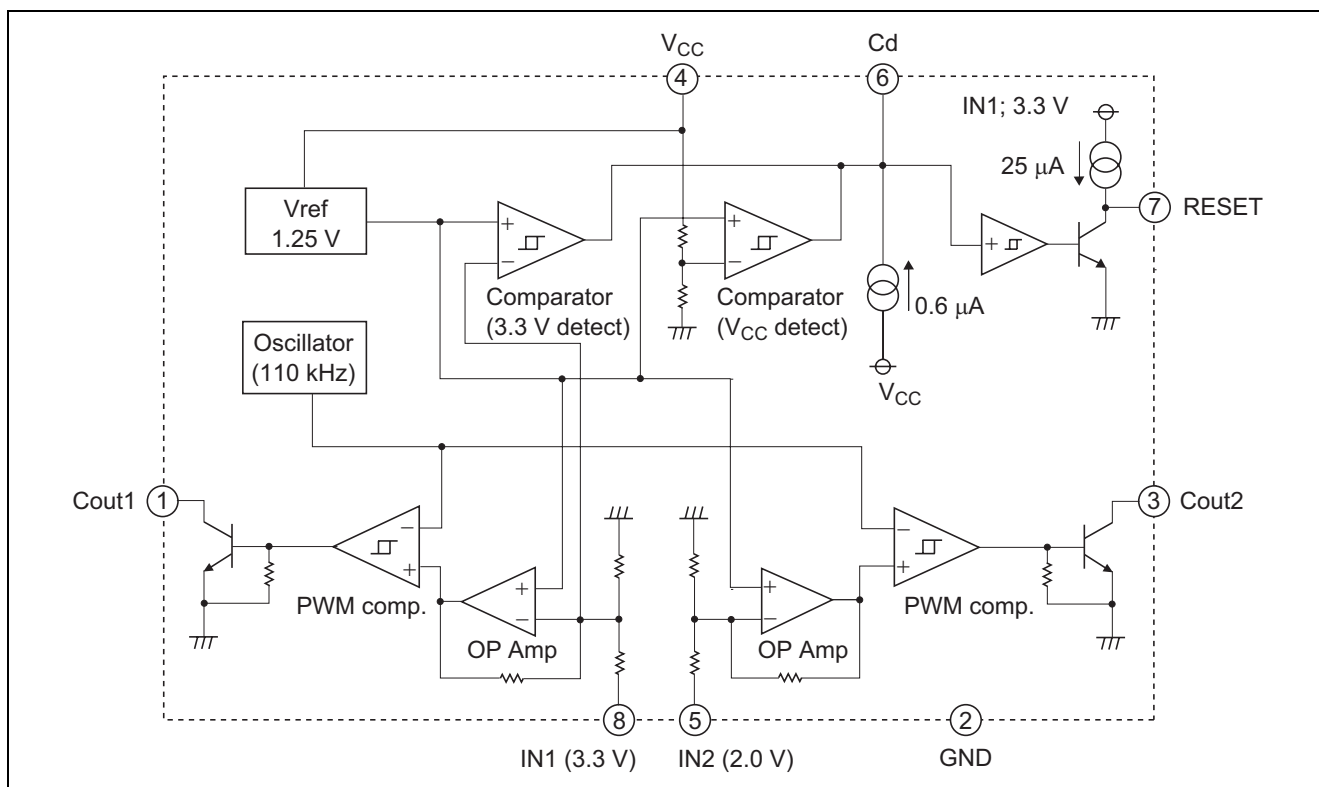

Pin Arrangement

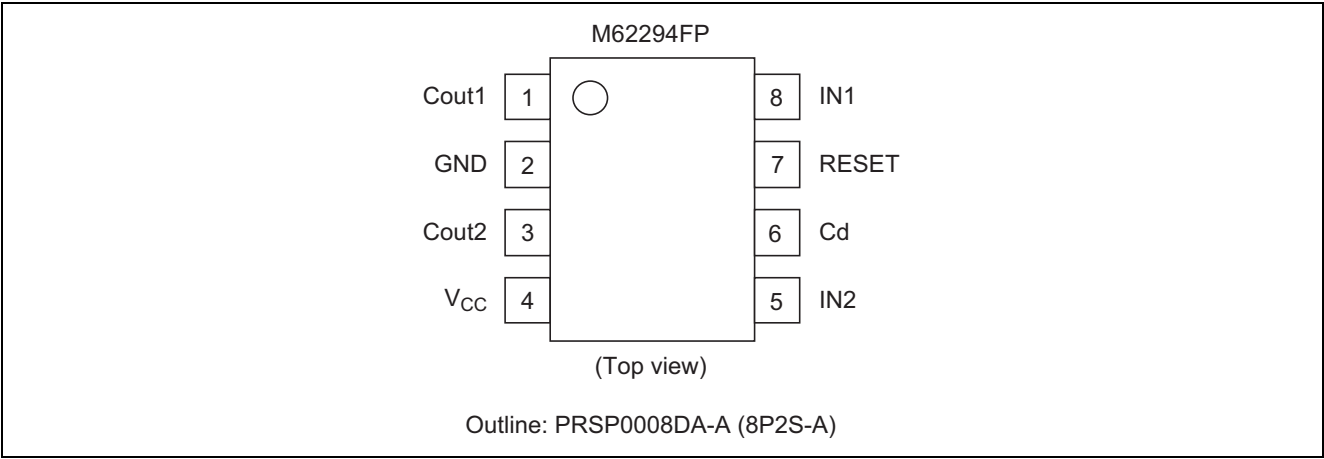

Absolute Maximum Ratings

(Ta = 25°C, unless otherwise noted)


Item	Symbol	Ratings	Unit	Conditions
Supply voltage	V _{CC}	16	V	
Output current (DC/DC converter block)	I _O	30	mA	ch1, ch2
Output current (Reset block)	I _{ORESET}	6	mA	
Power dissipation	P _d	440	mW	Ta = 25°C
Thermal derating	K _θ	4.4	mW/°C	Ta > 25°C
Operating temperature	Topr	−20 to +85	°C	
Storage temperature	Tstg	−40 to +125	°C	

Electrical Characteristics


(Ta = 25°C, V_{CC} = 5 V, unless otherwise noted)

Block	Item	Symbol	Limits			Unit	Test Condition
			Min	Typ	Max		
All Blocks	Supply voltage	V _{CC}	4.0	5.0	15	V	
	Supply current	I _{CC}	—	1.5	2.8	mA	Without load
DC/DC converter block							
Error Amp.	Output voltage	V _{O1}	3.15	3.30	3.45	V	ch1 output
		V _{O2}	1.90	2.00	2.10		ch2 output
	Line regulation	V _{reg-L}	—	5	15	mV	V _{CC} = 4 to 12 V
	Input current 1	I _{in}	—	150	450	μA	ch1
	Input current 2	I _{in}	—	100	300	μA	ch2
Oscillator	Oscillator frequency	f _{OSC}	65	110	160	kHz	
Output	Maximum on duty	T _{DUTY}	—	90	—	%	
	Output leakage current	I _{CL}	−1	—	1	V	V _{CC} = 12 V, V _C = 12 V
	Output saturation voltage	V _{sat}	—	1.2	2.0	V	I _O = 10 mA, Darlington connection
Reset circuit block							
Reset circuit	Detecting voltage 1	V _{S1}	3.6	3.8	4.0	V	V _{CC} = 5 V detection
	Hysteresis voltage 1	ΔV _{S1}	30	50	80	mV	
	Detecting voltage 2	V _{S2}	2.46	2.58	2.70	V	ch1 output (3.3 V) detection
	Hysteresis voltage 2	ΔV _{S2}	30	50	80	mV	
	Cd output current	I _{PD}	−1.1	−0.6	−0.3	μA	
	Delay time	t _{pd}	5	10	20	ms	Cd = 4700 pF
	RESET output current	I _{OC}	−40	−25	−17	μA	V _{CC} = 5 V, V _O = 1/2 × V _{CC}
	RESET low voltage	V _{OL}	—	—	0.2 V _{O1}	V	I _{ORESET} = 4 mA
	RESET high voltage	V _{OH}	0.8 V _{O1}	—	—	V	

Reset Block Timing Chart

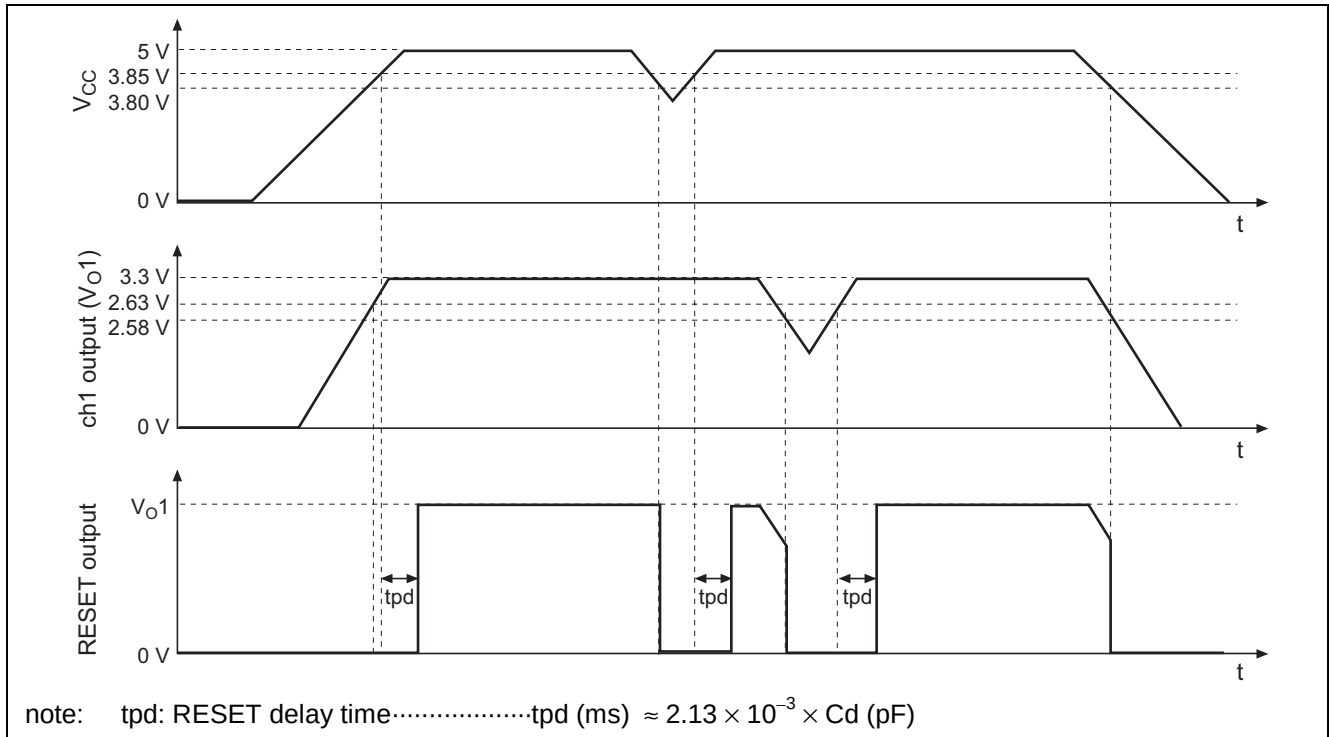

Application Circuit (3.3 V and 2.0 V 2-output Voltage DC/DC Converter)

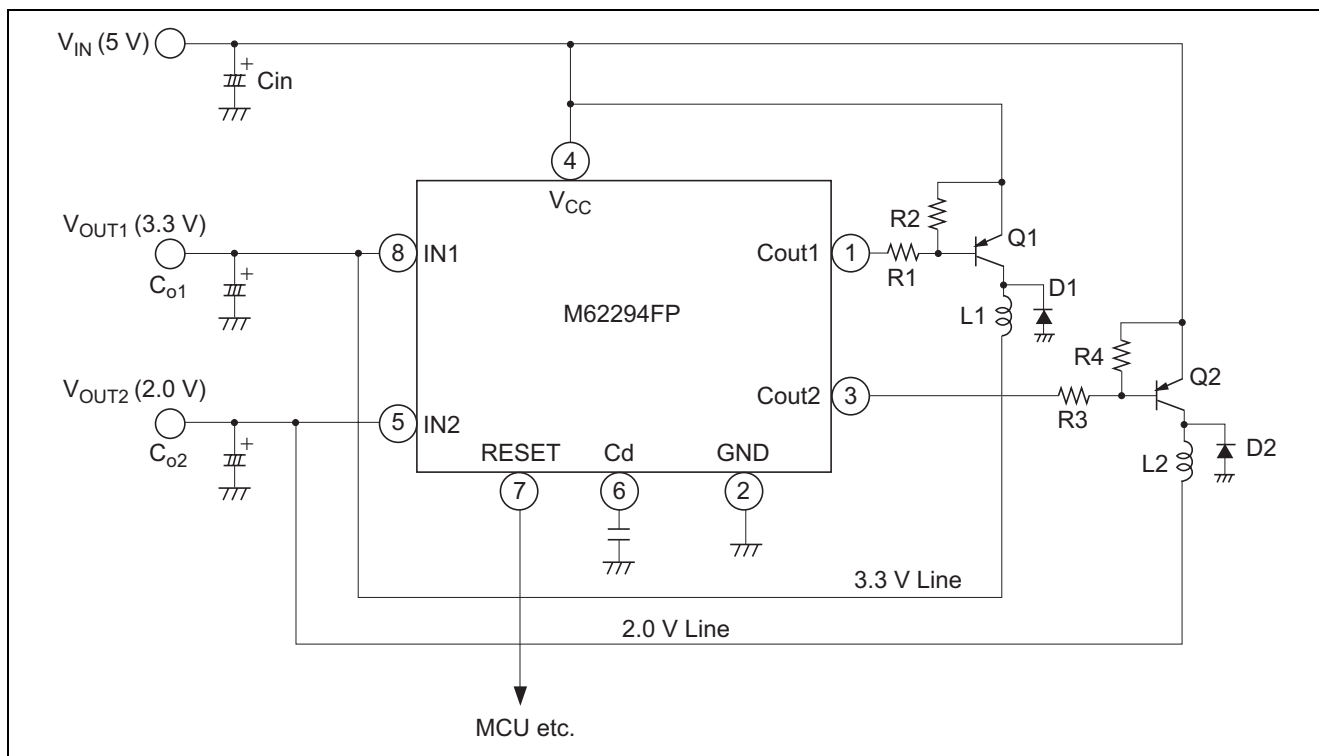

The Expression of Circuit Constants

Constants	Expressions
$\frac{T_{ON}}{T_{OFF}}$	$\frac{V_O + V_F}{V_{IN} - V_{CE(sat)} - V_O}$
$(T_{ON} + T_{OFF})_{MAX}$	$\frac{1}{f_{OSC}} f_{OSC}: 110 \text{ kHz } (V_{CC} = 5 \text{ V})$
$T_{OFF} (MIN)$	$(T_{ON} + T_{OFF}) / (1 + \frac{T_{ON}}{T_{OFF}})$
$T_{ON} (MAX)$	$\frac{1}{f_{OSC}} - T_{OFF}$
$L (MIN)$	$\frac{(V_{IN} - V_{CE(sat)} - V_O) \times T_{ON} (MAX)}{\Delta I_O}$
I_{pk}	$I_O + \frac{1}{2} \Delta I_O$


Note: V_F : Forward voltage drop of an external diode.

V_{sat} : Output saturation voltage of an external switching transistor.

ΔI_O : Set to 1/3 to 1/5 of maximum output current.

Choose an external transistor, diode and inductor with peak current rating approximately greater than " I_{pk} ".

Package Dimensions

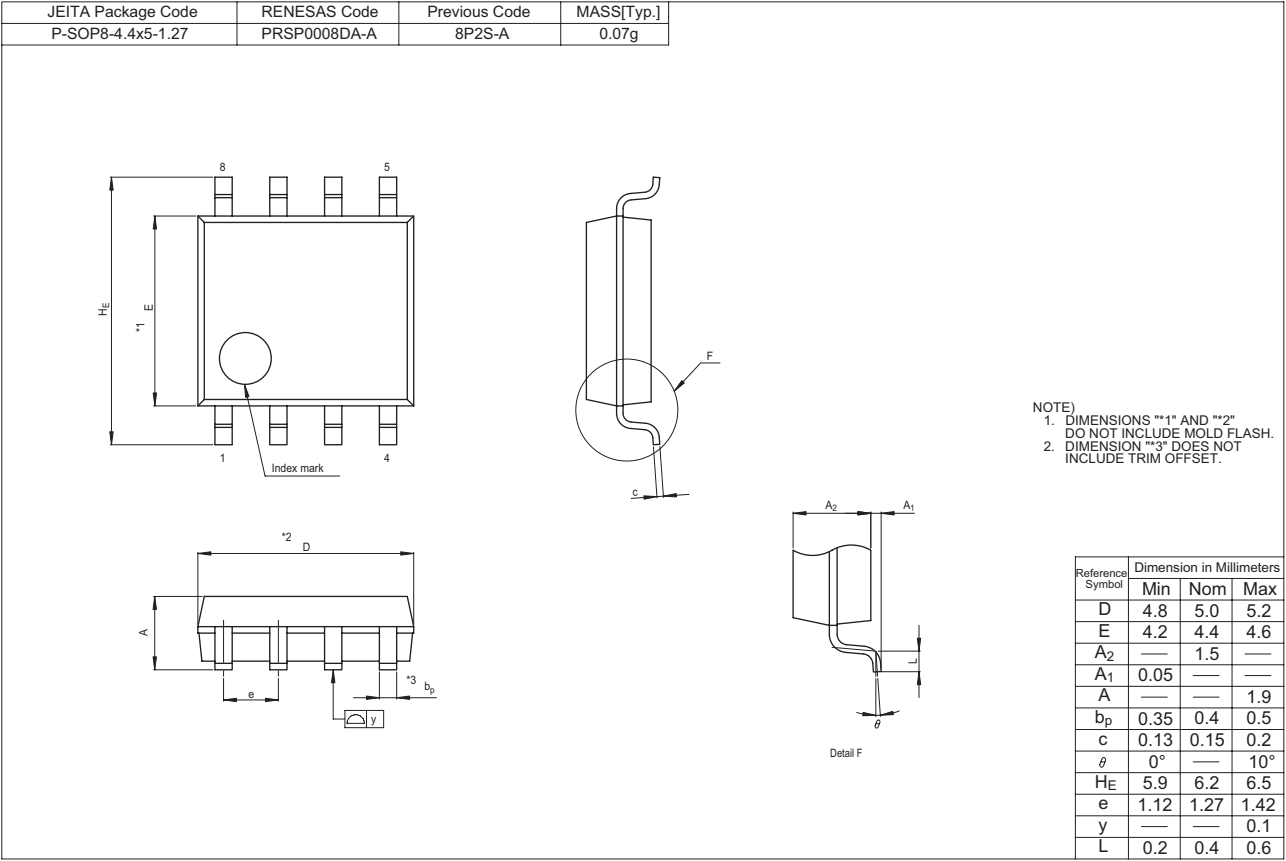

Renesas Technology Corp. Sales Strategic Planning Div. Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan

Keep safety first in your circuit designs!

1. Renesas Technology Corp. puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage.
Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of nonflammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

1. These materials are intended as a reference to assist our customers in the selection of the Renesas Technology Corp. product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Renesas Technology Corp. or a third party.
2. Renesas Technology Corp. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
3. All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Renesas Technology Corp. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor for the latest product information before purchasing a product listed herein.
The information described here may contain technical inaccuracies or typographical errors.
Renesas Technology Corp. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.
Please also pay attention to information published by Renesas Technology Corp. by various means, including the Renesas Technology Corp. Semiconductor home page (<http://www.renesas.com>).
4. When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Renesas Technology Corp. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.
5. Renesas Technology Corp. semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
6. The prior written approval of Renesas Technology Corp. is necessary to reprint or reproduce in whole or in part these materials.
7. If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.
Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
8. Please contact Renesas Technology Corp. for further details on these materials or the products contained therein.



RENESAS SALES OFFICES

<http://www.renesas.com>

Refer to "<http://www.renesas.com/en/network>" for the latest and detailed information.

Renesas Technology America, Inc.

450 Holger Way, San Jose, CA 95134-1368, U.S.A
Tel: <1> (408) 382-7500, Fax: <1> (408) 382-7501

Renesas Technology Europe Limited

Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K.
Tel: <44> (1628) 585-100, Fax: <44> (1628) 585-900

Renesas Technology (Shanghai) Co., Ltd.

Unit 204, 205, AZIACenter, No.1233 Lujiazui Ring Rd, Pudong District, Shanghai, China 200120
Tel: <86> (21) 5877-1818, Fax: <86> (21) 6887-7898

Renesas Technology Hong Kong Ltd.

7th Floor, North Tower, World Finance Centre, Harbour City, 1 Canton Road, Tsimshatsui, Kowloon, Hong Kong
Tel: <852> 2265-6688, Fax: <852> 2730-6071

Renesas Technology Taiwan Co., Ltd.

10th Floor, No.99, Fushing North Road, Taipei, Taiwan
Tel: <886> (2) 2715-2888, Fax: <886> (2) 2713-2999

Renesas Technology Singapore Pte. Ltd.

1 Harbour Front Avenue, #06-10, Keppel Bay Tower, Singapore 098632
Tel: <65> 6213-0200, Fax: <65> 6278-8001

Renesas Technology Korea Co., Ltd.

Kukje Center Bldg. 18th Fl., 191, 2-ka, Hangang-ro, Yongsan-ku, Seoul 140-702, Korea
Tel: <82> (2) 796-3115, Fax: <82> (2) 796-2145

Renesas Technology Malaysia Sdn. Bhd

Unit 906, Block B, Menara Amcorp, Amcorp Trade Centre, No.18, Jalan Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: <603> 7955-9390, Fax: <603> 7955-9510