DATA SHEET

For a complete data sheet, please also download:

- The IC04 LOCMOS HE4000B Logic Family Specifications HEF, HEC
- The IC04 LOCMOS HE4000B Logic Package Outlines/Information HEF, HEC

HEF4029B
MSI
Synchronous up/down counter, binary/decade counter

Product specification
File under Integrated Circuits, IC04

January 1995

Philips Semiconductors

PHILIPS

Synchronous up/down counter, binary/decade counter

HEF4029B MSI

DESCRIPTION

The HEF4029B is a synchronous edge-triggered up/down 4-bit binary/BCD decade counter with a clock input (CP), an active LOW count enable input ($\overline{CE}$), an up/down control input (UP/$\overline{DN}$), a binary/decade control input (BIN/$\overline{DEC}$), an overriding asynchronous active HIGH parallel load input (PL), four parallel data inputs (P_0 to P_3), four parallel buffered outputs (O_0 to O_3) and an active LOW terminal count output ($\overline{TC}$).

Information on P_0 to P_3 is asynchronously loaded into the counter while PL is HIGH, independent of CP.

The counter is advanced one count on the LOW to HIGH transition of CP when $\overline{CE}$ and PL are LOW. The $\overline{TC}$ signal is normally HIGH and goes LOW when the counter reaches its maximum count in the UP mode, or the minimum count in the DOWN mode provided $\overline{CE}$ is LOW.

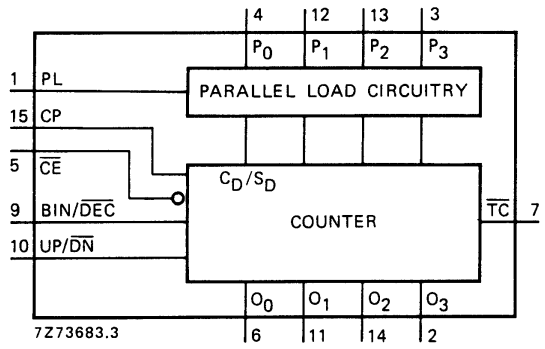


Fig.1 Functional diagram.

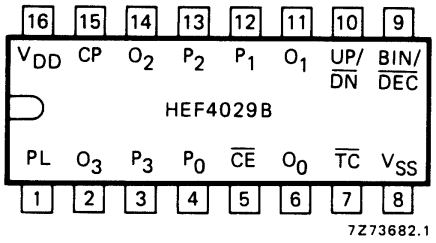


Fig.2 Pinning diagram.

HEF4029BP(N): 16-lead DIL; plastic (SOT38-1)

HEF4029BD(F): 16-lead DIL; ceramic (cerdip) (SOT74)

HEF4029BT(D): 16-lead SO; plastic (SOT109-1)

( ): Package Designator North America

PINNING

PL	parallel load input
P_0 to P_3	parallel data inputs
BIN/$\overline{DEC}$	binary/decade control input
UP/$\overline{DN}$	up/down control input
$\overline{CE}$	count enable input (active LOW)
CP	clock input (LOW to HIGH, edge triggered)
O_0 to O_3	buffered parallel outputs
$\overline{TC}$	terminal count output (active LOW)

FAMILY DATA, I_{DD} LIMITS category MSI

See Family Specifications

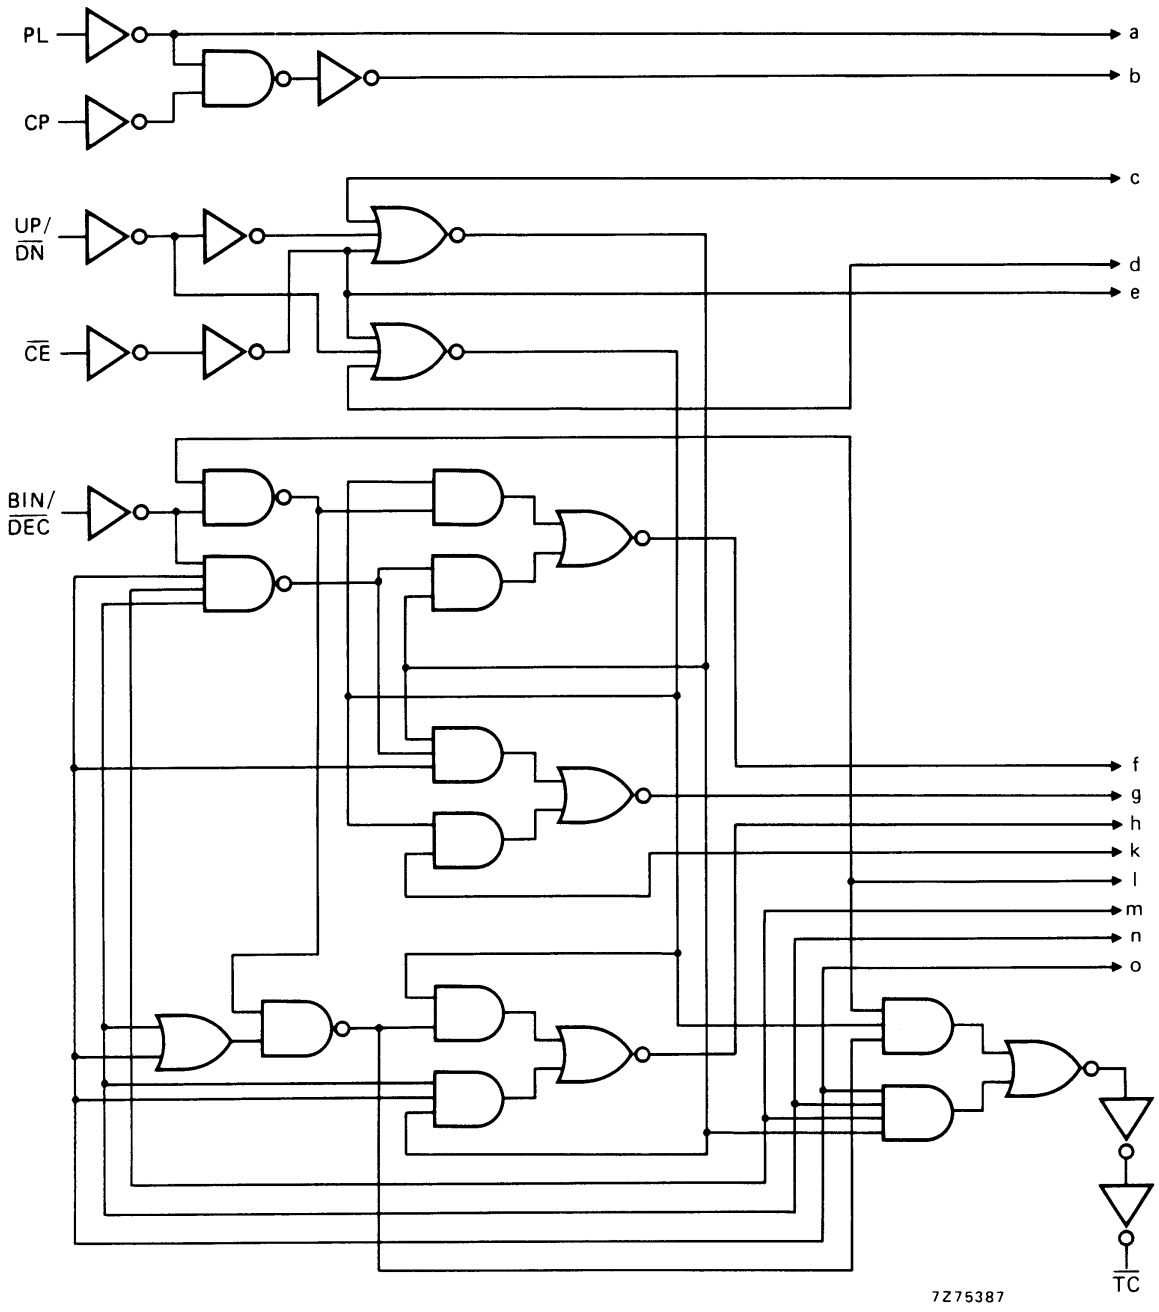


Fig.3 Logic diagram (continued in Fig.4).

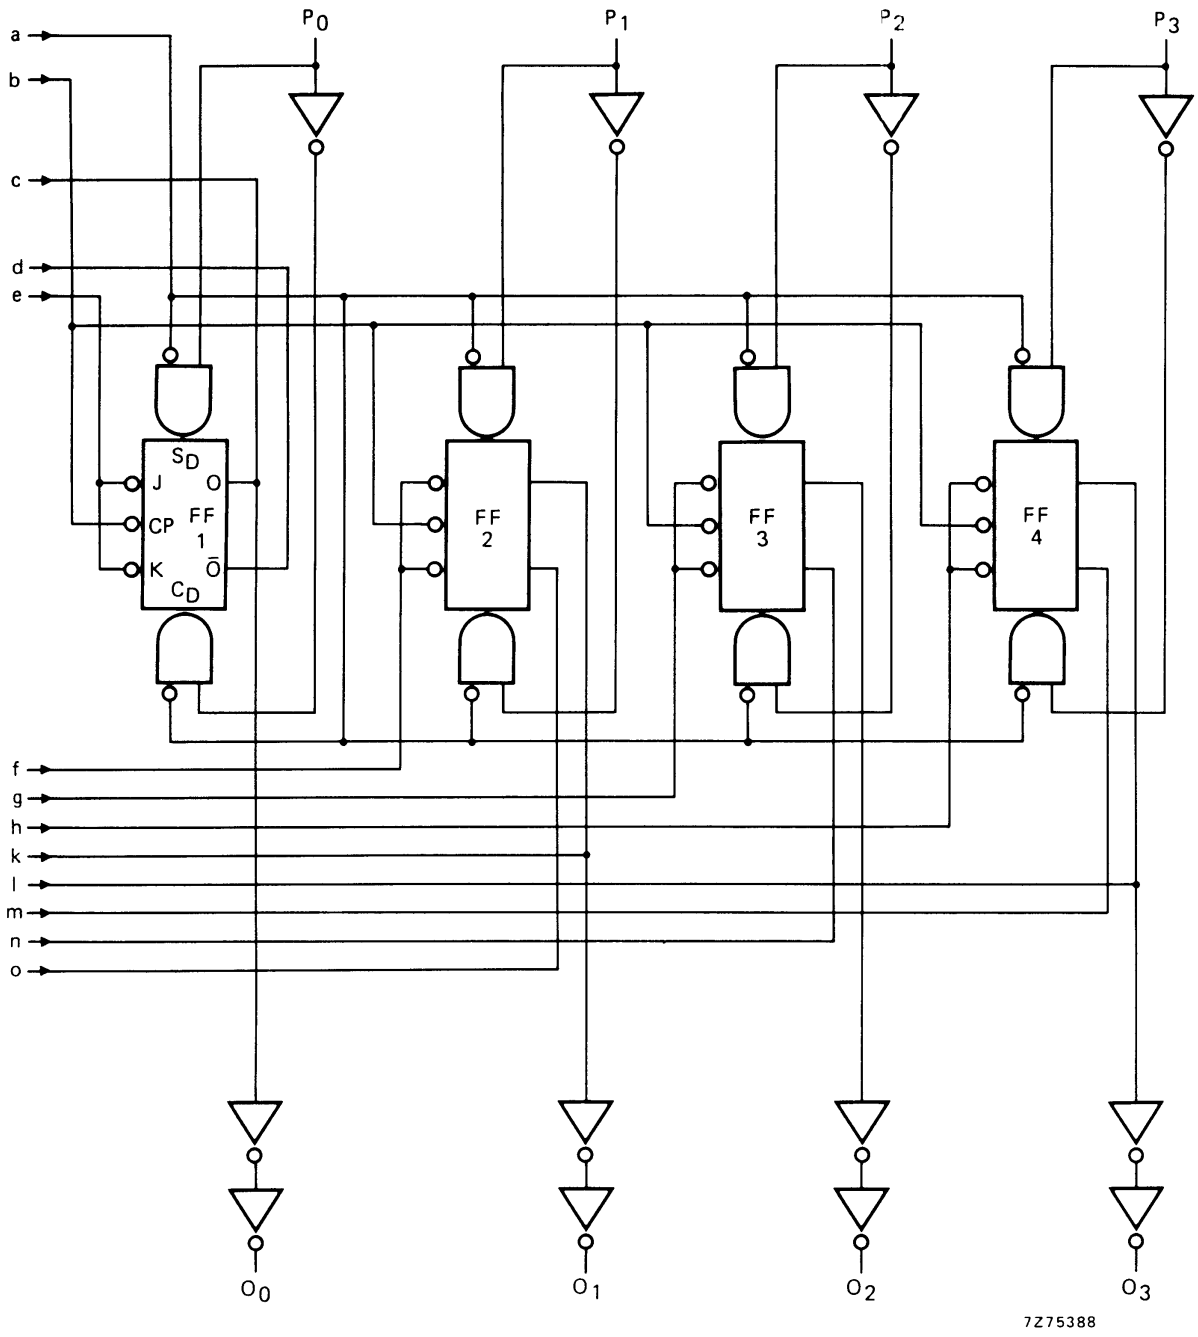


Fig.4 Logic diagram (continued from Fig.3).

FUNCTION TABLE

PL	BIN/$\overline{DEC}$	UP/$\overline{DN}$	$\overline{CE}$	CP	MODE
H	X	X	X	X	parallel load ($P_n \rightarrow O_n$)
L	X	X	H	X	no change
L	L	L	L	⎍	count-down, decade
L	L	H	L	⎍	count-up, decade
L	H	L	L	⎍	count-down, binary
L	H	H	L	⎍	count-up, binary

Notes

1. H = HIGH state (the more positive voltage)
   L = LOW state (the less positive voltage)
   X = state is immaterial
   ⎍ = positive-going clock pulse edge

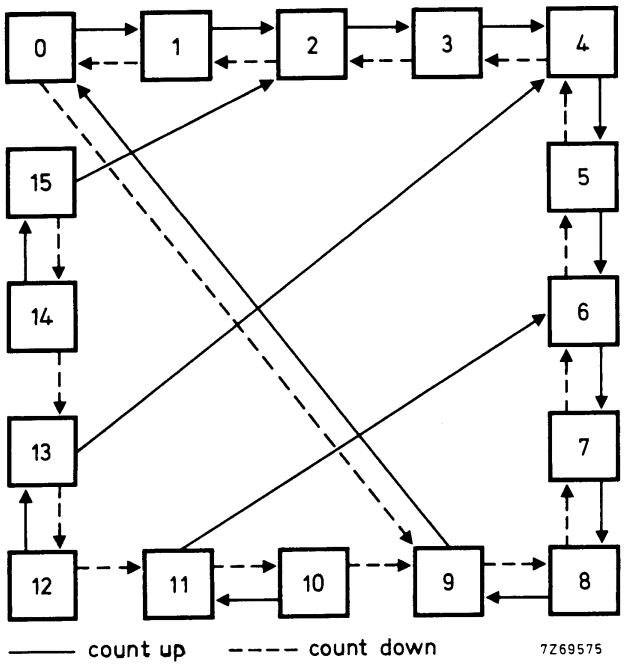


Fig.5 State diagram; BIN/$\overline{DEC}$ = LOW.

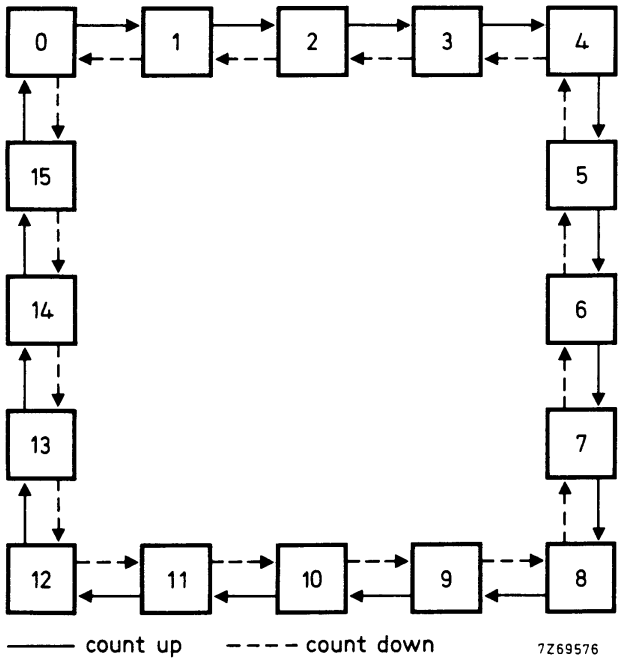


Fig.6 State diagram; BIN/$\overline{DEC}$ = HIGH.

Logic equation for terminal count:

$$TC = \overline{\overline{CE}\,(BIN/\overline{DEC} \bullet UP/\overline{DN} \bullet O_0 \bullet O_1 \bullet O_2 \bullet O_3 + BIN/\overline{DEC} \bullet \overline{UP/\overline{DN}} \bullet \overline{O}_0 \bullet \overline{O}_1 \bullet \overline{O}_2 \bullet \overline{O}_3 + \overline{BIN/\overline{DEC}} \bullet UP/\overline{DN} \bullet O_0 \bullet O_3 + \overline{BIN/\overline{DEC}} \bullet \overline{UP/\overline{DN}} \bullet \overline{O}_0 \bullet \overline{O}_1 \bullet \overline{O}_2 \bullet \overline{O}_3\,)}$$

AC CHARACTERISTICS

V_{SS} = 0 V; T_{amb} = 25 °C; input transition times ≤ 20 ns

	V_{DD} V	TYPICAL FORMULA FOR P (μW)	
Dynamic power dissipation per package (P)	5	$1000\ f_i + \sum(f_o C_L) \times V_{DD}^2$	where f_i = input freq. (MHz)
	10	$4500\ f_i + \sum(f_o C_L) \times V_{DD}^2$	f_o = output freq. (MHz)
	15	$11\ 500\ f_i + \sum(f_o C_L) \times V_{DD}^2$	C_L = load capacitance (pF)
			$\sum(f_o C_L)$ = sum of outputs
			V_{DD} = supply voltage (V)

AC CHARACTERISTICS

V_{SS} = 0 V; T_{amb} = 25 °C; C_L = 50 pF; input transition times ≤ 20 ns

	V_{DD} V	SYMBOL	MIN.	TYP.	MAX.		TYPICAL EXTRAPOLATION FORMULA
Propagation delays							
CP → O_n	5			145	290	ns	118 ns + (0,55 ns/pF) C_L
HIGH to LOW	10	t_{PHL}		55	110	ns	44 ns + (0,23 ns/pF) C_L
	15			40	75	ns	32 ns + (0,16 ns/pF) C_L
	5			160	315	ns	133 ns + (0,55 ns/pF) C_L
LOW to HIGH	10	t_{PLH}		60	120	ns	49 ns + (0,23 ns/pF) C_L
	15			40	80	ns	32 ns + (0,16 ns/pF) C_L
CP → $\overline{TC}$	5			280	560	ns	253 ns + (0,55 ns/pF) C_L
HIGH to LOW	10	t_{PHL}		105	205	ns	94 ns + (0,23 ns/pF) C_L
	15			70	140	ns	62 ns + (0,16 ns/pF) C_L
	5			195	385	ns	168 ns + (0,55 ns/pF) C_L
LOW to HIGH	10	t_{PLH}		75	150	ns	64 ns + (0,23 ns/pF) C_L
	15			55	105	ns	47 ns + (0,16 ns/pF) C_L
PL → O_n	5			120	240	ns	93 ns + (0,55 ns/pF) C_L
HIGH to LOW	10	t_{PHL}		50	100	ns	39 ns + (0,23 ns/pF) C_L
	15			35	70	ns	27 ns + (0,16 ns/pF) C_L
	5			170	335	ns	143 ns + (0,55 ns/pF) C_L
LOW to HIGH	10	t_{PLH}		65	130	ns	54 ns + (0,23 ns/pF) C_L
	15			45	90	ns	37 ns + (0,16 ns/pF) C_L
$\overline{CE}$ → $\overline{TC}$	5			180	360	ns	153 ns + (0,55 ns/pF) C_L
HIGH to LOW	10	t_{PHL}		70	140	ns	59 ns + (0,23 ns/pF) C_L
	15			50	100	ns	42 ns + (0,16 ns/pF) C_L
	5			170	335	ns	143 ns + (0,55 ns/pF) C_L
LOW to HIGH	10	t_{PLH}		65	135	ns	54 ns + (0,23 ns/pF) C_L
	15			50	100	ns	42 ns + (0,16 ns/pF) C_L

	V_{DD} V	SYMBOL	MIN.	TYP.	MAX.		TYPICAL EXTRAPOLATION FORMULA
Output transition times	5			60	120	ns	10 ns + (1,0 ns/pF) C_L
HIGH to LOW	10	t_{THL}		30	60	ns	9 ns + (0,42 ns/pF) C_L
	15			20	40	ns	6 ns + (0,28 ns/pF) C_L
	5			60	120	ns	10 ns + (1,0 ns/pF) C_L
LOW to HIGH	10	t_{TLH}		30	60	ns	9 ns + (0,42 ns/pF) C_L
	15			20	40	ns	6 ns + (0,28 ns/pF) C_L

AC CHARACTERISTICS

V_{SS} = 0 V; T_{amb} = 25 °C; C_L = 50 pF; input transition times ≤ 20 ns

	V_{DD} V	SYMBOL	MIN	TYP	MAX	
Minimum clock pulse width; LOW	5	t_{WCPL}	110	55	ns	see also waveforms Figs 7 and 8
	10		35	20	ns	
	15		25	15	ns	
Minimum PL pulse width; HIGH	5	t_{WPLH}	160	80	ns	
	10		55	25	ns	
	15		35	15	ns	
Recovery time for PL	5	t_{RPL}	150	75	ns	
	10		50	25	ns	
	15		35	20	ns	
Set-up times BIN/$\overline{DEC}$ → CP	5	t_{su}	270	135	ns	
	10		90	45	ns	
	15		60	30	ns	
UP/$\overline{DN}$ → CP	5	t_{su}	300	150	ns	
	10		105	55	ns	
	15		75	35	ns	
$\overline{CE}$ → CP	5	t_{su}	240	120	ns	
	10		90	50	ns	
	15		70	40	ns	
P_n → PL	5	t_{su}	70	35	ns	
	10		20	10	ns	
	15		10	5	ns	
Hold times BIN/$\overline{DEC}$ → CP	5	t_{hold}	45	−90	ns	
	10		15	−30	ns	
	15		10	−20	ns	
UP/$\overline{DN}$ → CP	5	t_{hold}	15	−135	ns	
	10		0	−50	ns	
	15		−5	−35	ns	
$\overline{CE}$ → CP	5	t_{hold}	30	−30	ns	
	10		10	−10	ns	
	15		5	−10	ns	
P_n → PL	5	t_{hold}	15	−20	ns	
	10		0	−10	ns	
	15		0	−5	ns	
Maximum clock pulse frequency	5	f_{max}	2	4	MHz	
	10		5	10	MHz	
	15		8	15	MHz	

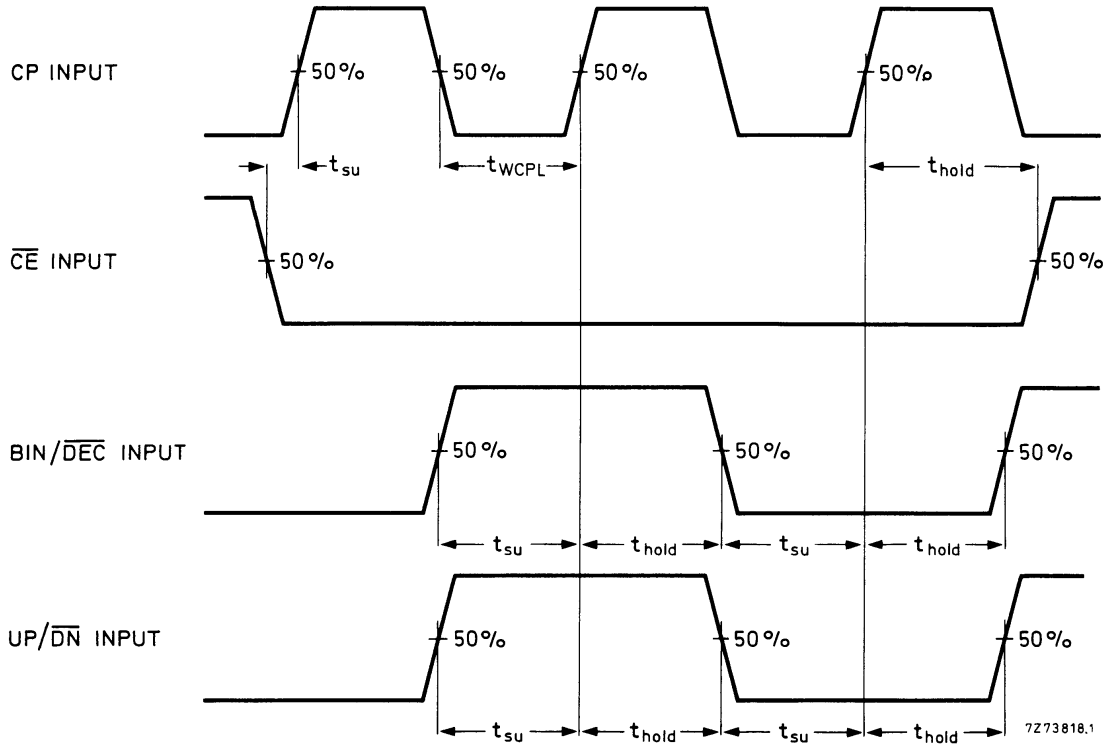


Fig.7 Waveforms showing minimum pulse width for CP, set-up and hold times for $\overline{CE}$ to CP, BIN/$\overline{DEC}$ to CP and UP/$\overline{DN}$ to CP. Set-up and hold times are shown as positive values but may be specified as negative values.

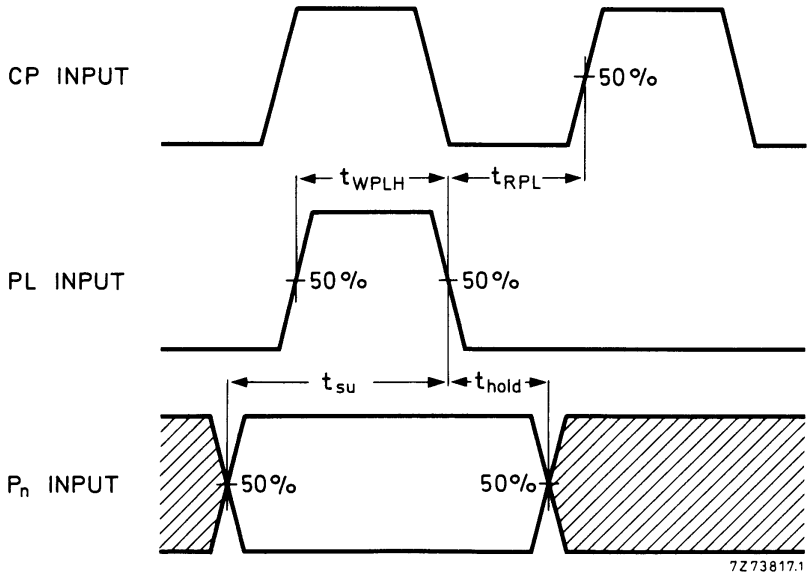


Fig.8 Waveforms showing minimum pulse width for PL, recovery time for PL, and set-up and hold times for P_n to PL. Set-up and hold times are shown as positive values but may be specified as negative values.

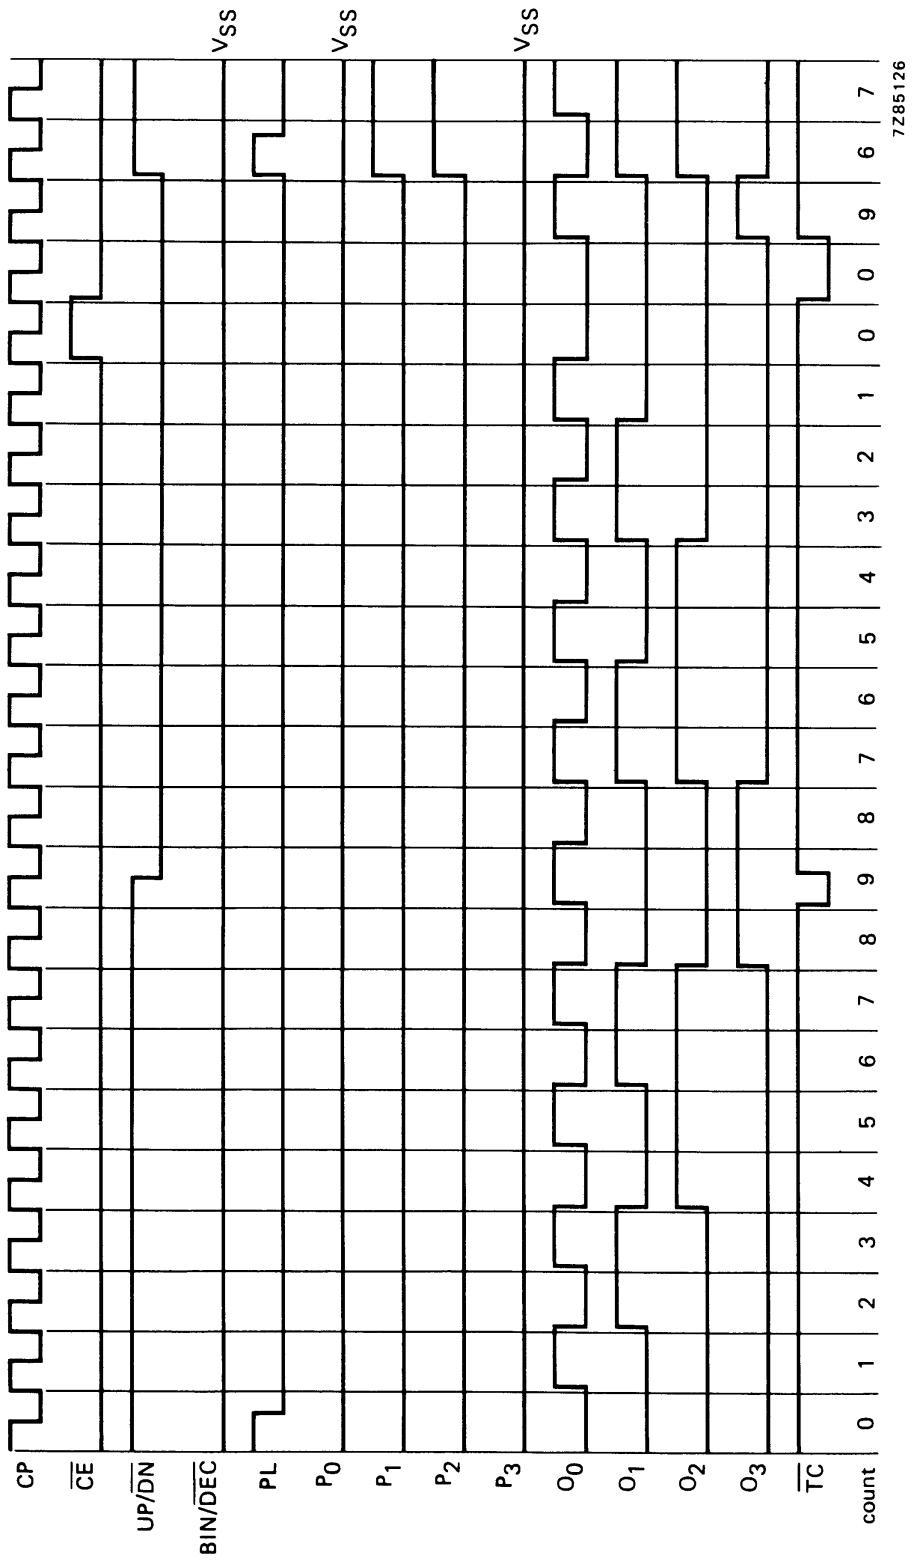


Fig.9 Timing diagram; decade mode; P_0 = LOW; P_3 = LOW; BIN/$\overline{DEC}$ = LOW.

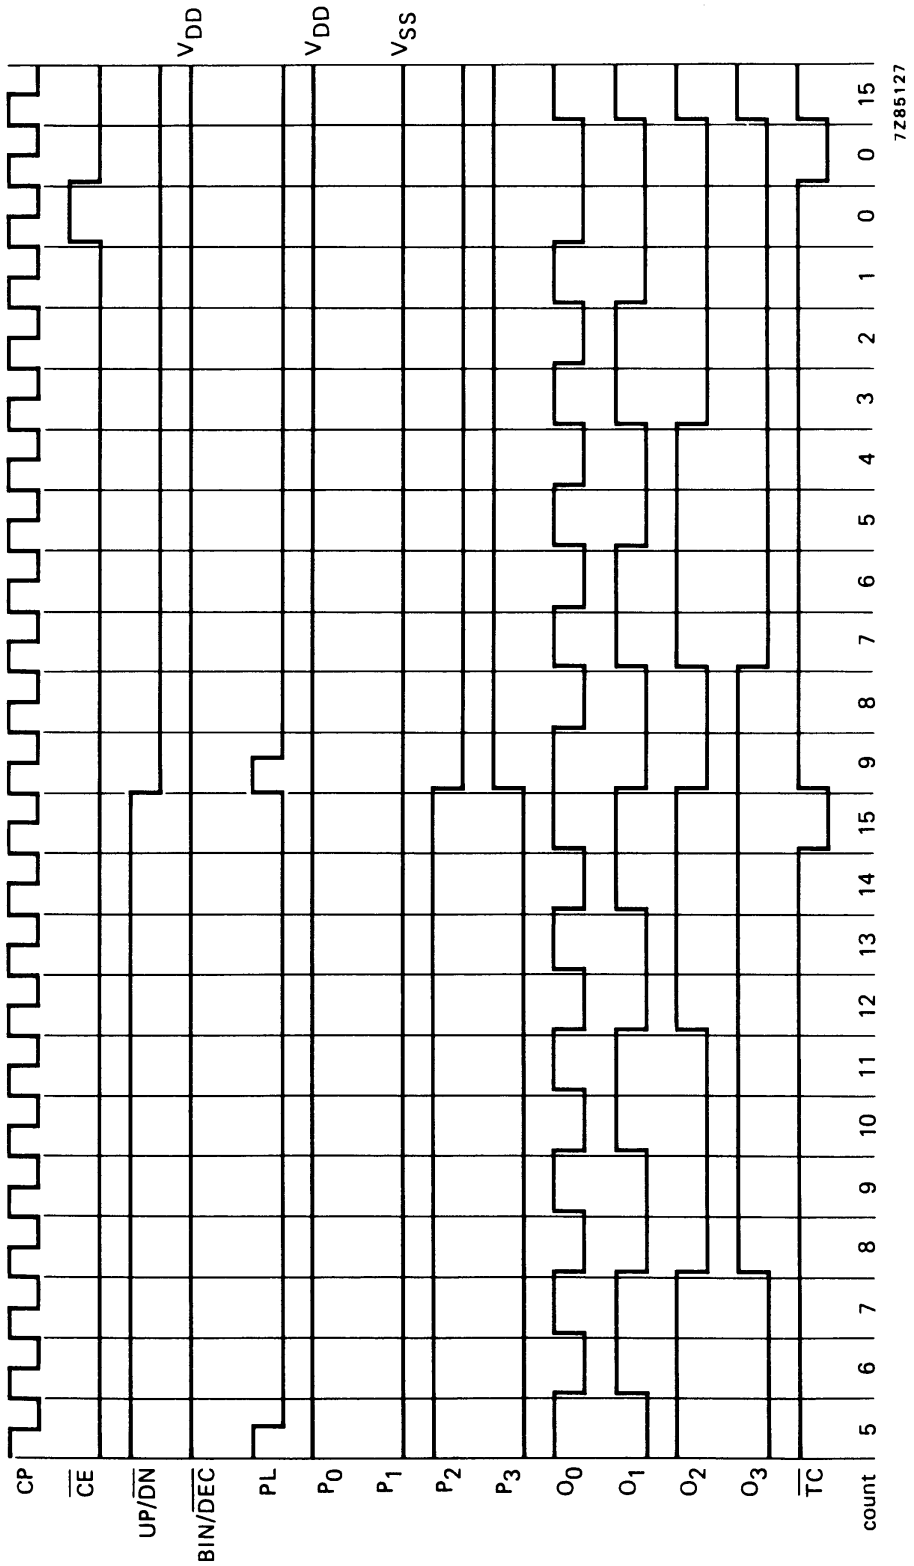


Fig.10 Timing diagram; binary mode; P_0 = HIGH; P_1 = LOW; BIN/$\overline{DEC}$ = HIGH.

APPLICATION INFORMATION

Some examples of applications for the HEF4029B are:

- Programmable binary and decade counting/frequency synthesizers - BCD output.
- Analogue-to-digital and digital-to-analogue conversion.
- Up/down binary counting.
- Magnitude and sign generation.
- Up/down decade counting.
- Difference counting.


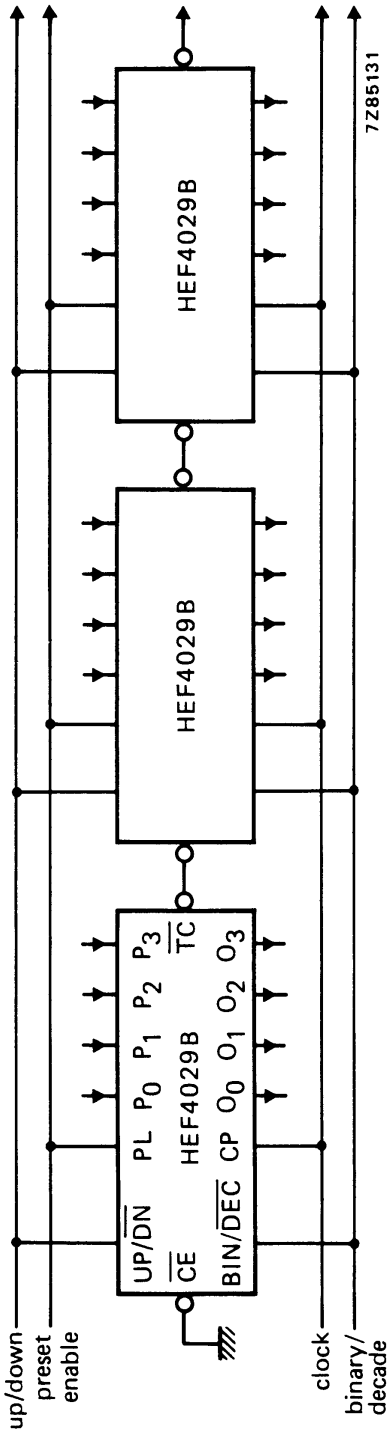


Fig.11 Example of parallel clocking when cascading HEF4029B ICs.

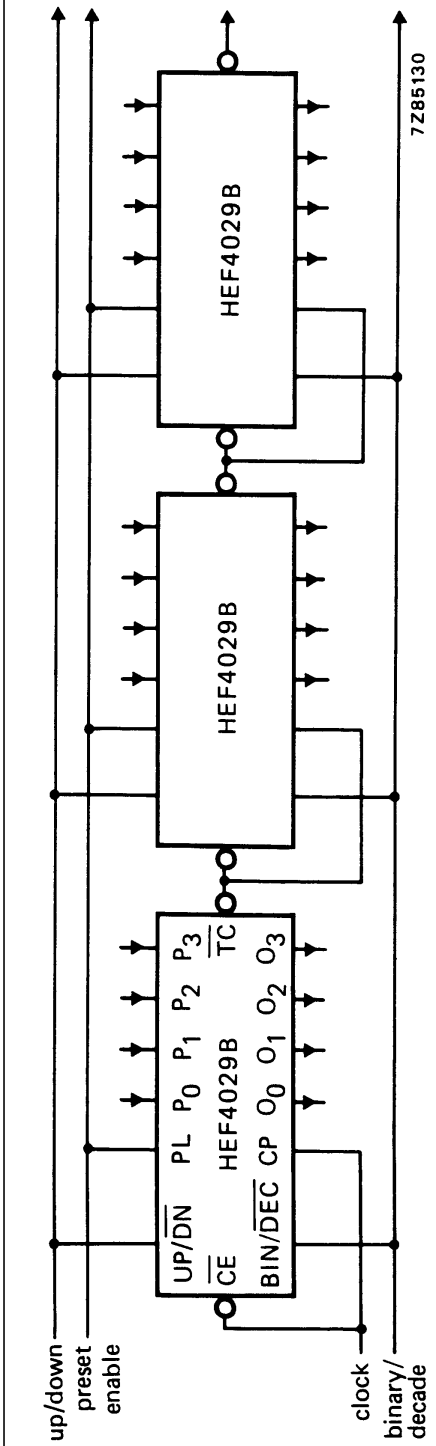

Note

$\overline{TC}$ lines at all stages after the first may have a negative-going glitch pulse resulting from differential delays of different HEF4029B ICs. These negative-going glitches do not affect proper HEF4029B operation; however if the $\overline{TC}$ signals are used to trigger other edge-sensitive logic devices, such as flip-flops or counters, the $\overline{TC}$ signals should be gated with the clock signal using a 2-input OR gate such as HEF4071B.

Fig.12 Example of ripple clocking when cascading HEF4029B ICs. Ripple clocking mode: the up/down control can be changed at any count; the only restriction on changing the up/down control is that the clock input to the first counting stage must be HIGH.