
MONOLITHIC IC 82XX SERIES



SOT-25

■ DESCRIPTION

The normal operation of the UTC **82XX** is that while the power is turned on or interrupted, detect power supply voltage and then reset the system accurately.

The internal circuits of the UTC **82XX** include a built-in fixed delay time generating circuit. With a counter timer using an analog/digital hybrid circuit, the UTC **82XX** as new low reset type system reset ICs expands the delay time series.

These ICs can be used in a variety of CPU systems and other logic systems.

■ FEATURES

* Internal Fixed Delay Time Setting by Counter Timer
* Grate Delay Time Temperature Characteristics:±800ppm/°C
* Operating Limit Voltage as 0.65V(Typ.)
* Hysteresis Voltage Provided: 50mV(Typ.)
* Circuit Current While On I_{CCL}=300μA(Typ.)
* Circuit Current While Off I_{CCH}=200μA(Typ.)
* Halogen Free

■ ORDERING INFORMATION

Ordering Number	Package	Packing
82XXG-x-AF5-R	SOT-25	Tape Reel


Notes: xx: Output Voltage, refer to Marking Information.
x : Delay Time, refer to Electrical Characteristics of "H" Transport Delay Time

82XX G-x-AF5-R
(1) Packing Type
(2) Package Type
(3) Delay Time
(4) Halogen Free
(5) Output Voltage Code


(1) R: Tape Reel
(2) AF5: SOT-25
(3) x: Refer to Electrical Charactreistics of "H" Transport Delay Time
(4) G: Halogen Free
(5) xx: Refer to Marking Information

Copyright © 2010 Unisonic Technologies Co., Ltd

■ MARKING INFORMATION

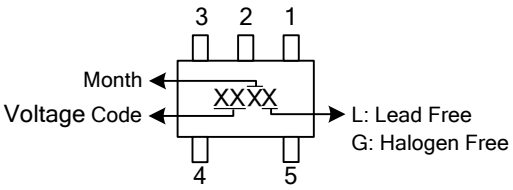PACKAGE	VOLTAGE CODE	MARKING
SOT-25	25:2.5V 27:2.7V 2K:2.93V	


■ PIN CONFIGURATION



■ PIN DESCRIPTION

PIN NO.	PIN NAME	DESCRIPTION
1	V_{OUT}	Output pin
2	NC	Connected nothing
3	RESET	Reset control pin
4	V_{CC}	Supply voltage
5	GND	Ground

■ BLOCK DIAGRAM

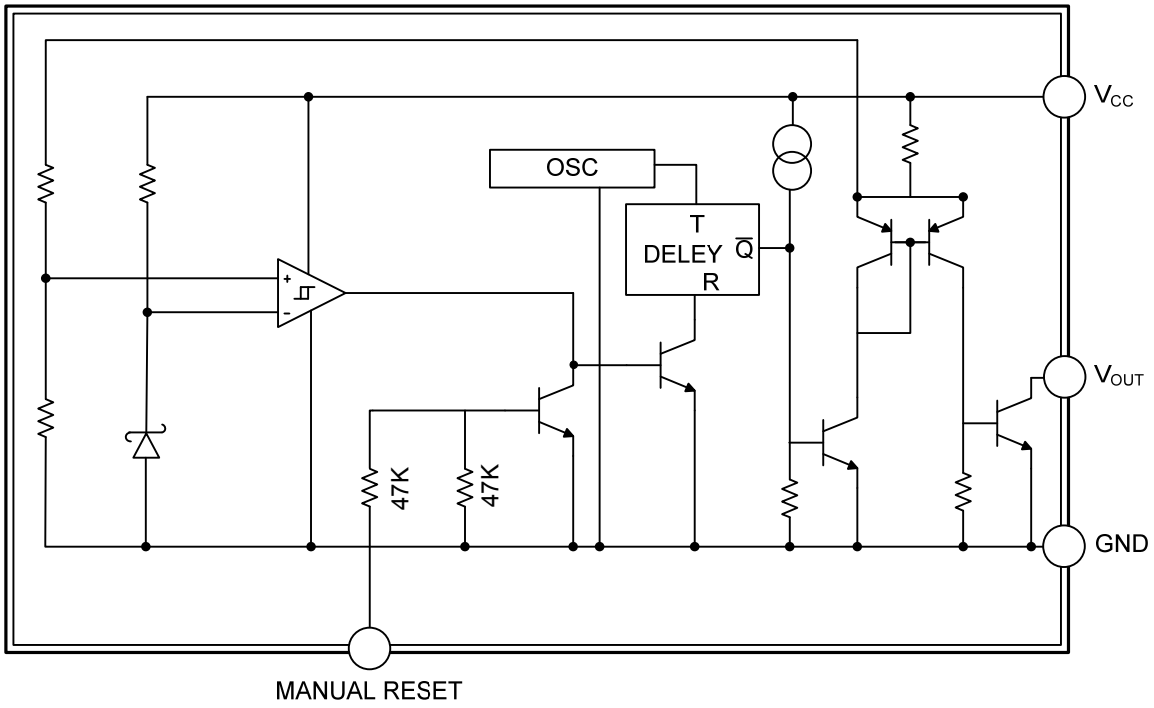

■ ABSOLUTE MAXIMUM RATING (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Power Supply Voltage	V_{CC}	-0.3~+10	V
Manual Reset Input Voltage	V_{RESET}	-0.3~+10	V
Power Dissipation	P_D	400	mW
Operating Temperature	T_{OPR}	-20~+75	°C
Storage Temperature	T_{STG}	-40~+125	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.


■ ELECTRICAL CHARACTERISTICS (Ta=25°C, Unless otherwise specified)

V_S=2.5V~2.93V

PARAMETER		SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Detection Voltage		V_S	V_{OL}≤0.4V, V_{CC}=H→L, R_L=470Ω (See Test Circuit 1)		V_S -0.15V	V_S	V_S +0.15V	V
Low-Level Output Voltage		V_{OL}	V_{CC}=$V_{S(min)}$-0.05V, R_L=470Ω (See Test Circuit 1)			0.1	0.4	V
Operating Power Supply Voltage		V_{OPL}	R_L=4.7kΩ, V_{OL}≤0.4V			0.65	0.85	V
Hysteresis Voltage		ΔV_S	V_{CC}=L→H→L , R_L=470Ω (See Test Circuit 1)		30	50	100	mV
Detection Voltage Temperature Coefficient		$\frac{V_S}{\Delta T}$	R_L=470Ω, Ta=-20°C~+75°C (See Test Circuit 1)			±0.01		%/°C
Output Leakage Current		I_{OH}	V_{CC}=10V (See Test Circuit 1)				±0.1	μA
Circuit Current	On	I_{CCL}	V_{CC}= $V_{S(min)}$-0.05V, R_L=∞ (See Test Circuit 1)			300	600	μA
	Off	I_{CCH}	V_{CC}=$V_{S(Typ)}$/0.85V, R_L=∞ (See Test Circuit 1)			200	350	μA
"H" Transport Delay Time		t_{PLH}	R_L=4.7KΩ, C_L=100PF (Note 1) (See Test Circuit 2)	P	30	50	75	mS
				Q	60	100	150	mS
				R	120	200	300	mS
				S	240	400	600	mS
				T	480	800	1200	mS
"L" Transport Delay Time		t_{PHL}	R_L=4.7kΩ, C_L=100PF (Note 1) (See Test Circuit 2)			10		μS
Output Current While on 1		I_{OL1}	V_{CC}=VS min.-0.05V, R_L=0Ω (See Test Circuit 1)		8			mA
Output Current While on 2		I_{OL2}	Ta=-20°C ~+75°C, R_L=0Ω(Note 2) (See Test Circuit 1)		6			mA
Manual Reset Pin	Input High Voltage	V_{RESH}			2.0			V
	Input High Current	I_{RESH}	V_{RESET}=2V				80	μA
	Input Low Voltage	V_{RESL}					0.8	V


Notes: 1. t_{PLH}: V_{CC}= ($V_{S(TYP)}$-0.4V)→($V_{S(TYP)}$+0.4V)
t_{PHL}: V_{CC}= ($V_{S(TYP)}$+0.4V)→($V_{S(TYP)}$-0.4V)
2. V_{CC}=$V_{S(MIN)}$-0.15V
3. V_{OUT} pin is low when manual reset pin is high.
V_{OUT} pin is high when manual reset pin is low.

■ TEST CIRCUITS

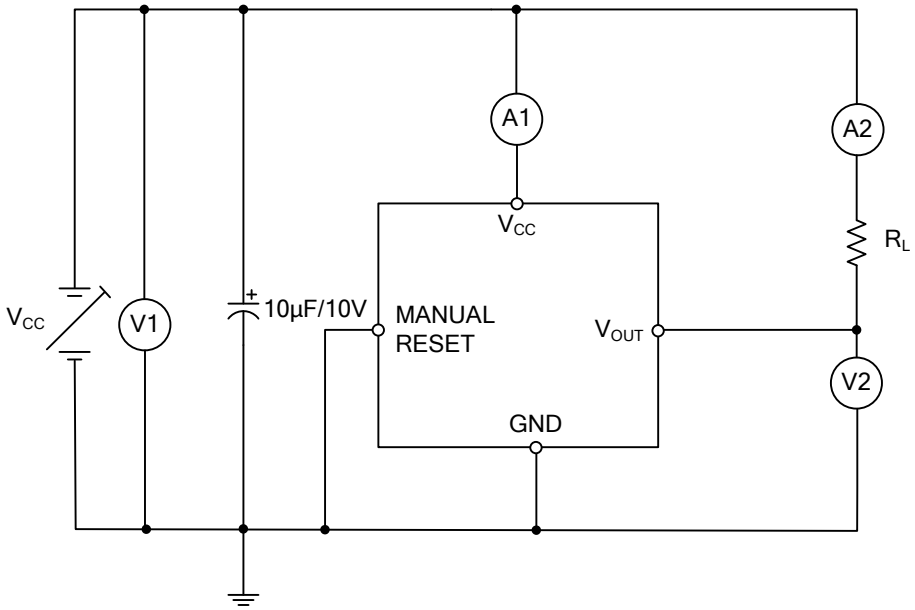

Test Circuit 1


A: DC ammeter
V: DC voltmeter
CRT: Oscilloscope

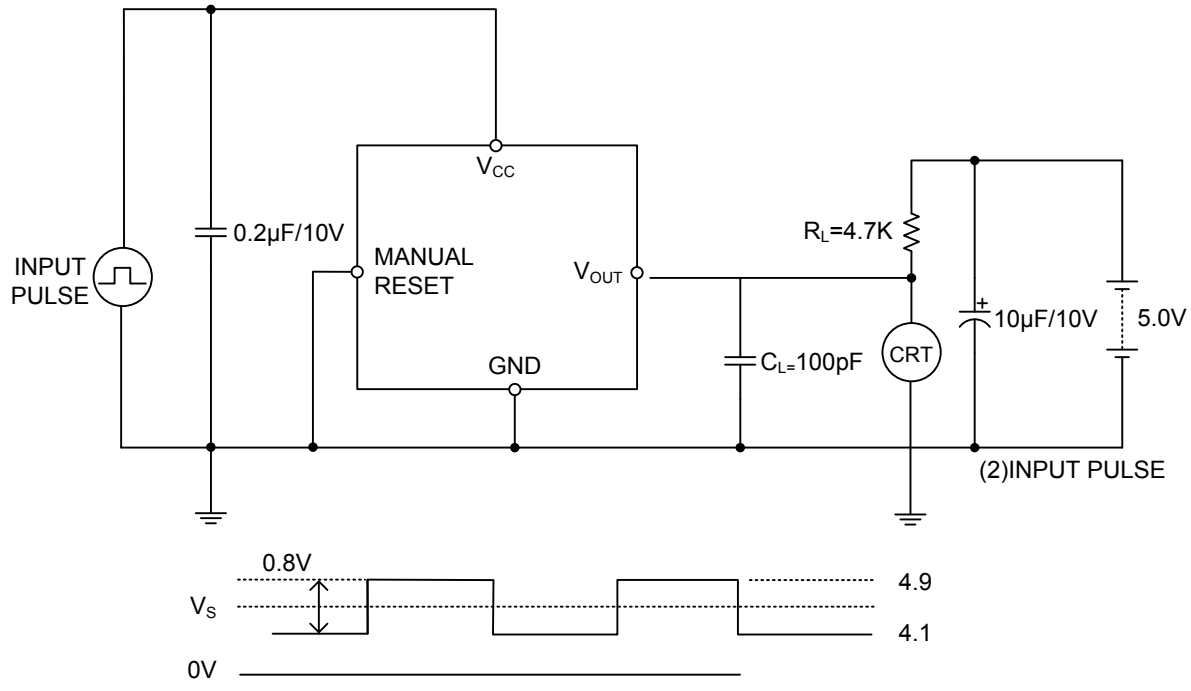

Note Input model is an example for 82XX


Test Circuit 2

■ TIMING CHART

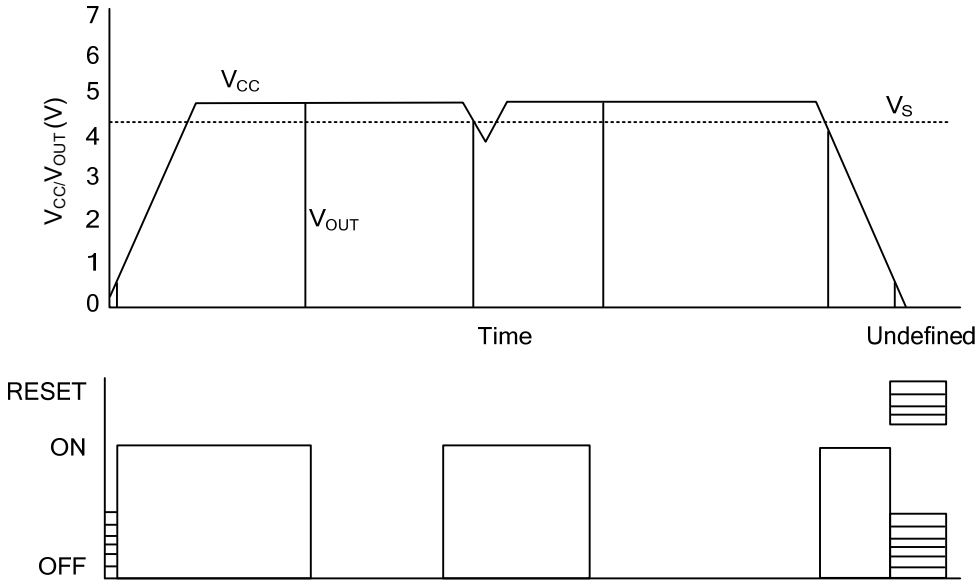


■ TYPICAL APPLICATION CIRCUITS

1. Normal hard reset

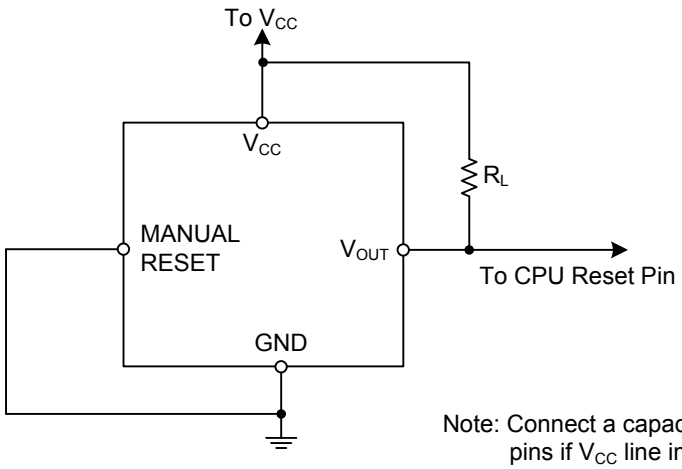

Note: Connect a capacitor between IC V_{CC} and GND pins if V_{CC} line impedance is high.


2. Manual reset

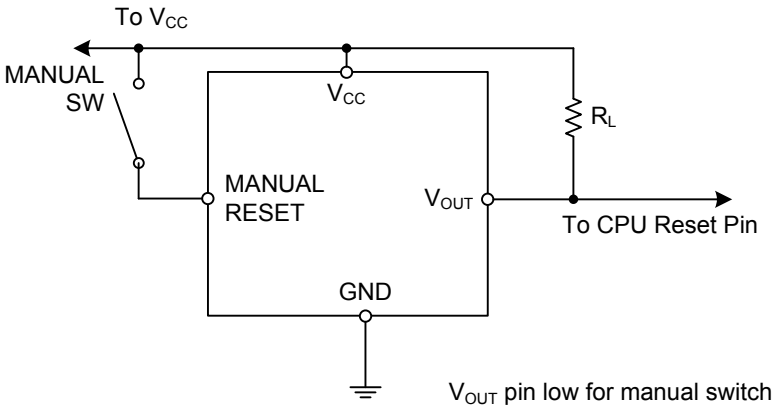

V_{OUT} pin low for manual switch ON.
V_{OUT} pin high for manual switch OFF.

Note: Connect a capacitor between IC V_{CC} and GND pins if V_{CC} line impedance is high.

3. Mute circuit

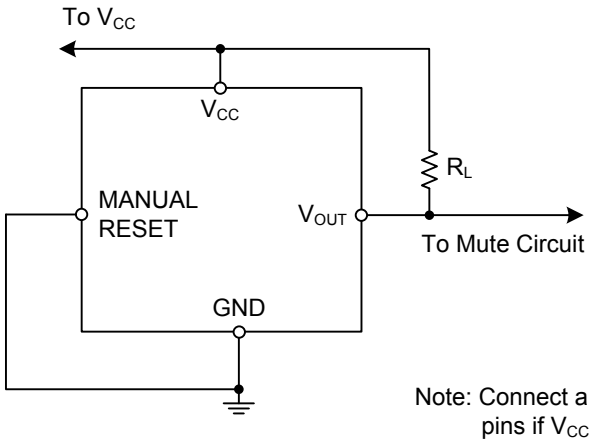

Note: Connect a capacitor between IC V_{CC} and GND pins if V_{CC} line impedance is high.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.