


Fig. 1

- Series 830 & 832 use MM #3790 & MM #3796 pins. See page 176 for details.
- Series 831 & 833 use MM #1805 and MM #3805 receptacles and accept pin diameters from .015"-.025". See page 140 for details.
- Receptacles use Hi-Rel, 6 finger BeCu #43 contact rated at 3 amps. See page 220 for details.
- Insulators are high temp. thermoplastic.

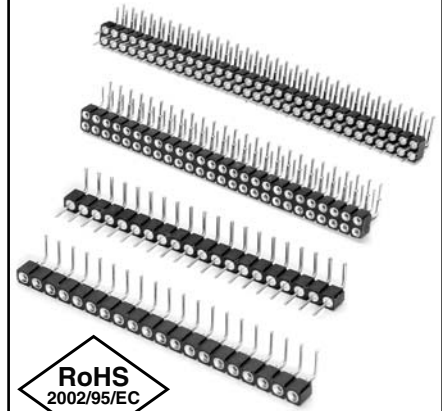

## Ordering Information

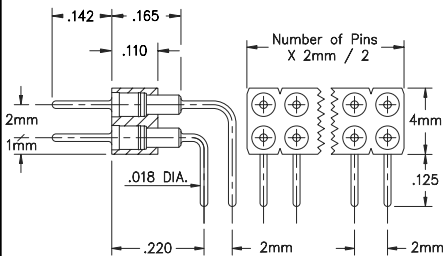


Fig. 2

Fig. 1

### 830...001 Single Row Right Angle Header

830-10-0\_\_-20-001000

Specify # of pins → 01-50

Fig. 2

### 832...001 Double Row Right Angle Header

832-10-\_\_-20-001000

Specify # of pins → 002-100

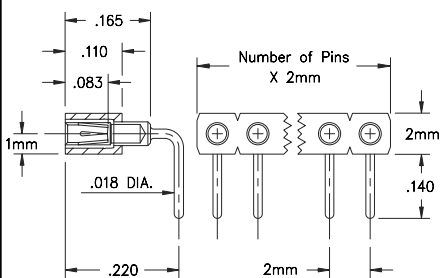


Fig. 3

Fig. 3

### 831...001 Single Row Right Angle Socket

831-43-0\_\_-20-001000

Specify # of pins → 01-50

Fig. 4

### 833...001 Double Row Right Angle Socket

833-43-\_\_-20-001000

Specify # of pins → 002-100

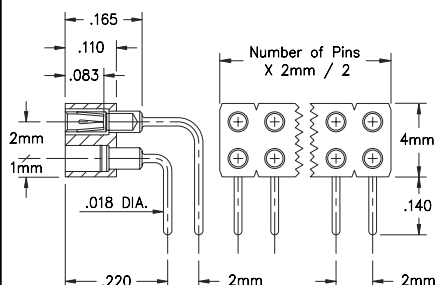


Fig. 4


For Electrical,  
Mechanical & Environmental  
Data, See pg. 4

For RoHS compliance  
select ◇ plating code.

PLATING CODE =

10 ◇

Pin Plating



10μ" Au

PLATING CODE =

43 ◇

Sleeve (Pin)



200μ" Sn

Contact (Clip)



30μ" Au