

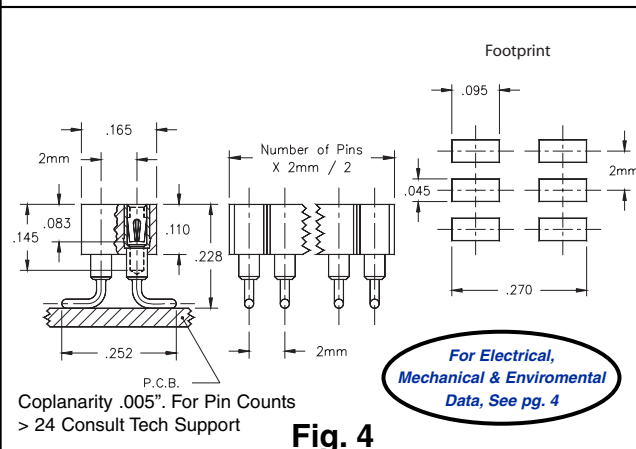
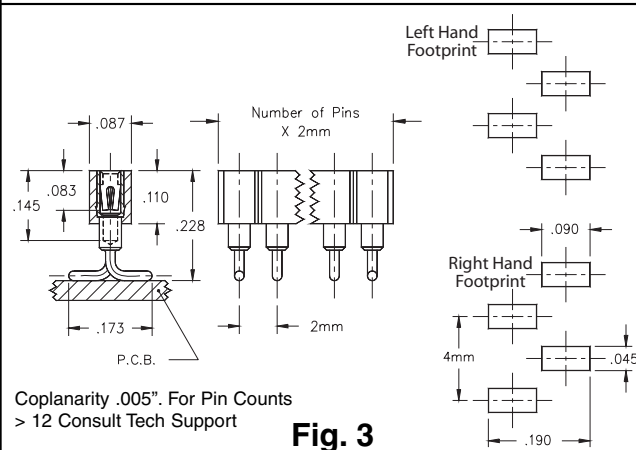
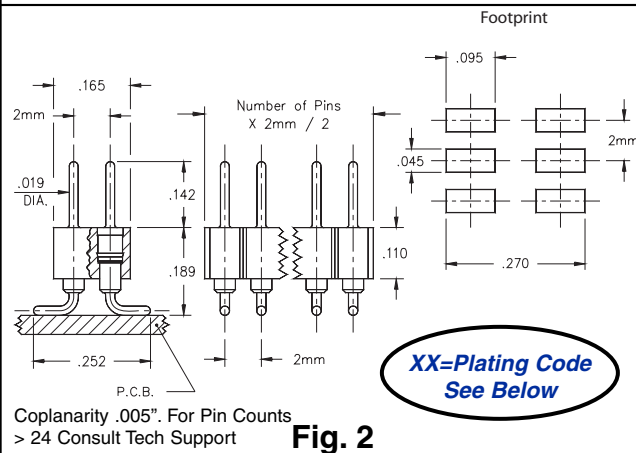


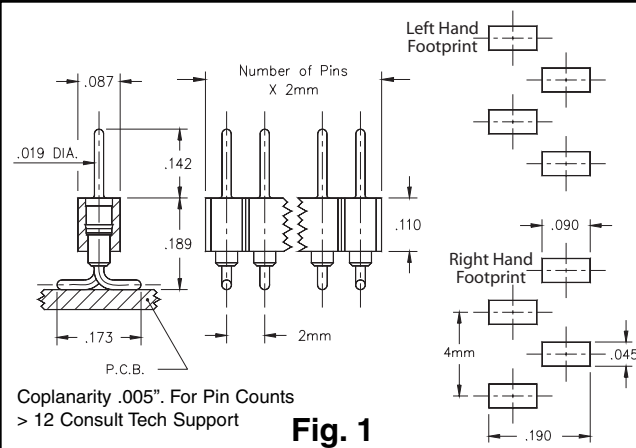

- Headers (830 & 832) use MM# 6218 pins. See page 175 for details.
- Sockets (831 & 833) use MM# 1802 receptacles and accept pin diameters from .015-.025. See page 140 for details.
- Coplanarity .005" (Single Row max 12 pins; Double Row max 24 pins) for higher pin counts contact technical support.
- Insulators are high temp. thermoplastic.

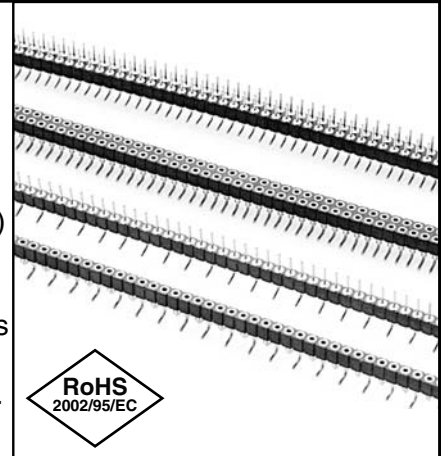

For RoHS compliance
select plating code.

Ordering Information

Fig. 1L	Single Row Header, Left Hand Footprint Odd or Even # of pins		
	830-XX-0_-30-001000 Specify # of pins → 01-50		
Fig. 1R	Single Row Header, Right Hand Footprint Even # of pins		
	830-XX-0_-30-002000 Specify even # of pins → 02-50		
Fig. 2	Double Row Header, Even # of pins		
	832-XX-_-30-001000 Specify even # of pins → 004-100		
SPECIFY PLATING CODE XX=		10	90 40
Pin Plating		10μ" Au	200μ" Sn/Pb 200μ" Sn
Fig. 3L	Single Row Socket, Left Hand Footprint Odd or Even # of pins		
	831-XX-0_-30-001000 Specify # of pins → 01-50		
Fig. 3R	Single Row Socket, Right Hand Footprint Even # of pins		
	831-XX-0_-30-002000 Specify even # of pins → 02-50		
Fig. 4	Double Row Socket, Even # of pins		
	833-XX-_-30-001000 Specify even # of pins → 004-100		
SPECIFY PLATING CODE XX=		93	43
Sleeve (Pin)		200μ" Sn/Pb	200μ" Sn
Contact (Clip)		30μ" Au	30μ" Au