




-  Rated voltage: 250V, DC to 400Hz
-  2000VAC isolation between windings
-  750VAC isolation between windings and core
-  Temperature rise: 50°C maximum
-  Operating temperature -55°C to +125°C
-  Core can be assembled horizontally by special request
-  RoHS compliant

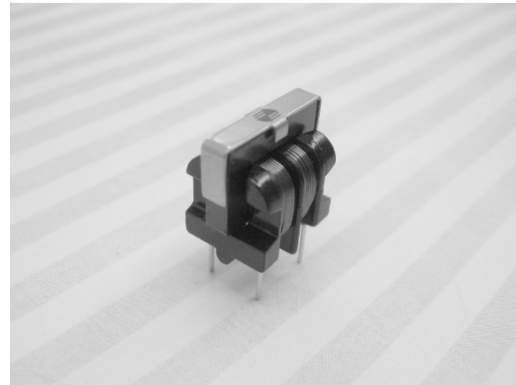

ELECTRICAL SPECIFICATION @ 25°C


Part Number	Inductance ¹ Minimum (mH)	Rated Current I _{rms} (A Max)	DCR (Ω Max)	Marking (xxx)
832-00083F	0.39	1.60	0.08	083
832-00084F	0.68	1.20	0.13	084
832-00085F	0.90	1.00	0.19	085
832-00086F	1.40	0.80	0.30	086
832-00087F	2.10	0.65	0.48	087
832-00088F	3.30	0.50	0.74	088
832-00089F	4.90	0.40	1.20	089
832-00090F	7.40	0.35	1.80	090
832-00091F	11.50	0.27	2.80	091
832-00092F	18.70	0.22	4.45	092

Notes:

1. Inductance is measured at 1kHz.
2. The part temperature (ambient temperature + temperature rise) should not exceed the upper limit of the operating temperature under worst case operating conditions. Circuit design, component placement, PWB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.




MECHANICAL DIMENSIONS

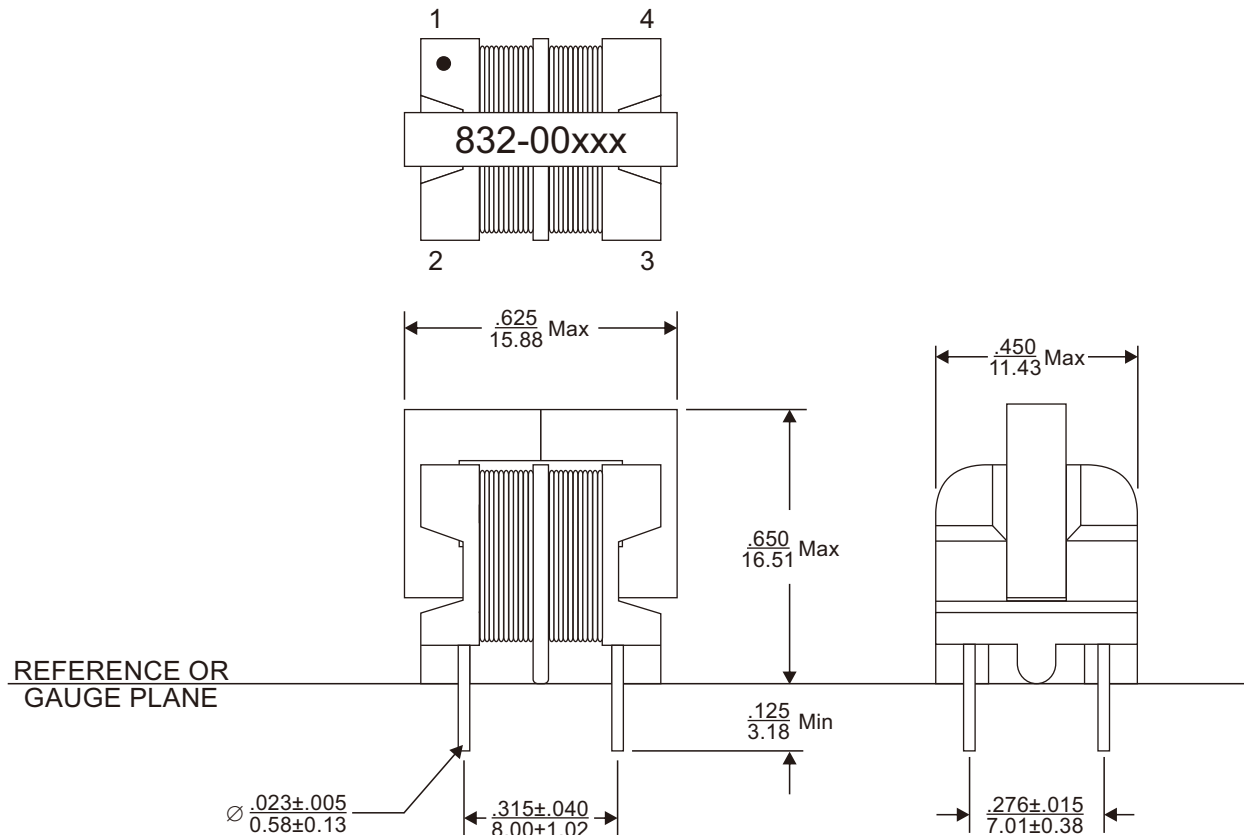

Notes:

3. All dimensions are specified in $\frac{\text{inches}}{\text{mm}}$ with higher precedence in mm.
4. Unless otherwise specified, all tolerances are $\pm \frac{.010}{0.25}$.

SCHEMATICS



FOR MORE INFORMATION, PLEASE CONTACT

HEADQUARTER

FLAT G, 5/F, Valiant Industrial Centre,
2-12 Au Pui Wan Street, Fotan, N.T.
Hong Kong
Tel: (8620) 8221 4480 Fax: (852) 2954 3304
Email: eempl@eleceltek.com
Website: <http://www.eleceltek.com> / www.eemagnetic.com

Information herein is for reference only and subject to change without notice. It does not constitute any representation, warranty or commitment of the company in respect of the products in any aspect. All logos, brands and product names mentioned herein are trademarks or registered trademarks of their respective owners. The company does not assume any liability arising out of the application or use of any product or circuit described herein. Copyrights 2009, E & E Magnetic Products Limited.