


Features

- Glass passivated Bridge Rectifiers
- Ideal for automated placement
- Very low profile - typical height of 1.9 mm
- High surge current capability
- Moisture sensitivity: level 1, per J-STD-020
- High temperature soldering guaranteed: 260°C/10 seconds
- Polarity:As marked on body



RoHS
COMPLIANT



DFL

Mechanical Data

- Case:DFL,Molding compound meets UL 94V-0 flammability rating
- Weight:0.3435g

Typical Applications

General purpose use in ac-to dc bridge full wave rectification for SMPS,lighting,adapter,charger,home appliances,office equipment,and telecommunication applications

Maximum Ratings (TA = 25 °C unless otherwise noted)

Parameter	Symbol	DFL2005	DFL201	DFL202	DFL204	DFL206	DFL208	DFL210	Unit
Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	VDC	50	100	200	400	600	800	1000	V
Maximum average output rectified current	Io(AV)	2.0							A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	IFSM	50							A
Rating for fusing (t≤8.3ms)	I ² t	10							A ² s
Operating junction and storage temperature range	TJ, TSTG	- 55 to + 150							°C

Electrical Characteristics (TA = 25 °C unless otherwise noted)

Parameter	Test Conditions	Symbol	DFL2005	DFL201	DFL202	DFL204	DFL206	DFL208	DFL210	Unit
Maximum instantaneous forward voltage	IF=1A	V _F	1.1							Volts
Maximum DC reverse current at rated DC blocking voltage	TA=25°C	I _R	5							μA
	TA=125°C		100							
Typical junction	4.0 V, 1 MHz	C _J	21							pF



DFL2005 thru DFL210

Surface Mount Glass Passivated Single Phase Bridge Rectifier
Reverse Voltage 50~1000V Ountput Current 2A

Thermal Characteristics (Ta=25°C unless otherwise noted)

Parameter	Test Conditions	Symbol	DFL2005	DFL201	DFL202	DFL204	DFL206	DFL208	DFL210	Unit
Typical thermal resistance ¹⁾	juntion to ambient	R _{θJA}	45							°C/W
	juntion to case	R _{θJC}	15							

Note:1),The thermal resistance from junction to ambient and case,mounted on P.C.B with 13×13mm copper pads,2 OZ,FR4 PCB

Ratings and Characteristics Curves

(TA = 25°C unless otherwise noted)

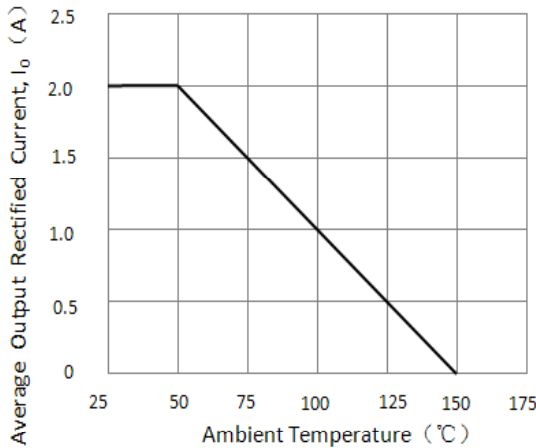


Figure 1. Forward Current Derating Curve

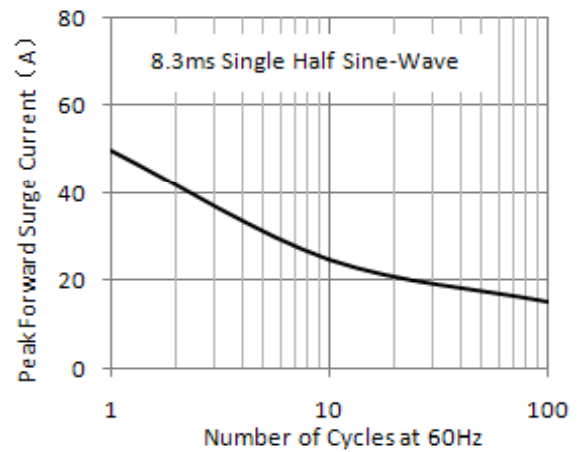


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current

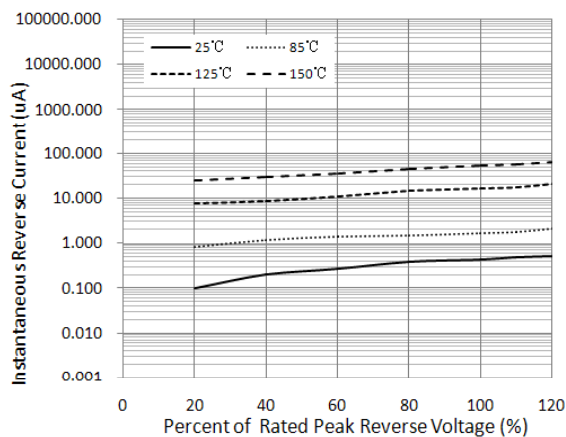


Figure 3. Typical Reverse Characteristics


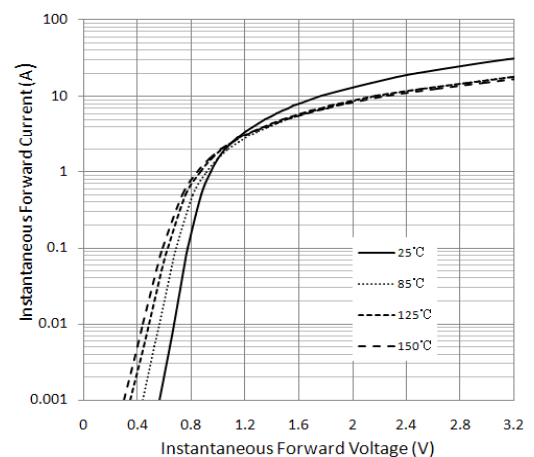


Figure 4. Typical Instantaneous Forward Characteristics

Package Outline Dimensions

in inches (millimeters)

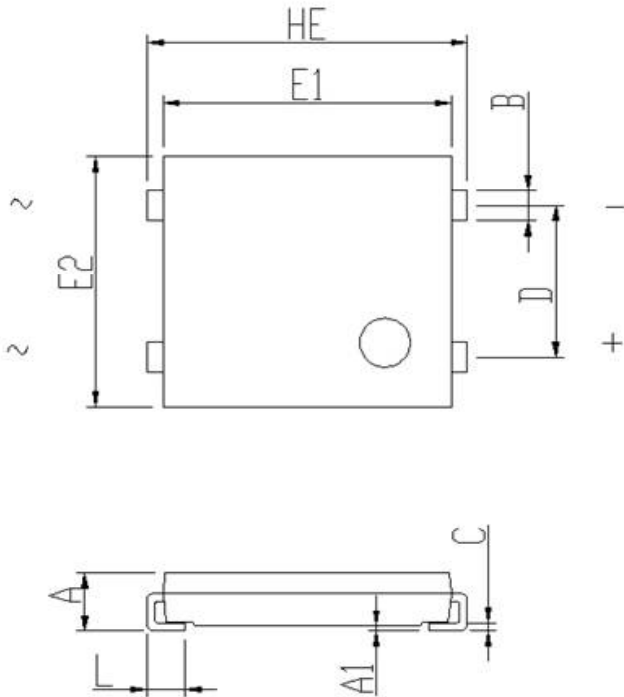

Package	DFL	
Unit: mm	MIN	MAX
A	1.7	2
A1	0.05	0.25
B	0.85	1.15
C	0.2	0.35
D	5.08 typ	
E1	8.95	9.25
E2	8.13	8.51
L	1	1.5
HE	9.8	10.3



Disclaimers

These materials are intended as a reference to assist our customers in the selection of the Suzhou Good-Ark product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Suzhou Good-Ark Electronics Co., Ltd. or a third party.

Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Suzhou Good-Ark Electronics Co., Ltd. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized Suzhou Good-Ark Electronics Co., Ltd. for the latest product information before purchasing a product listed herein. The information described here may contain technical inaccuracies or typographical errors. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors. Please also pay attention to information published by Suzhou Good-Ark Electronics Co., Ltd. by various means, including our website home page.
(<http://www.goodark.com>)

When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, Please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

The prior written approval of Suzhou Good-Ark Electronics Co., Ltd. is necessary to reprint or reproduce in whole or in part these materials.

Please contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized distributor for further details on these materials or the products contained herein.