Micro Commercial Components
21201 Itasca Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

DR750 THRU DR7510

6 Amp Glass Passivated Rectifier 50 - 1000 Volts

Features

- Low Cost
- High Current Capability
- High Surge Current Capability
- Low Leakage

Maximum Ratings

- Operating Temperature: -50°C to +150°C
- Storage Temperature: -50°C to +150°C
- Maximum Thermal Resistance; 10°C/W Junction To Ambient


MCC Catalog Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
DR750	---	50V	35V	50V
DR751	---	100V	70V	100V
DR752	---	200V	140V	200V
DR754	---	400V	280V	400V
DR756	---	600V	420V	600V
DR758	---	800V	560V	800V
DR7510	---	1000V	700V	1000V

Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	6.0A	T_A = 60°C
Peak Forward Surge Current	I_{FSM}	200A	8.3ms, half sine
Maximum Instantaneous Forward Voltage	V_F	1.1V	I_{FM} = 6.0A; T_J = 25°C*
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	10µA 1mA	T_J = 25°C T_J = 100°C
Typical Junction Capacitance	C_J	100pF	Measured at 1.0MHz, V_R=4.0V

*Pulse test: Pulse width 300 µsec, Duty cycle 1%


R-6

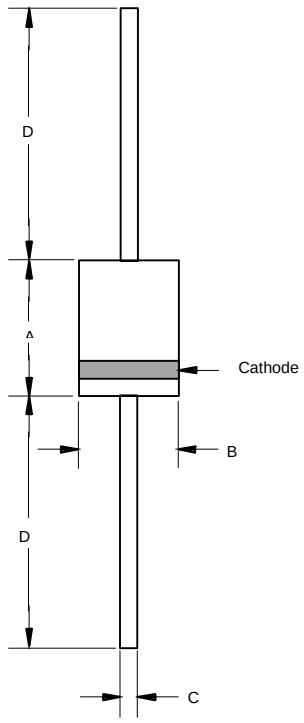

DIMENSIONS					
	INCHES		MM		
DIM	MIN	MAX	MIN	MAX	NOTE
A	.340	.360	8.60	9.10	
B	.340	.360	8.60	9.10	
C	.048	.052	1.20	1.30	
D	1.000	---	25.40	---	


DR750 thru DR7510

Figure 1
Typical Forward Characteristics

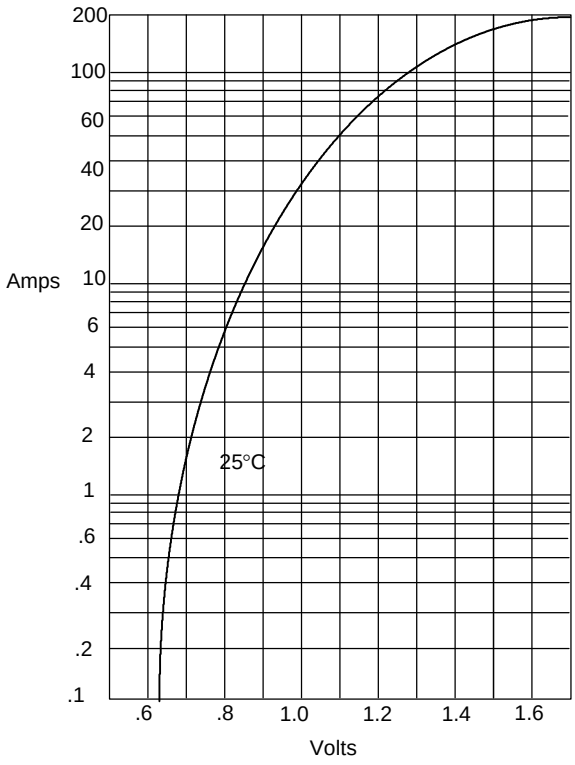


Instantaneous Forward Current - Amperes *versus*
Instantaneous Forward Voltage - Volts

Figure 2
Forward Derating Curve

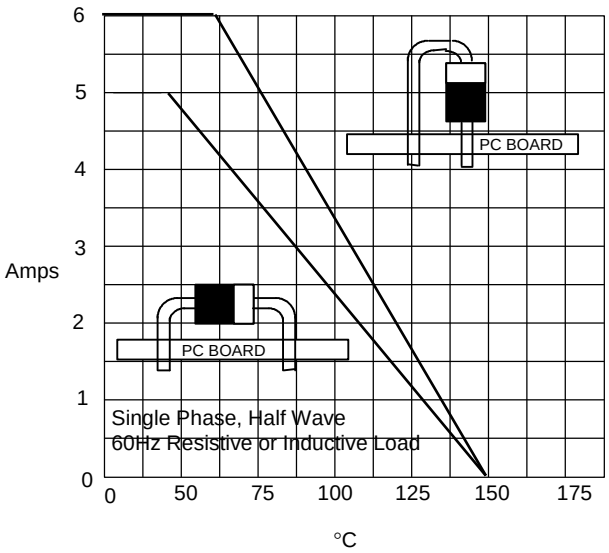


Average Forward Rectified Current - Amperes *versus*
Ambient Temperature -°C

Figure 3
Typical Thermal Resistance versus Lead Length

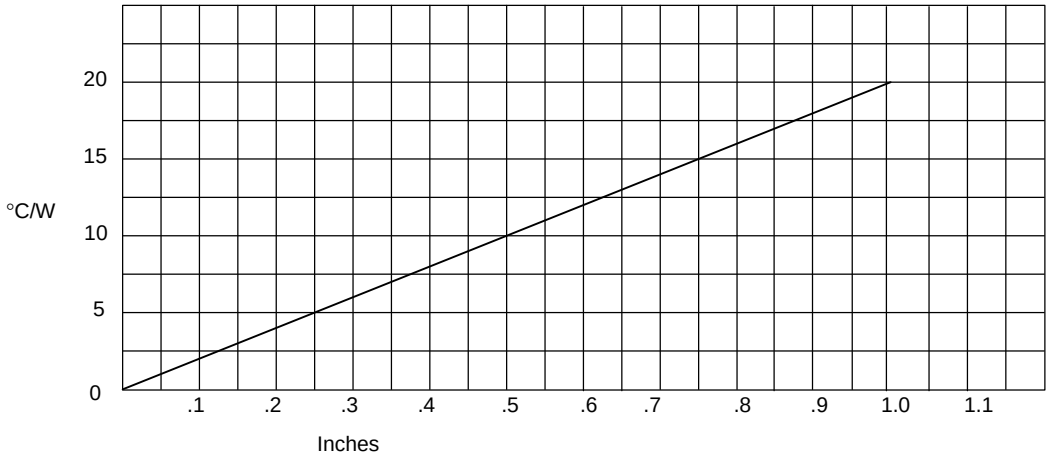


Thermal Resistance -°C/W *versus*
Equal Lead Length To Heat Sink - Inches

Figure 4
Typical Reverse Characteristics

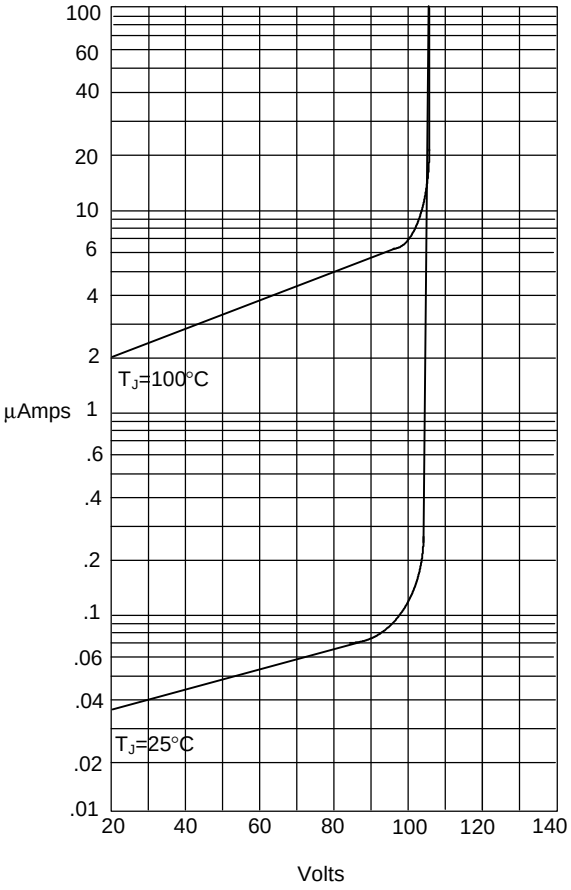

Instantaneous Reverse Leakage Current - MicroAmperes *versus*
Percent Of Rated Peak Reverse Voltage - Volts

Figure 5
Maximum Non-Repetitive Forward Surge Current

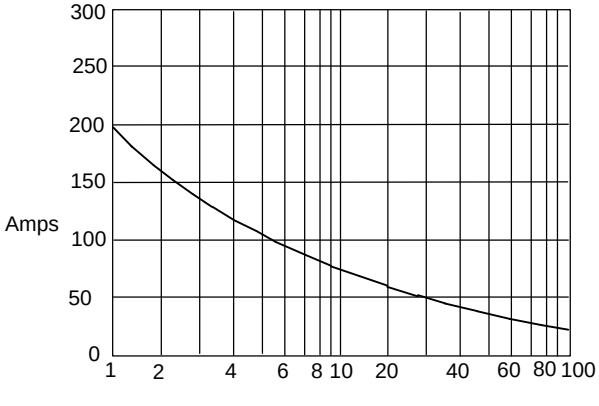

Peak Forward Surge Current - Amperes *versus*
Number Of Cycles At 60Hz - Cycles