


SANYO Semiconductors

DATA SHEET

LB8652T Monolithic Digital IC LB8652LP Driver for Digital Still Cameras

Features

- Actuator driver for digital camera built into one chip (no simultaneous drive)
 - (1) Saturation output for AF - stepping motor (two-phase, 1 - 2 phases excitation possible)
 - (2) Constant current control output for SH - VCM
 - Response speed stabilized by means of a rapid charge circuit and rapid discharge circuit
 - Shutter close control possible with the input one-port
 - Current setting possible separately for the shutter "OPEN" and "CLOSE"
(Open loop control for the shutter "OPEN")
 - (3) Saturation output for AE - VCM or stepping motor applicable (2-phase, 1 - 2 phases excitation possible)
 - (4) Constant-voltage output for ZOOM - DC motor (forward/reverse/braking) or saturation output stepping motor (two-phase, 1 - 2 phases excitation possible)

- Applications of various actuators possible.

	SH	AE	AF	ZOOM
Application Example 1	VCM	VCM	STM	DCM
Application Example 2	VCM	VCM	STM	STM
Application Example 3	VCM	STM	STM	DCM

- No standby current consumption (or zero).
- 2 system power source (VB : for DC motor, V_{CC} : others)
- Low saturation output
- Built-in thermal protection circuitry
- Small and thin package: TSSOP24 (225mil) for LB8652T and VQFN44 (5.0×5.0) for LB8652LP

■ Any and all SANYO Semiconductor Co.,Ltd. products described or contained herein are, with regard to "standard application", intended for the use as general electronics equipment (home appliances, AV equipment, communication device, office equipment, industrial equipment etc.). The products mentioned herein shall not be intended for use for any "special application" (medical equipment whose purpose is to sustain life, aerospace instrument, nuclear control device, burning appliances, transportation machine, traffic signal system, safety equipment etc.) that shall require extremely high level of reliability and can directly threaten human lives in case of failure or malfunction of the product or may cause harm to human bodies, nor shall they grant any guarantee thereof. If you should intend to use our products for applications outside the standard applications of our customer who is considering such use and/or outside the scope of our intended standard applications, please consult with us prior to the intended use. If there is no consultation or inquiry before the intended use, our customer shall be solely responsible for the use.

■ Specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

SANYO Semiconductor Co., Ltd.

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

LB8652T, LB8652LP

Specifications

Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Maximum Power Source Voltage	VB max	VB	10.5	V
	V _{CC} max	V _{CC}	10.5	
Maximum Applied Input Voltage	V _{IN} max	MD1 to 3, IN1 to 4	10.5	V
Maximum Applied Output Voltage	V _{OUT} max	OUT1 to 8	10.5	V
Maximum Output Current 1	I _O max1	OUT1	400	mA
Maximum Output Current 2	I _O max2	OUT2, 3, OUT5 to 7	600	mA
Maximum Output Current 3	I _O max3	OUT4, OUT8	800	mA
Allowable Power Dissipation	Pd max1	Substrate mounting (*1) [LB8652T]	800	mW
	Pd max2	Substrate mounting (*2) [LB8652LP]	1400	
Operating Temperature	T _{opr} 1		-20 to +80	°C
Storage Temperature	T _{stg}		-55 to +150	°C

(*1) Standard mounting substrate : 76.1mm×114.3mm×1.6mm glass epoxy resin (1 layerPWB)

(*2) Standard mounting substrate : 40.0mm×50.0mm×0.8mm glass epoxy resin (2 layerPWB)

Allowable Operating Range at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Source Voltage Range	VB	(*3)	2.0 to 10	V
	V _{CC}		2.0 to 10	
Input Pin High Level Voltage	V _{INH}	MD1 to 3, IN1 to 4	1.8 to 10	V
Input Pin Low Level Voltage	V _{INL}	MD1 to 3, IN1 to 4	-0.3 to 0.4	V
Constant Voltage Setting Input Range	VOC	VC	0.8 to 2.0	V

(*3) No restriction on priority among applied voltages of VB (Battery power source),

V_{CC} (step-up power source) and V_{IN} (CPU power source).

Example1 : VB = 3.3V, V_{CC} = 4.0V, V_{IN} = 5.0V

Example2 : VB = 3.3V, V_{IN} = 5.0V

Electrical Characteristics at Ta = 25°C, VB = V_{CC} = 3V, Rf = 1Ω

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Standby Current Consumption	I _{CC0}	VB = V _{CC} = 8.0V MD1 to 3, IN1 to 4 = L		0.1	5.0	μA
V _{CC} Operating Current Consumption	I _{CC1}	AF mode IN1, 3 = H (2 phase excitation)		24	32	mA
	I _{CC2}	AF mode IN3 = H (1 phase excitation)		14	21	
	I _{CC3}	SH mode IN1 = L		42	54	
	I _{CC4}	SH mode IN1 = H RILM = 2kΩ		18	24	
VB Operating Current Consumption	IB	DC-ZOOM mode IN3 = H		7	15	mA
Reference Voltage	V _{ref}	I _{ref} = -1mA	1.74	1.8	1.86	V
Reference Voltage start-up time	T _r	Design guaranteed		0.5	2.0	μs
Input Pin Current	I _{IN}	V _{IN} = 5.0V		70	90	μA
Overheat Protection Operation Temperature	THD	Design guaranteed (*4)	160	180	200	°C
Stepping motor driver for AF (OUT2 to 3, OUT6 to 7)						
Output Saturation Voltage 1	VSAT1	V _{CC} = 3.3V, I _O = 0.2A (upper and lower)	0.15	0.25	0.40	V
AE driver (OUT5 to 6)						
Output Saturation Voltage 2	VSAT2	V _{CC} = 3.3V, I _O = 0.2A (upper and lower)	0.15	0.25	0.40	V
SH driver (OUT1 to 2)						
Output Constant Current 1	I _{O1}	OUT2→OUT1 V _{CC} = 3.0 to 3.7V, Rf = 1Ω	194	206	218	mA
Output Constant Current 2	I _{O2}	OUT1→OUT2 V _{CC} = 3.3V RILM = 1.6kΩ	130	160	190	
Output Saturation Voltage 3	VSAT3	OUT2→OUT1 V _{CC} = 3.3V, I _O = 0.2A (upper and lower)	0.15	0.25	0.40	V

(*4) For the characteristic within the guaranteed temperature range, shipping check is performed at Ta = 25°C.

For all temperature range, it is design guaranteed.

Continued on next page.

LB8652T, LB8652LP

Continued from preceding page.


Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
DC motor driver for ZOOM (OUT4 to 8)						
Output Constant Voltage	V _O	VB = 3.0 to 3.7V, VC = 1V	2.38	2.5	2.62	V
Output Saturation Voltage 4	VSAT4	VB = 3.3V, I _O = 0.3A (upper and lower)	0.2	0.3	0.45	V
Output Saturation Voltage 5	VSAT5	VB = 3.3V, I _O = 0.3A (upper)	0.1	0.18	0.25	V

Package Dimensions


unit : mm (typ)

3260A

[LB8652T]

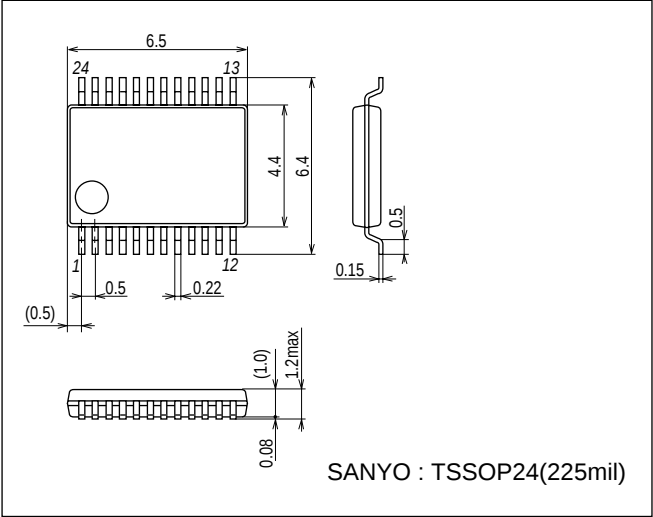

[LB8652T]

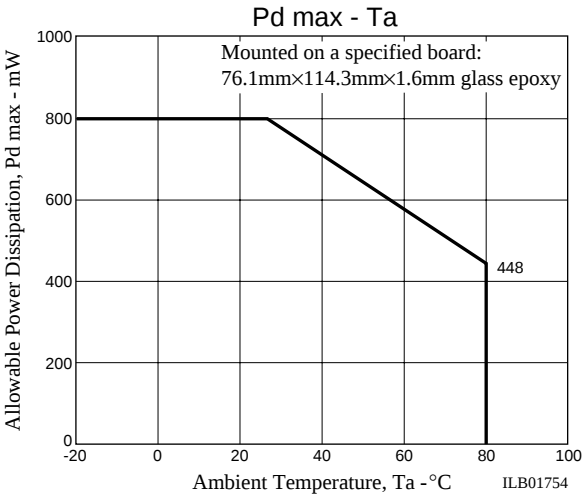


Package Dimensions


unit : mm (typ)

3302A



[LB8652LP]

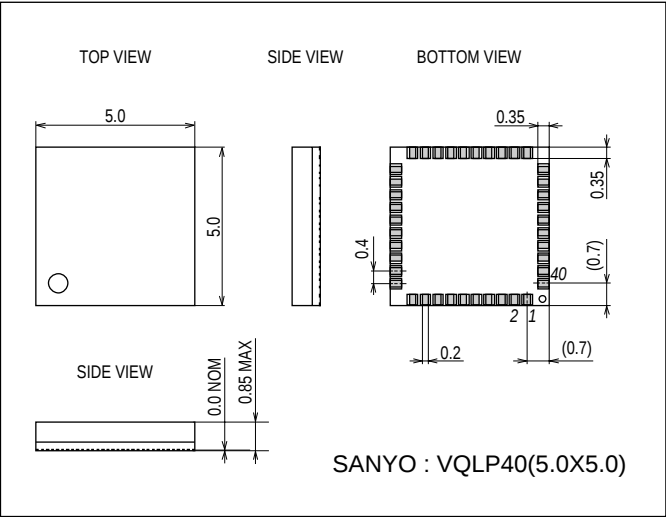

[LB8652LP]

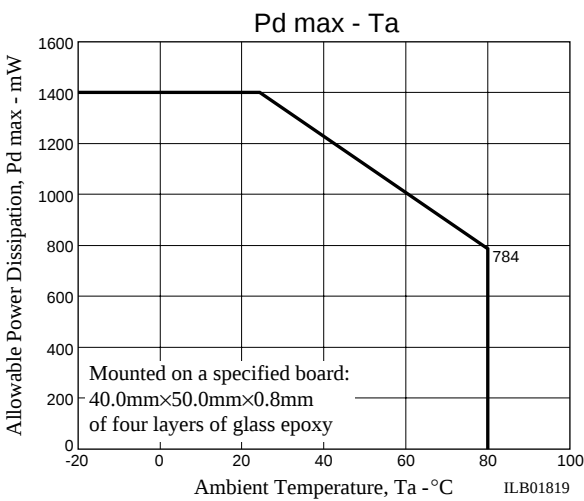

Pin Assignment

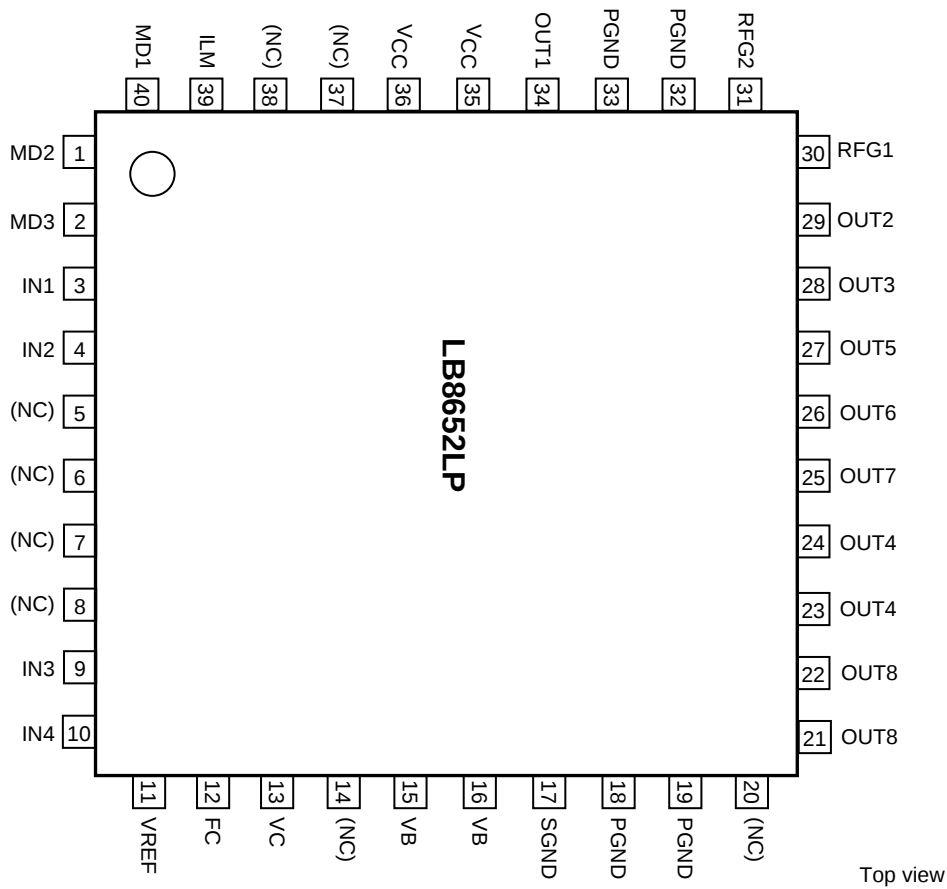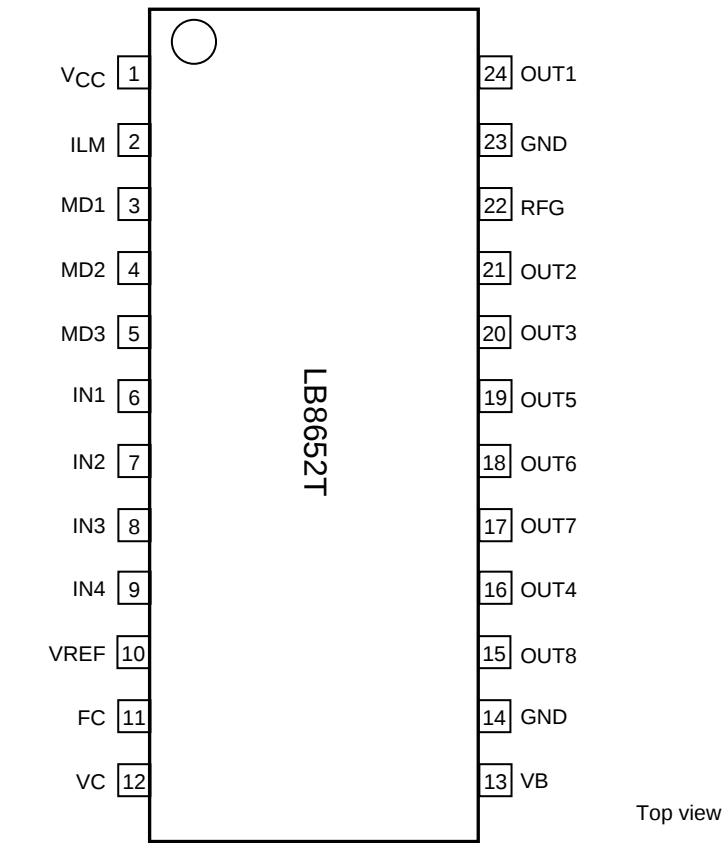

(Note) Connect all of GND pins.

True Value Table

Input								Output								Mode			
MD			IN				OUT												
1	2	3	1	2	3	4	1	2	3	4	5	6	7	8	Sample Application 1	Sample Application 2	Sample Application 3		
L	L	L	L	L	L	L	-	-	-	-	-	-	-	-	Standby				
L	L	H	L	*	*	*	<u>L</u>	H	-	-	-	-	-	-	SH(VCM) "Closed"				
			H	*	*	*	H	L	-	-	-	-	-	-	SH(VCM) "Open"				
L	H	H	L	L			-	-	-	-			-	-			AE (STM)		
			L	H			-	-	L	H			-	-					
			H	L			-	-	H	L			-	-					
			H	H			-	-	-	-			-	-					
					L	L	-	-			-	-	-	-				AE (VCM)	AE (VCM)
					L	H	-	-			L	H	-	-					
					H	L	-	-			H	L	-	-					
					H	H	-	-			-	-	-	-					
H	L	L	*	*	L	L	-	-	-	-	-	-	-	-	ZOOM (DCM)		ZOOM (DCM)		
			*	*	L	H	-	-	-	L	-	-	-	<u>H</u>					
			*	*	H	L	-	-	-	<u>H</u>	-	-	-	L					
			*	*	H	H	-	-	-	H	-	-	-	H					
H	H	L	L	L			-	-	-	-	-			-	AF (STM)				
			L	H			-	L	H	-	-			-					
			H	L			-	H	L	-	-			-					
			H	H			-	-	-	-	-			-					
					L	L	-			-	-	-	-	-				-	
					L	H	-			-	-	L	H	-					
					H	L	-			-	-	H	L	-					
					H	H	-			-	-	-	-	-					
H	L	H	L	L			-	-	-	-	-				ZOOM (STM)				
			L	H			-	-	L	H	-						-		
			H	L			-	-	H	L	-						-		
			H	H			-	-	-	-	-						-		
					L	L	-			-	-	-	-				-	-	
					L	H	-			-	-	-	L				H		
					H	L	-			-	-	-	H				L		
					H	H	-			-	-	-	-				-		
L	H	L	*	*	*	*	-	-	-	-	-	-	-	Ignore					
H	H	H	*	*	*	*	-	-	-	-	-	-	-						

(*) : Don't care.

(-) : Output OFF

(H) : Constant voltage output is 2.5 time the VC pin applied voltage.

(L) : Constant current output is (IC pin applied voltage+RFG resistor current).

Note : When the current flows from OUT1 to OUT2, easy constant current output function is ON.

The output current is controlled by the resistance value connected between the ILM pin and GND.

Points to Take into Consideration When Designing**(1) For shutter control Constant current setting (RFG1, RFG2, OUT1, OUT2)**

The constant current when flowing the current from OUT2 to OUT1 can be specified by a resistor connected between RFG and GND. (In this case, RFG1 is connected to the emitter side of NPN transistor while RFG2 is connected to the minus input side of constant-current control amplifier.) The reference voltage is generated in the IC and it is approximately 0.218V. The voltage is controlled in such a way so that the voltage generated at the resistor used for current detection connected between RFG and GND would be equal to this voltage.

The formula for calculating the output current is as given below. In addition, as a fundamental setting, it is designed so that the approx. 200mA would flow through the coil when RFG resistor is connected with 1Ω.

(Current flows from OUT2 to OUT1)

$$= 0.218V \div (\text{Resistance between RFG and GND} + 0.05\Omega) - (\text{Drive current of output Tr})$$

This 0.05Ω is for a common impedance of the output Tr emitter which drives constant current in the RFG pin and the sensing wiring for the constant current control amplifier.

Also, the drive current of output Tr is equal to 1/hfe (a 80th to 200th part approx.) of the coil current.

The constant current flowed from OUT2 to OUT1 is more accurate than that flowed from OUT1 to OUT2.

Therefore make sure to use this method for shutter closing drive.

(2) For shutter control Open-loop constant current control setting (ILM, OUT1, OUT2)

In order to prevent the high-current flowing when shutter opening, the output current control circuit is implemented for current flowing from OUT1 to OUT2. The constant current when flowing the current from OUT1 to OUT2 can be specified by a resistor connected between ILM and GND.

The formula for calculating the output current is as given below.

$$(\text{Current flows from OUT1 to OUT2}) = 1.36V \div (\text{Resistance between ILM and GND}) \times 200 \text{ approx.}$$

Due to open-loop control by which feedback signals are not sent, the accuracy of constant current is relatively inferior. It is used for shutter opening drive.

(3) Phase compensation capacitor (FC)

See and check the capacitor value for FC pin between 0.0015 to 0.033μF. Choose a capacitance value which does not cause oscillation problems for output. In particular, when a coil with large inductance is used, it is necessary to choose a sufficiently large capacitance.

(4) Constant voltage control Oscillation-stopping capacitor (OUT4, OUT8)

When controlling the constant voltages, it is necessary to place capacitors between the OUT pins to stop oscillation. See and check the capacitance value between 0.01μF to 0.1μF. Choose a capacitance value which does not cause oscillation problems for output.

When driving at saturation, there is no need for such oscillation-stopping capacitors.

(5) GND wiring and power line capacitors : (SGND, PGND, V_{CC}, VB)

Connect GND (2 places) near the IC, and place the capacitors as close as possible to each of the power pins.

- SANYO Semiconductor Co.,Ltd. assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein.
- SANYO Semiconductor Co.,Ltd. strives to supply high-quality high-reliability products, however, any and all semiconductor products fail or malfunction with some probability. It is possible that these probabilistic failures or malfunction could give rise to accidents or events that could endanger human lives, trouble that could give rise to smoke or fire, or accidents that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO Semiconductor Co.,Ltd. products described or contained herein are controlled under any of applicable local export control laws and regulations, such products may require the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written consent of SANYO Semiconductor Co.,Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO Semiconductor Co.,Ltd. product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production.
- Upon using the technical information or products described herein, neither warranty nor license shall be granted with regard to intellectual property rights or any other rights of SANYO Semiconductor Co.,Ltd. or any third party. SANYO Semiconductor Co.,Ltd. shall not be liable for any claim or suits with regard to a third party's intellectual property rights which has resulted from the use of the technical information and products mentioned above.

This catalog provides information as of January, 2008. Specifications and information herein are subject to change without notice.