Raytheon

RMM2080
2-18 GHz Wideband Variable-Gain Driver Amplifier


PRODUCT INFORMATION

Description

The Raytheon RMM2080 GaAs MMIC device is a three-stage distributed medium-power amplifier with gain control capability. The circuit incorporates ion-implanted, 0.5-µm gate MESFET devices fabricated on a semi-insulating GaAs substrate. The first two stages are 4-cell distributed amplifiers utilizing dual-gate FETs for improved gain per stage and to facilitate gain control (4x125µm & 4x250µm). The third stage is a 3-cell distributed dual-gate FET amplifier designed for high output power and efficiency (3x500µm). The RMM2080 amplifier is designed for interconnection with microstrip transmission media using fully automatic assembly techniques.

Features

- 2-18 GHz Bandwidth
- 24 dB Typical Gain
- ±2 dB Gain Flatness
- 20 dBm Output Power Typical
- Three Stages of Distributed Amplification
- Gain Control of up to 70 dB range
- Dual-Gate Ion-Implanted 0.5 µm FETs
- Chip Size: 4.14mm x 3.22mm x 0.1mm

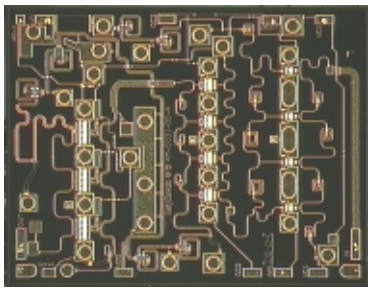

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Positive Drain DC Voltage (+7V typ)	Vd	+8	V
Negative DC Voltage	Vg	-2	V
Simultaneous (Vd-Vg)	Vgd	10	V
Positive DC Current	Id	400	mA
RF Input Power (from 50 Ω source)	P_{IN}(CW)	+8	dBm
Operating Baseplate Temperature	T_{case}	-30 to 85	°C
Storage Temperature Range	$T_{storage}$	-55 to 125	°C
Thermal Resistance (channel to backside)	R_{jc}	22	°C/W

Electrical Characteristics

(At 25°C)
50 Ω system,
Vd=+7 V,
Quiescent current (Idq) =300 mA
GC1, GC2= +1.5 V

Parameter	Min	Typ	Max	Unit
Frequency Range	2	-	18	GHz
Gate Supply Voltage (Vg)[1]		-0.7		Volts
RF Output Power @ -1 dBc		20		dBm
Small Signal Gain	18	24		dB
Gain Flatness vs. Freq.		± 2		dB
Input/Output Return Loss		7		dB

Parameter	Min	Typ	Max	Unit
Gain Control Range	70			dB
Gain Control Voltage, GC1&2[2]	-5		+1.5	Volts

Notes:
1. Typical range of the negative gate voltage is -0.9 to 0.0V to set typical Idq of 300 mA.
2. GC1 and GC2 of +1.5V and VG23=open corresponds to maximum gain and power.


Characteristic performance data and specifications are subject to change without notice.

Raytheon RF Components
362 Lowell Street
Andover, MA 01810

RMM2080
2-18 GHz Wideband Variable-Gain Driver Amplifier

PRODUCT INFORMATION

Figure 1
Block Diagram and Circuit Schematic

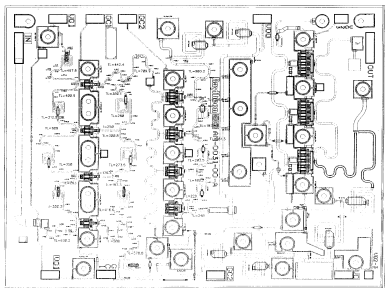


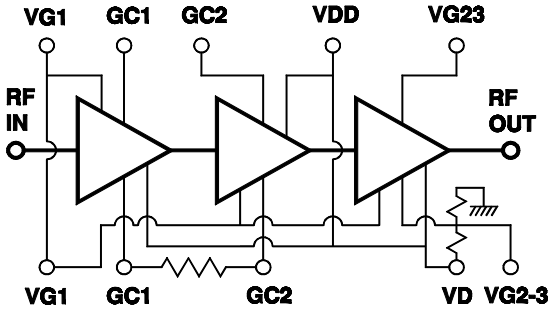



Figure 2
Location and Size of Bonding Pads

Dimensions in inches

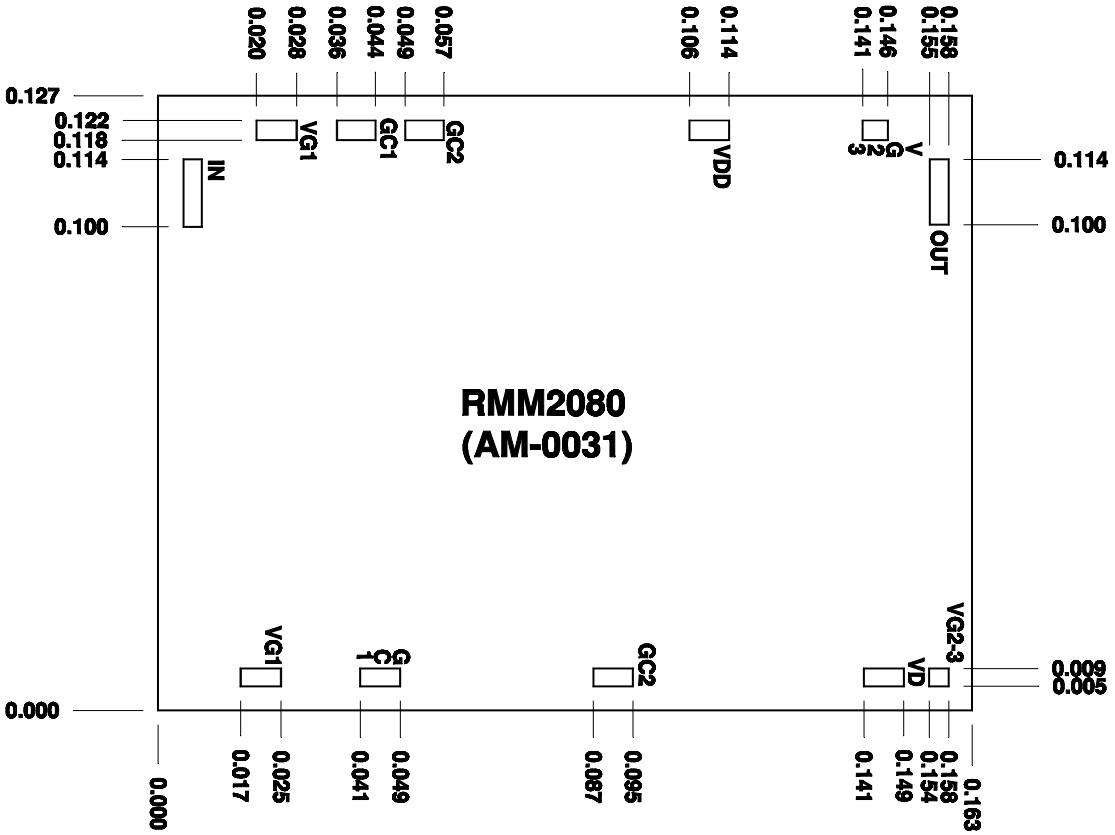


Characteristic performance data and specifications are subject to change without notice.

Figure 3
Example of
Assembled Module

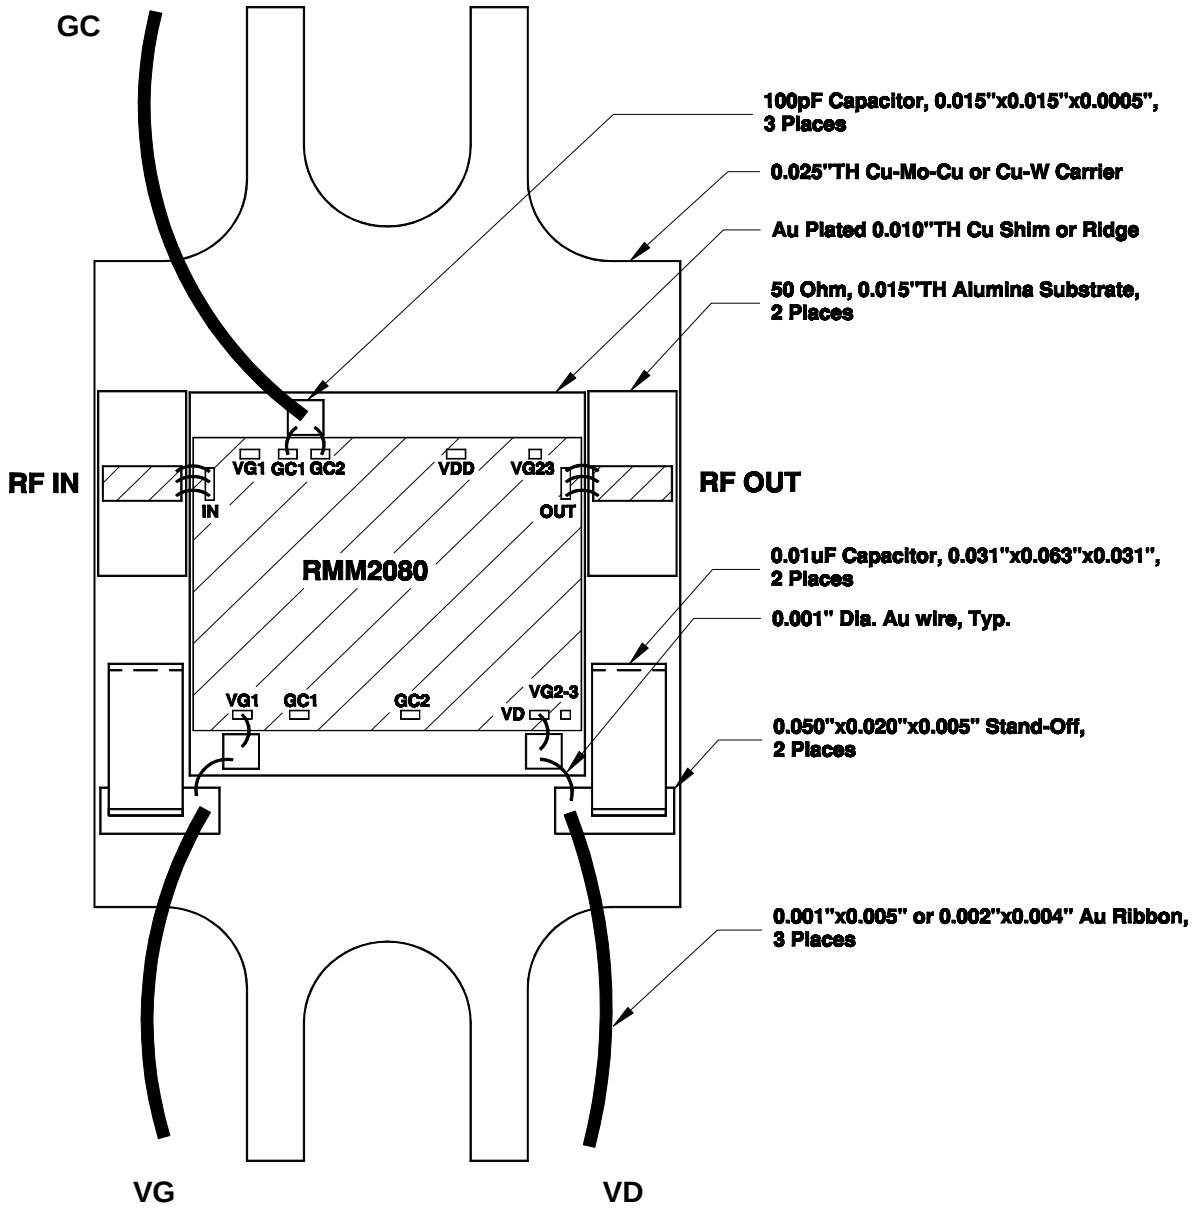


Performance Data


Input & Output Return Loss
Vd=7.0V, Id=0.3A, GC1,2=1.5V

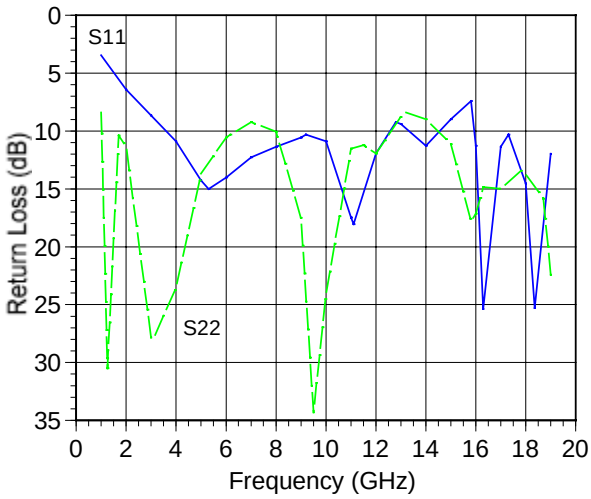

Small Signal Gain
Vd=7.0V, Id=0.3A, GC1,2=1.5V

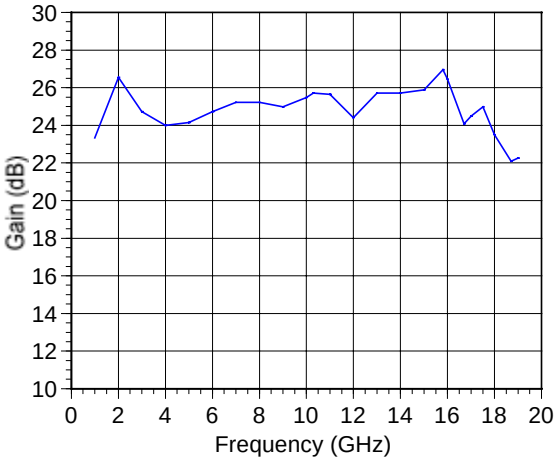

Gain & Pout vs, Control Voltage
Vd=7.0V, Id=0.3A @ GC1,2=1.5V

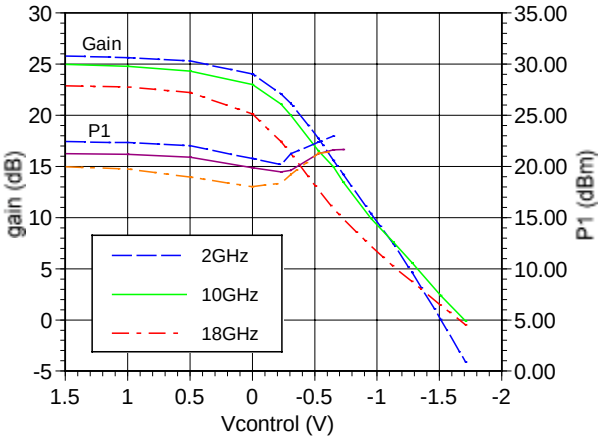

The above data is derived from fixtured measurements which include 3 parallel, 1 mil diameter, 15 mil long, gold bond wires connected to the RF input and output.

The Id @ 1 dB compression increases to approximately 0.45 A. The dc supply should be able to support the required current to achieve the above performance.

Characteristic performance data and specifications are subject to change without notice.