



SANYO Semiconductors

DATA SHEET

LB1940T

LB1940U

Monolithic Digital IC

2-ch H-Bridge Constant Current Driver

Overview

The LB1940T and LB1940U are 2-phase exciter type bipolar stepping motor driver ICs that feature low-voltage, (supporting 3V battery) and low current operation with low saturation voltage. These ICs enable constant-current control of actuators, and are optimal for driving the actuators of PC peripherals such as USB compatible scanners, FDDs, and printers, as well as for controlling the shutter, iris, and AF of a digital still camera.

Features

- Low-voltage driving
2-power source type: $V_S = 1.6$ to $7.5V$, $V_{DD} = 1.9$ to $6.5V$
Single power source type: $V_S = V_{DD} = 1.9$ to $7.5V$
- Low saturation output: $V_{O(sat)} = 0.3V$ at I_O of $200mA$
- Constant-current control
- Built-in reference voltage ($V_{ref} = 0.9V$)
- Small-sized, low-profile package (LB1940T: TSSOP20; 225mil; thickness (t) = 1.2mm max.)
(LB1940U: MSOP20; thickness (t) = 0.85mm max.)

Specifications

Absolute Maximum Ratings at $T_a = 25^\circ C$

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	V_B max	V_{S1} , V_{S2} , V_{DD}	-0.3 to +10.5	V
Output applied voltage	V_{OUT} max	OUT1, OUT2, OUT3, OUT4	-0.3 to +10.5	V
Output Current	I_O max		400	mA
Input applied voltage	V_{IN} max	ENA1, ENA2, IN1, IN2, VC	-0.3 to +10.5	V
Allowable power dissipation	P_d max	Mounted on a specified board *	800	mW
Operating temperature	T_{opr}		-20 to +85	$^\circ C$
Storage temperature	T_{stg}		-55 to +150	$^\circ C$

* Mounted on a Specified board: 114.3mm×76.1mm×1.6mm, glass epoxy

■ Any and all SANYO Semiconductor products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO Semiconductor representative nearest you before using any SANYO Semiconductor products described or contained herein in such applications.

■ SANYO Semiconductor assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO Semiconductor products described or contained herein.

SANYO Semiconductor Co., Ltd.

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

LB1940T/1940U

Allowable Operating Range at Ta = 25°C

Parameter	Symbol	Conditions	Ratings			unit
			min	typ	max	
Function-guaranteed voltage range	VOPR1	V _{DD} system, VS = 2.0V	1.9		6.5	V
	VOPR2	VS system, V _{DD} = 5.0V	1.6		7.5	
Low level input threshold voltage	V _{IL}	ENA1, ENA2, IN1, IN2	-0.3		1.0	V
High level input threshold voltage	V _{IH}	ENA1, ENA2, IN1, IN2	2.0		6.0	V
VC input voltage	VC		0.19		1.0	V

Electrical Characteristics at Ta = 25°C, VS = 3V, V_{DD} = 5V

Parameter	Symbol	Conditions	Ratings			unit
			min	typ	max	
Standby current dissipation	ISTB	VS = V _{DD} = 6.5V		0.1	1.0	μA
Regulator output circuit						
VREF output voltage	VREF	I _{OL} = 0 to 1mA	0.85	0.9	0.95	V
SVDD output voltage	VSVD	I _{OL} = 10mA	4.70	4.85		V
H bridge output circuit						
OUT output saturation voltage (at saturation control)	V _{O(sat)1}	V _{DD} = 5.0V, VS = 2.0V I _O = 200mA (PNP side)		0.20	0.30	V
	V _{O(sat)2}	V _{DD} = 5.0V, VS = 2.0V I _O = 200mA (NPN side)		0.10	0.15	V
OUT output current (at constant current control)	I _{OUT1}	V _{DD} = 6.0V, VC = 0.2V, VS = 3.5V R _L = 5Ω (between OUT-OUT), RFB = 2Ω	94	100	106	mA
	I _{OUT2}	$VC = \frac{R_b}{R_a + R_b} VREF \text{ (Ra = 70k}\Omega\text{, Rb = 20k}\Omega\text{) *}$ V _{DD} = 6.0V, VS = 2.0V R _L = 5Ω (between OUT-OUT), RFB = 1Ω	180	200	220	mA
VS system operating current consumption	IS1	$VC = \frac{R_b}{R_a + R_b} VREF \text{ (Ra = 70k}\Omega\text{, Rb = 20k}\Omega\text{) *}$		1.5	3	mA
V _{DD} system operating current dissipation	I _{DD1}	$VC = \frac{R_b}{R_a + R_b} VREF \text{ (Ra = 70k}\Omega\text{, Rb = 20k}\Omega\text{) *}$ ENA1 = 2V		4	7	mA
VC input current	IVC	V _{DD} = 6.0V, VS = 2.0V, VC = 1.9V	0		-1	μA
Control input circuit						
Control pin maximum input current	I _{IH}	V _{IH} = 5.5V		80	100	μA
	I _{IL}	V _{IL} = GND	-1		0	

* For Ra and Rb, refer to Application Circuit Diagram.


LB1940T/1940U

Package Dimensions

unit : mm (typ)

3246

[LB1940T]


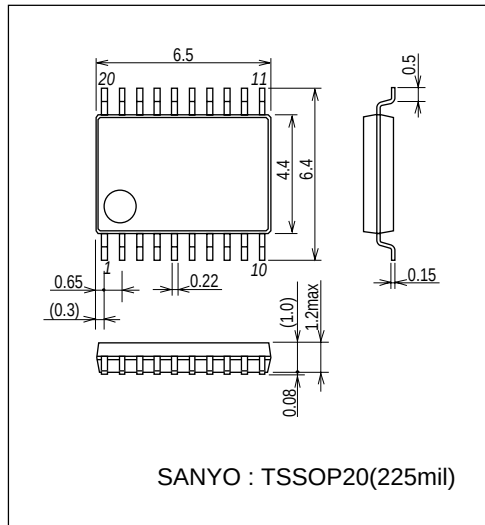


Package Dimensions

unit : mm (typ)

3262


[LB1940U]

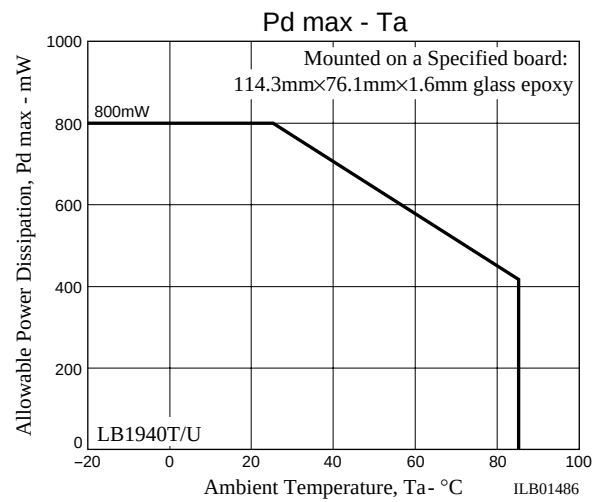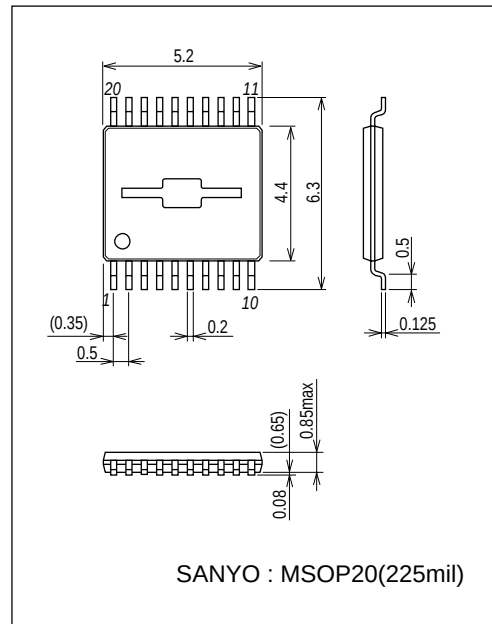

True Table

Input				Output					Mode
ENA		IN		OUT				SVDD	
1	2	1	2	1	2	3	4		
L	L								Standby (current dissipation zero)
H		H		L	H			on	Reverse rotation
		L		H	L			on	Forward rotation
	H		H			L	H	on	Reverse rotation
			L			H	L	on	Forward rotation
A blank means "don't care".				A blank means "off".					


Pin Assignment

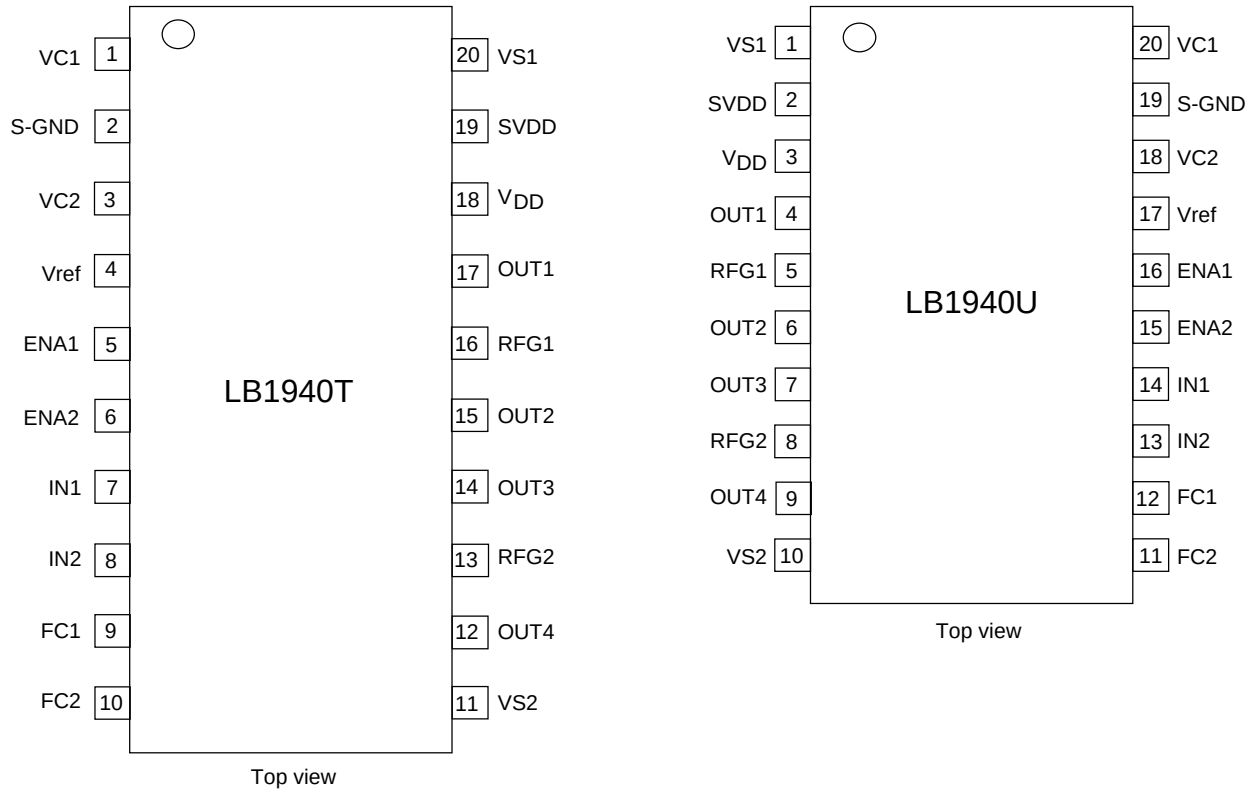


Pin Description

Pin No.		Pin Name	Description	Pin No.		Pin Name	Description
LB1940T	LB1940U			LB1940T	LB1940U		
1	20	VC1	Reference voltage input for 1ch control	1	10	VS2	Motor power supply (+)
2	19	S-GND	GND for control system	2	9	OUT4	Motor drive output 4
3	18	VC2	Reference voltage input for 2ch control	3	8	RFG2	Constant-current detection pin
4	17	Vref	Reference voltage output	4	7	OUT3	Motor drive output 3
5	16	ENA1	Signal input for 1ch control	5	6	OUT2	Motor drive output 2
6	15	ENA2	Signal input for 2ch control	6	5	RFG1	Constant-current detection pin 1
7	14	IN1	Signal input for 1ch control	7	4	OUT1	Motor drive output 1
8	13	IN2	Signal input for 2ch control	8	3	V _{DD}	Control system power supply (+)
9	12	FC1	C connection pin for 1ch phase compensation	9	2	SVDD	Control system power output
10	11	FC2	C connection pin for 2ch phase compensation	10	1	VS1	Motor power supply (+)

Block Diagram

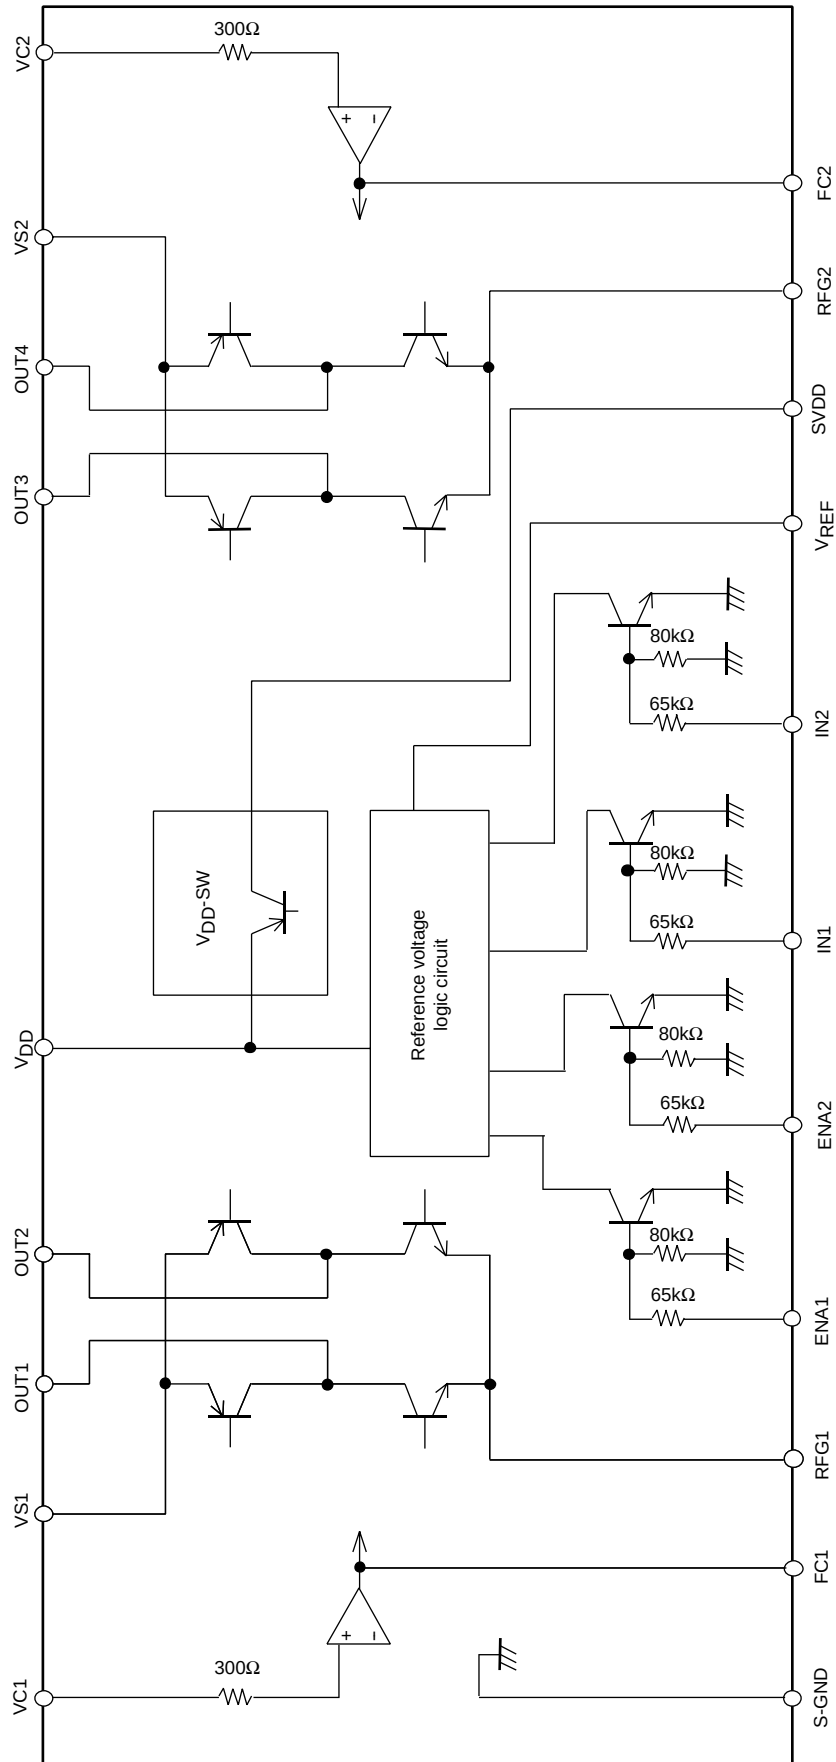

Application Circuit Diagram

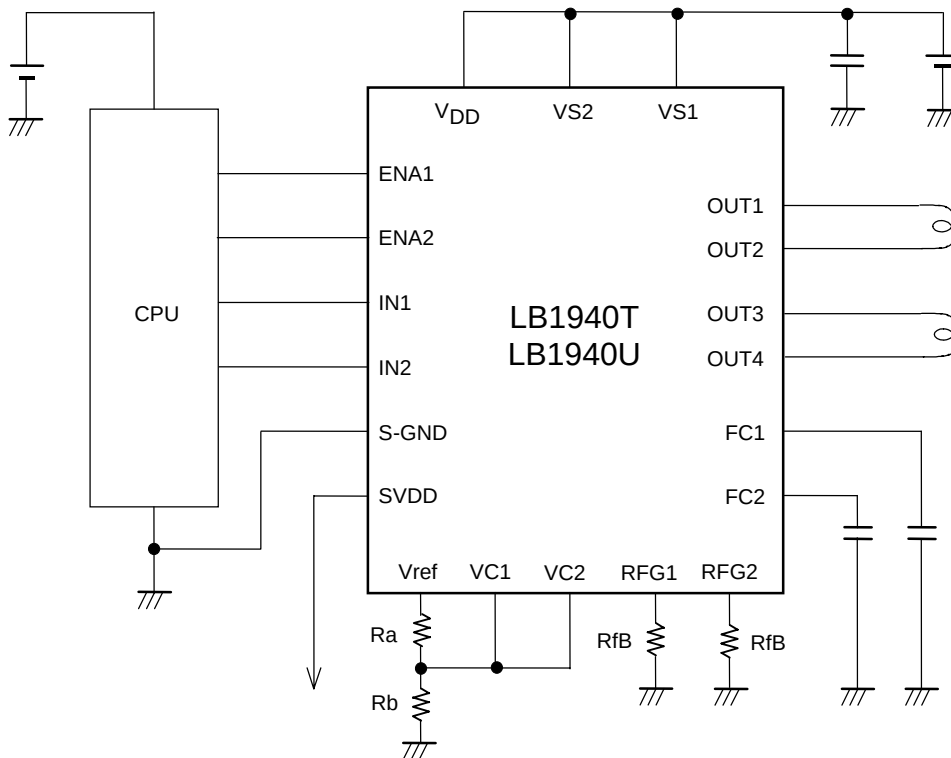

At constant-current control: The OUT current is controlled so that the RFG pin voltage is equal to the VC input pin voltage.

For example, $I_{OUT} = 200\text{mA}$ ($= 0.2\text{V}/1\Omega$) when $VC = 0.2\text{V}$ and $R_{FB} = 1\Omega$.

*: There is no priority relationship between respective input voltages (ENA, IN) and respective supply voltages (V_{DD} , VS). For example, operation with $V_{IN} = 5\text{V}$, $V_{DD} = 3\text{V}$, $VS = 2\text{V}$ is possible.

Note: The input voltage range to the reference voltage input pin VC for constant-current setting is from 0.19V to 1.0V.

Constant current setting

The composition of the constant-control circuit of this IC is as shown in the figure below.

The voltage entered in the VC pin is entered as a reference to the “+” side input of the constant-current control amplifier.

The “-” side of this constant-current control amplifier is connected to the RFG pin via the wire bonded resistor R_b ($= 0.1\Omega$).


The constant-current control circuit consists of comparison of the voltage generated at the external current detection resistor with the above reference voltage.









In addition, since the bias current I_b ($= 1.5\mu\text{A}$) flows out of the positive (+) input of the constant current control amplifier during the constant current control, if the voltage is input to the VC pin by dividing the V_{REF} voltage by 4.5 according to the dividing resistance ($70\text{k}\Omega$ and $20\text{k}\Omega$) as shown in the figure, the formula for calculating the VC voltage is as follows :



$$VC = V_{REF}/4.5 + I_b \times 20\text{k}\Omega = V_{REF}/4.5 + 0.03$$

Therefore, the theoretical equation to set the constant current I_{OUT} is as follows:

$$I_{OUT} = VC/(R_{FB} + R_b) = (V_{REF}/4.5 + 0.03)/(R_{FB} + R_b)$$

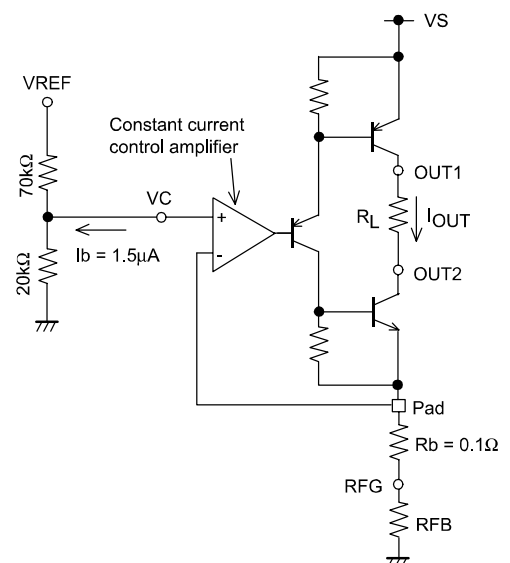

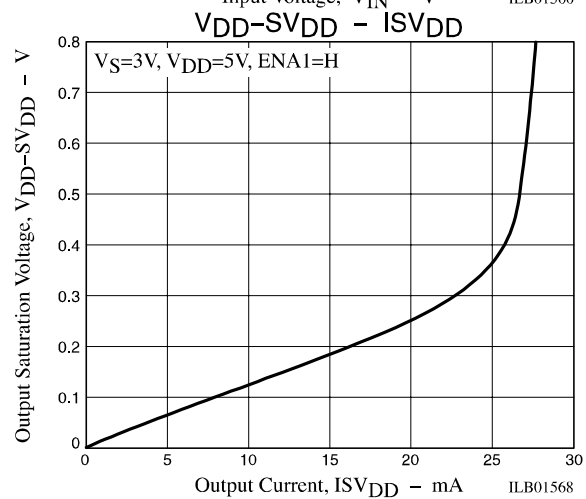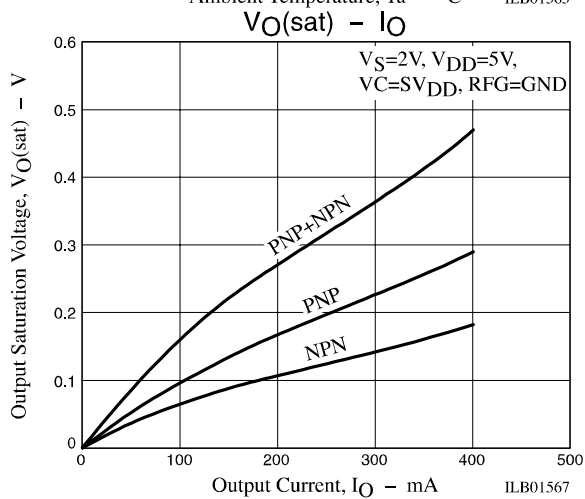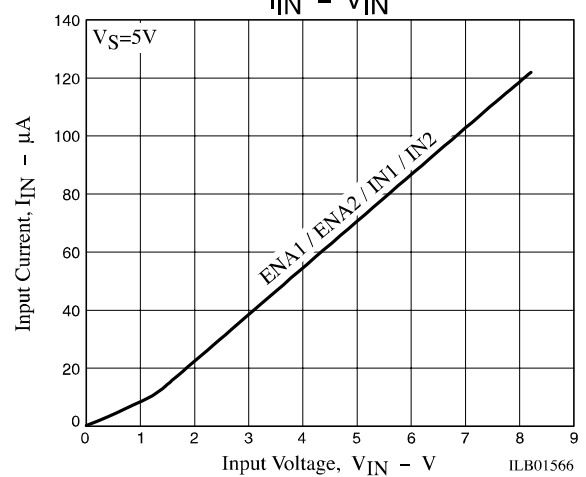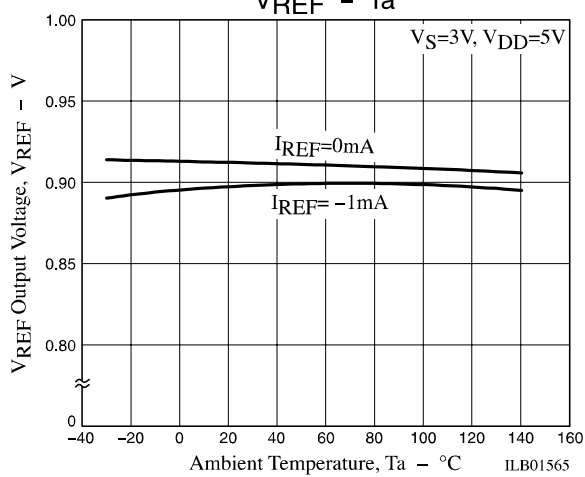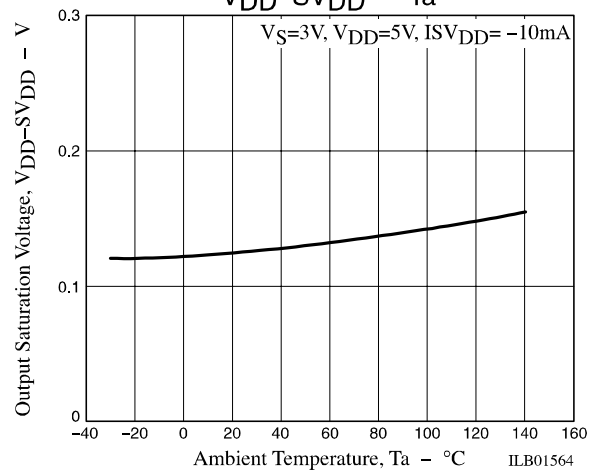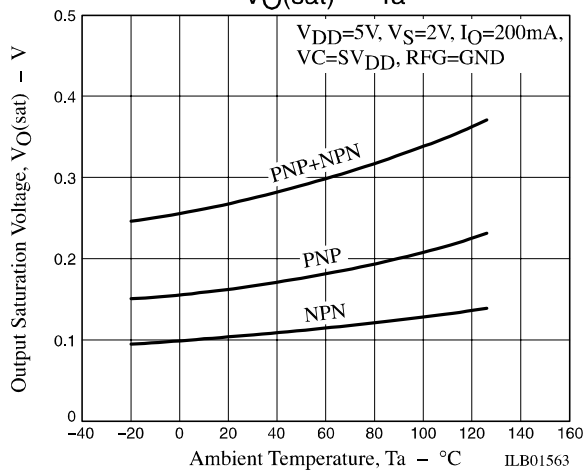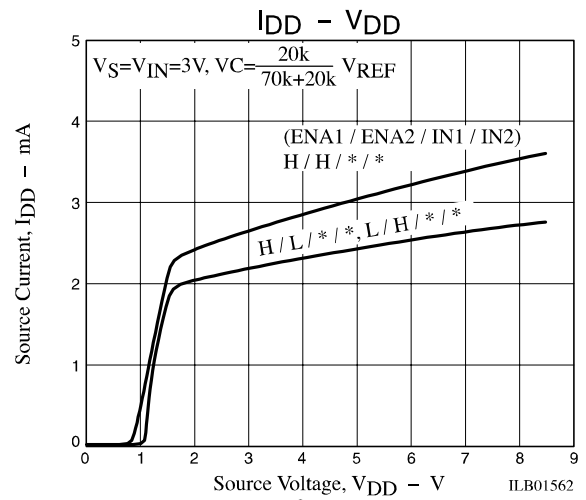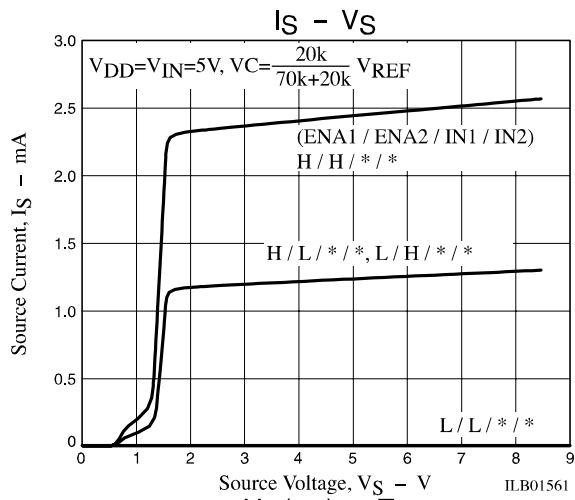

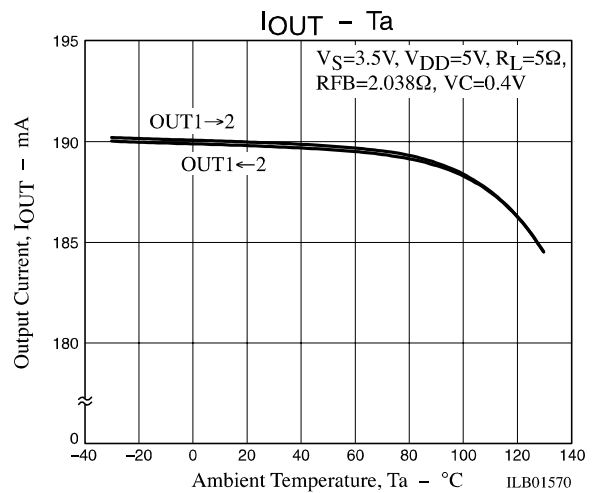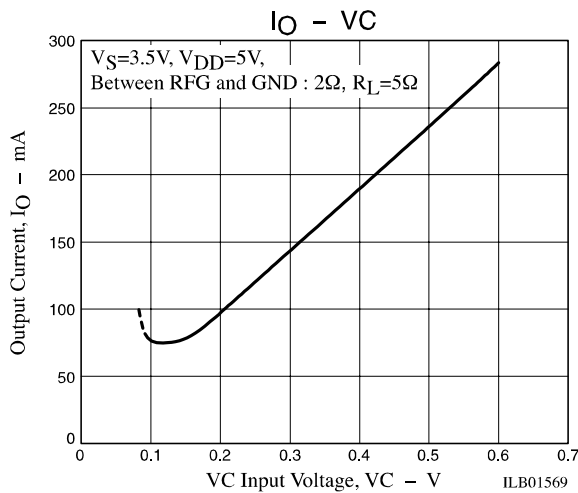

- Specifications of any and all SANYO Semiconductor products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Semiconductor Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO Semiconductor products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Semiconductor Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO Semiconductor product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO Semiconductor believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of December, 2006. Specifications and information herein are subject to change without notice.