



52 PIN PLCC SOCKET ADAPTER

Model : HA52PL48DB

These adapters connect the pins of a 52 pin PLCC device to a 48 pin DIP equivalent. They accept a PLCC device and plug into a DIP socket.




Order No.

► HA52PL48DB

The Jumpers are indicated between #18(PLCC) and #14(DIP)

Socket manufacture (Yamaichi), Socket type (Clam shell)

The HA52PL48DB socket adapter accepts Motorola 52-pin PLCC packages.

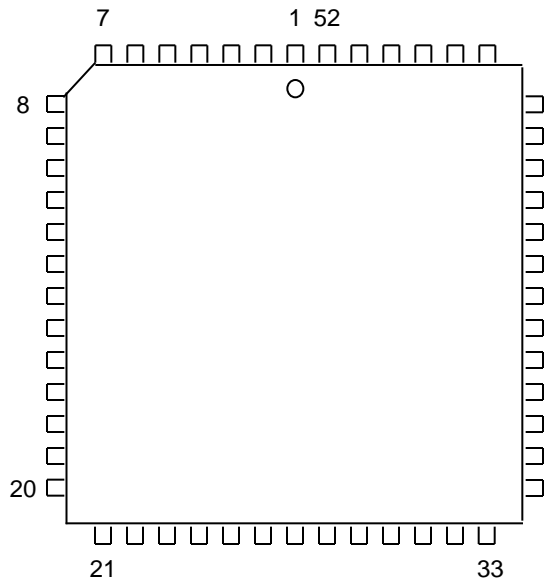

The following chart shows the connections from the PLCC socket to the adapter's DIP plug.

PLCC52	DIP48	DIP48	PLCC52
34	1	48	42
33	2	47	41
32	3	46	40
31	4	45	39
1	5	44	38
30	6	43	37
29	7	42	36
28	8	41	35
27	9	40	-
25	10	39	-
24	11	38	-
23	12	37	21
22	13	36	20
18	14	35	19
-	15	34	17
-	16	33	16
Note 1	17	32	15
-	18	31	14
2	19	30	13
3	20	29	12
4	21	28	11
6	22	27	10
7	23	26	9
8	24	25	26

* Note 1

PLCC – 43, 44, 45, 46, 47, 48, 49, 50, 51, 52



E.E. Tools, Inc.

4620 Fortran Dr. Ste 102
 San Jose, CA 95134, USA
 Tel: (408)263-2221 Fax: (408)263-2230
 Web : www.eetools.com
 Email : sales@eetools.com

Date 02/17/03
 Page 1 of 1
 Rev 1.0

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[EETools:](#)

[PA52-48A-1](#)