
Tous droits strictement reserves. Reproduction ou communication o des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du propietaire. Propriete de c FCI. Droits de reproduction FCI.

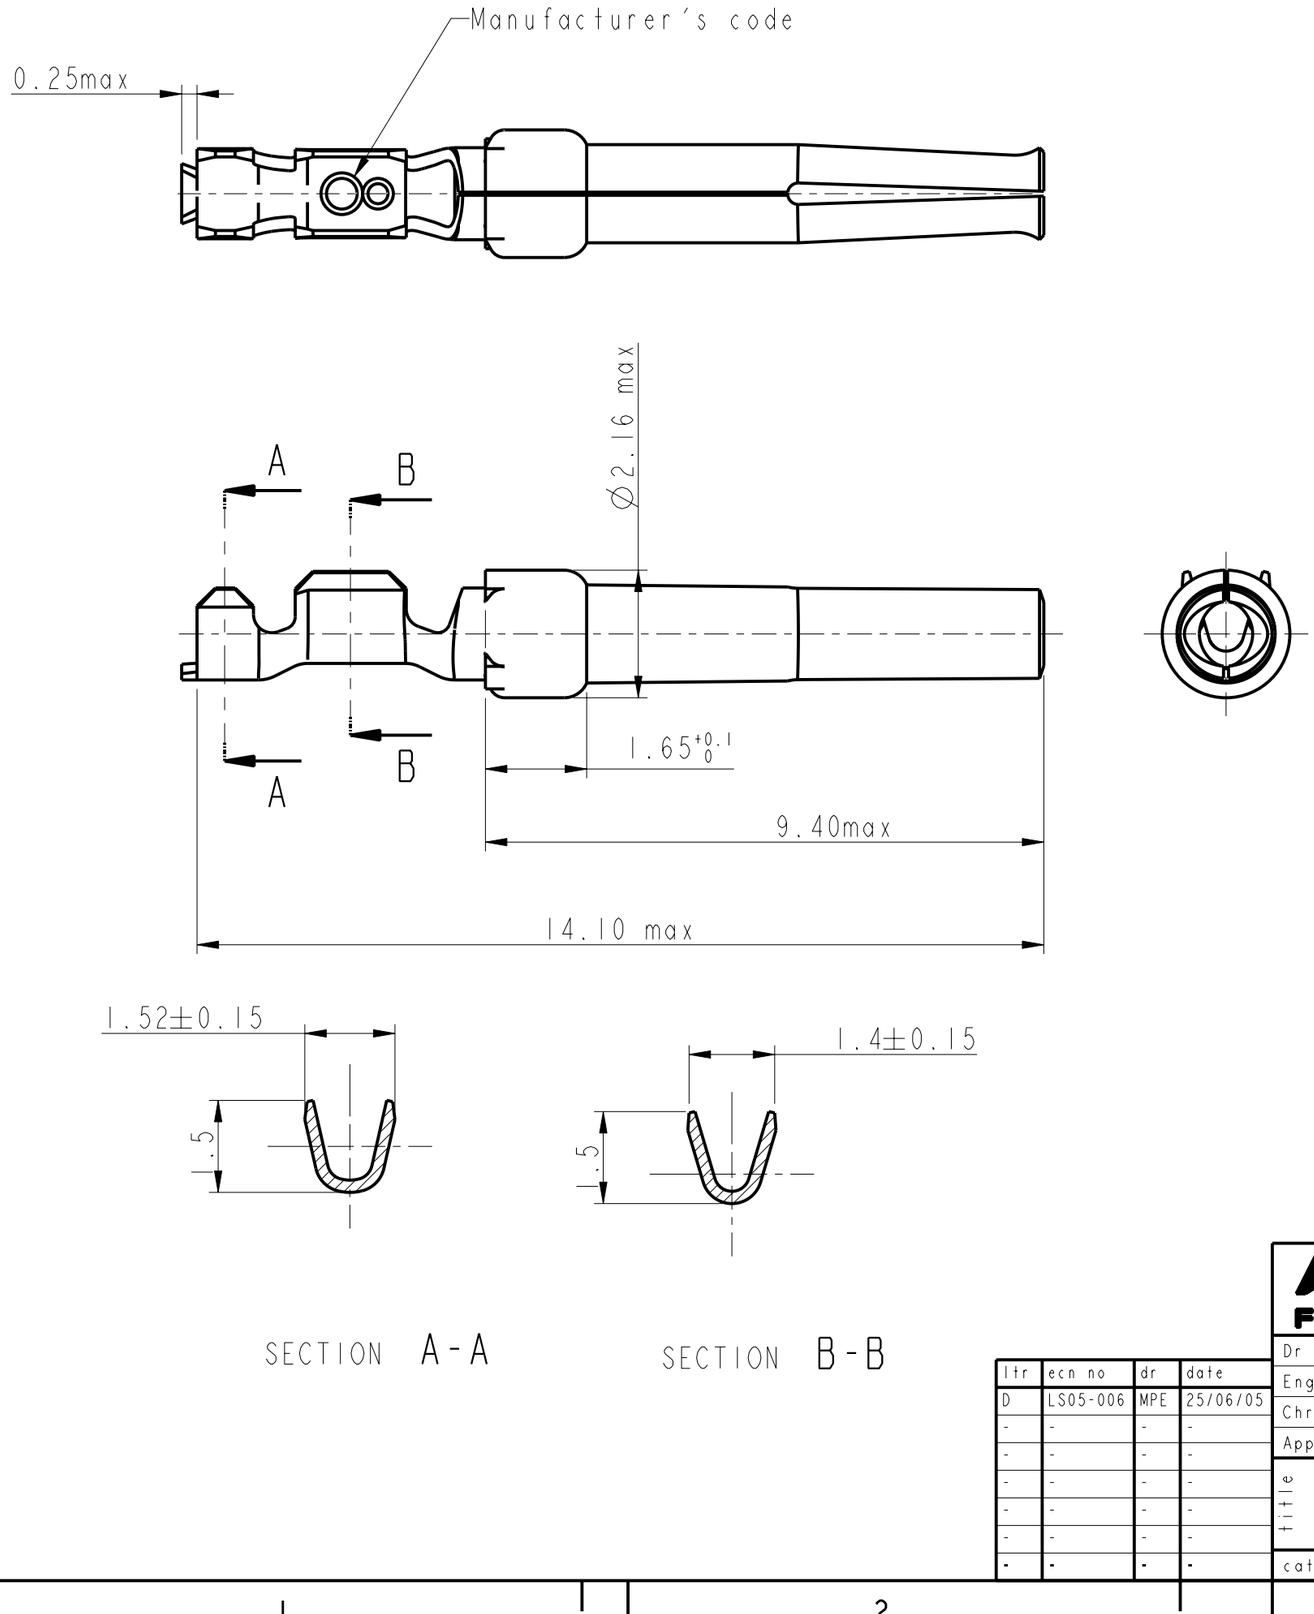

NOTES:

1-Material:phosphor bronze,thickness 0.20
2-Finish on contact area:see table
finish on termination:bright tin lead over nickel
3-Wire range:24 to 28 AWG
4-Max outer dia of wire insulator:1.02 mm
5-Current carrying capacity per contact:
3.Amps max when crimped to #24 AWG
2 Amps max when crimped to #26 AWG
1 Amps max when crimped to #28 AWG
6-After 5 insertions into connector,
contact retention must be 5 pounds axial load min
7-When contact is crimped to 24 AWG,the insulation
support crimped height must be 1.78 mm max to ensure
a proper insertion into housing
6-Packaging:BOX of 500 contacts

NOTE : ROHS INFORMATIONS
The LF products meet European union directives and other country regulations as described in GS-22-008
Terminations plating spec : 2um Nickel min + 2um Sn min
Packaging Spec : see GS-14-930

Core range	-
8656351064LF	Flash Au
8656351064	Flash Au
PART NUMBER	Plating

ltr	ecn no	dr	date
D	LS05-006	MPE	25/06/05
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com

surface - tolerance

projection

Dr	C JARRY	28/01/97	Product family -	size A3	Scale 10:1
Eng			Spec ref		
Chr			Material SEE NOTES	ECN	
Appr					

title: CRIMP SOCKET
#Wire 24-28 in bos 500 cts

dwg no: C01-8656-1507 Rev. D

catalog no -

CUSTOMER COPY sheet 1 of 1

PDM: Rev:D STATUS:Released Printed: Sep 28, 2005

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.