


Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sans autorisation ecrite de propriete.
Propriete de FCI. Droits de reproduction FCI.




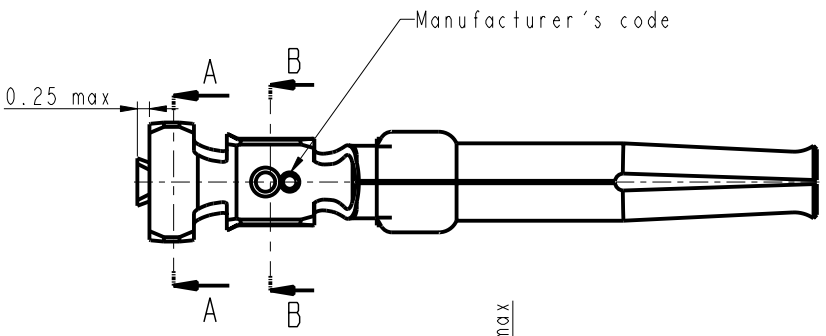

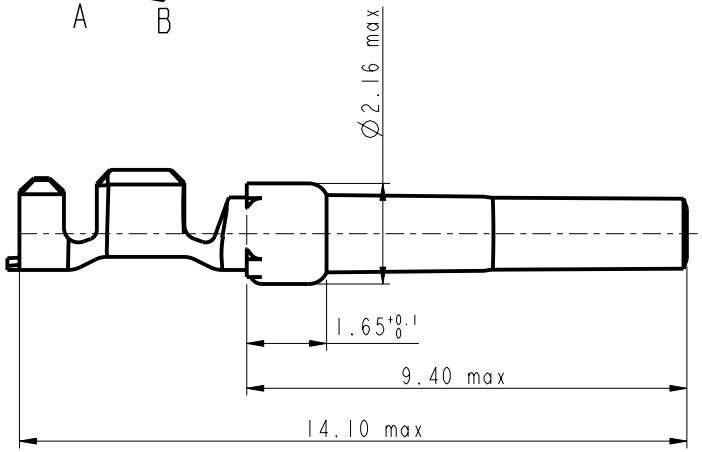



SECTION A-A



SECTION B-B

NOTES:

1-Material:phosphor bronze,thickness 0.20
2-Finish on contact area:see table
finish on termination:bright tin lead over nickel
3-Wire range:20 to 24 AWG
4-Max outer dia of wire insulator:1.73 mm
5-Current carrying capacity per contact:
5.Amps max when crimped to #20 AWG
5 Amps max when crimped to #22 AWG
3 Amps max when crimped to #24 AWG
6-After 5 insertions into connector,
contact retention must be 5 pounds axial load min
7-When contact is crimped to 20 AWG,the insulation
support crimped height must be 1.78 mm max to ensure
a proper insertion into housing
6-Packaging:Box of 500 contacts

NOTE:ROHS INFORMATIONS
The LF products meet European union directives and other country regulations as described in GS-22-008
Terminations plating spec:2µm Nickel min + 2µm Sn min
Packaging spec: see GS-14-930

CORE RANGE	.
8656353064LF	Flash Au
8656353064	Flash Au
PART NUMBER	Plating

ltr	ecn no	dr	date
D	LS05-006	MPE	14/06/05
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
•	•	•	•

www.fciconnect.com

surface - tolerance

projection

Dr	C JARRY	28/01/97	Product family	-	size A3	Scale 10:1
Eng			Spec ref			
Chr			Material	SEE NOTES	ECN	
Appr						

title: CRIMP SOCKET
#WIRE 20-24 in box 500 cts

dwg no: C01-8656-0512

Rev. D

catalog no -

CUSTOMER COPY

sheet 1 of 1

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor.
Property of FCI. Copyright FCI.

PDM: Rev:D STATUS:Released Printed: Sep 28, 2005