AN4377
Application note

Power over Ethernet - PD converter with 5 V 2 A output, standard IEEE 802.3af compliant

Antonio Rotta


Introduction

This document focuses on a product evaluation board for a simple, low cost 5 V 2 A flyback converter based on the PM8800A device.

The PM8800A is a highly integrated device embedding an IEEE 802.3af compliant “Powered Device” (PD) interface together with a PWM controller.

It can be successfully used in all low power, low cost PoE applications.

Figure 1. STEVAL-TSP005V2 demonstration board photo

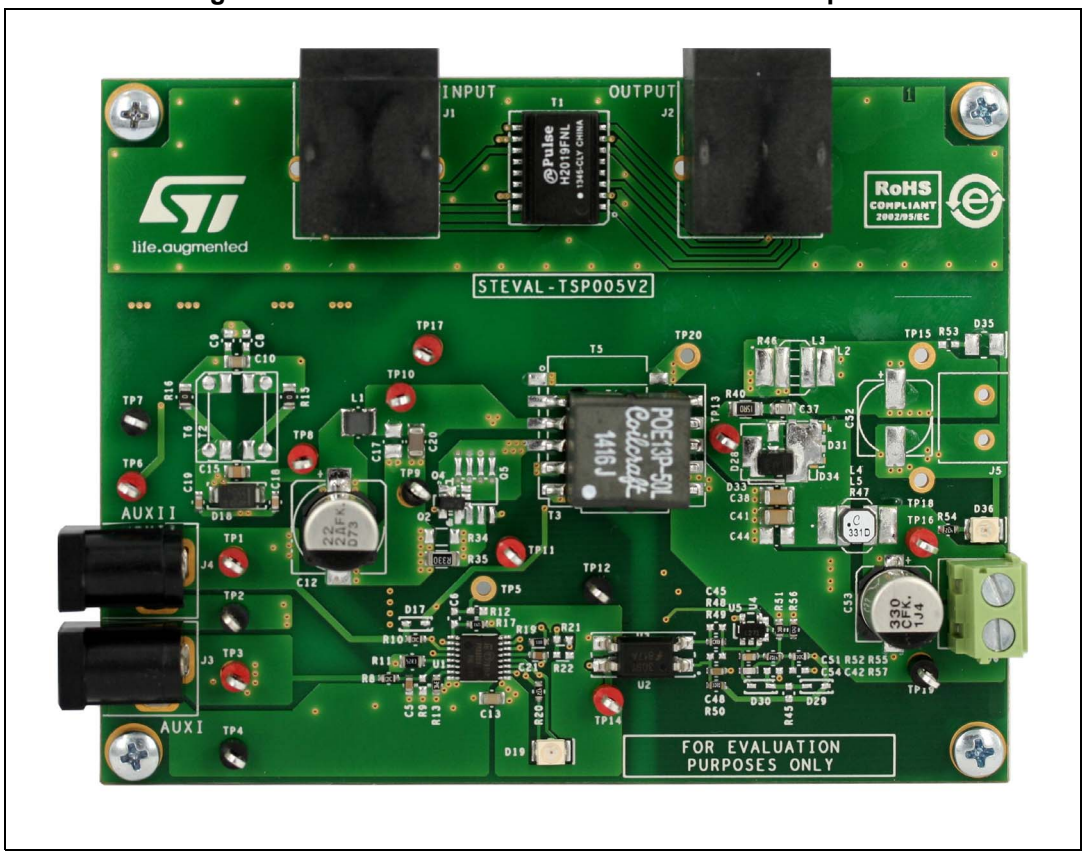

Contents

1 **Main characteristics and circuit description 4**

2 **Electrical diagram and bill of material for 5 V at 2 A 5**

3 **Measurement results 10**

3.1 Efficiency 10

3.2 Output voltage ripple 11

3.3 Startup 12

3.4 Primary side waveforms 13

3.5 Dynamic load 14

3.6 Short-circuit behavior 15

4 **Loop compensation 17**

5 **Support material 19**

6 **PCB layers 26**

7 **Revision history 28**

List of figures

Figure 1. STEVAL-TSP005V2 demonstration board photo . . . 1
Figure 2. Circuit diagram 5 V at 2 A . . . 5
Figure 3. Overall and DC/DC efficiency . . . 10
Figure 4. Efficiency input stage . . . 10
Figure 5. Ripple 5 V at 2 A . . . 11
Figure 6. Ripple 5 V at 1 A . . . 11
Figure 7. Ripple 5 V at 2 A removing L4 filter . . . 11
Figure 8. Ripple 5 V at 1 A removing L4 filter . . . 11
Figure 9. Startup - full load . . . 12
Figure 10. Startup - full load sequencing . . . 12
Figure 11. Startup - 1 A . . . 12
Figure 12. Startup - no load . . . 12
Figure 13. Steady state 2 A . . . 13
Figure 14. Steady state 1 A . . . 13
Figure 15. Steady state 100 mA . . . 13
Figure 16. Steady state no load . . . 13
Figure 17. Dynamic load 2 A - 1 A . . . 14
Figure 18. Dynamic load 2 A - 200 mA . . . 14
Figure 19. Dynamic load 750 mA - 250 mA . . . 14
Figure 20. OCP detection - full load . . . 15
Figure 21. OCP detection - no load . . . 15
Figure 22. OCP steady state - full load . . . 15
Figure 23. OCP steady state- no load . . . 15
Figure 24. OCP removed - full load . . . 16
Figure 25. OCP removed - no load . . . 16
Figure 26. Gain loop full load 48 V . . . 17
Figure 27. Gain loop half load 48 V . . . 17
Figure 28. Gain loop full load 40 V . . . 18
Figure 29. Gain loop full load 60 V . . . 18
Figure 30. Electrical diagram (general) . . . 19
Figure 31. PCB layer: top view . . . 26
Figure 32. PCB layer: layer 2 . . . 26
Figure 33. PCB layer: layer 3 . . . 26
Figure 34. PCB layer: bottom view . . . 26
Figure 35. PCB Layer: components on top side . . . 27
Figure 36. PCB Layer: components on bottom side . . . 27

1 Main characteristics and circuit description

The main characteristics (reference and electrical specifications) of the converter are listed in *Table 2*.

Table 1. Reference

Reference code	
Device	PM8800A
Demonstration board	STEVAL-TSP005V2

Table 2. Electrical specification

Parameter	Specifications
Input voltage supplies V_{IN} [Vdc]	From 40 to 60 V at 13 W
Output voltage V_{OUT} [Vdc]	5 Vdc ± 5 % at 2 A
Peak-to-peak output ripple	30 mV (120 mV without L4 output filter)
Efficiency DC-DC full load	> 86%
Efficiency overall peak	> 84%
Transient response ΔVoutpk to 50% load step	< 300 mV
ΔV in load line case	< 0.5%
GLOOP bandwidth	5 kHz
GLOOP phase margin at 0 dB	70 deg.
GLOOP dB margin at 0 deg.	-10 dB

This document details the characteristics and performances of the PM8800A demonstration kit STEVAL-TSP005V2 which has been designed to cover a broad range of power over ethernet (PoE) applications.

The PM8800A is a highly integrated device embedding an IEEE 802.3af compliant powered device (PD) interface together with a PWM controller and support for auxiliary sources.

Even though the PM8800A can be configured to work in both isolated and non-isolated topologies, single or double output; this application note focuses on a low cost isolated flyback converter topology with diode rectification, 5 V output voltage with up to a 2 A output current capability.

Auxiliary sources can be connected to the board on 2 input connectors. One input (AUX II) allows prevalence of the auxiliary sources with respect to the PoE, while the other input (AUX I) allows the usage of a wall adaptor with voltage lower than the internal PoE UVLO threshold and still benefits from the inherent inrush and DC current limit.

The above mentioned configurations are all supported by the PM8800A demonstration kit as options on the same PCB. The bill of material (BOM) in *Table 3* provides the list of components to be mounted to obtain the 5 V at 2 A demonstration board.

2 Electrical diagram and bill of material for 5 V at 2 A

Figure 2. Circuit diagram 5 V at 2 A

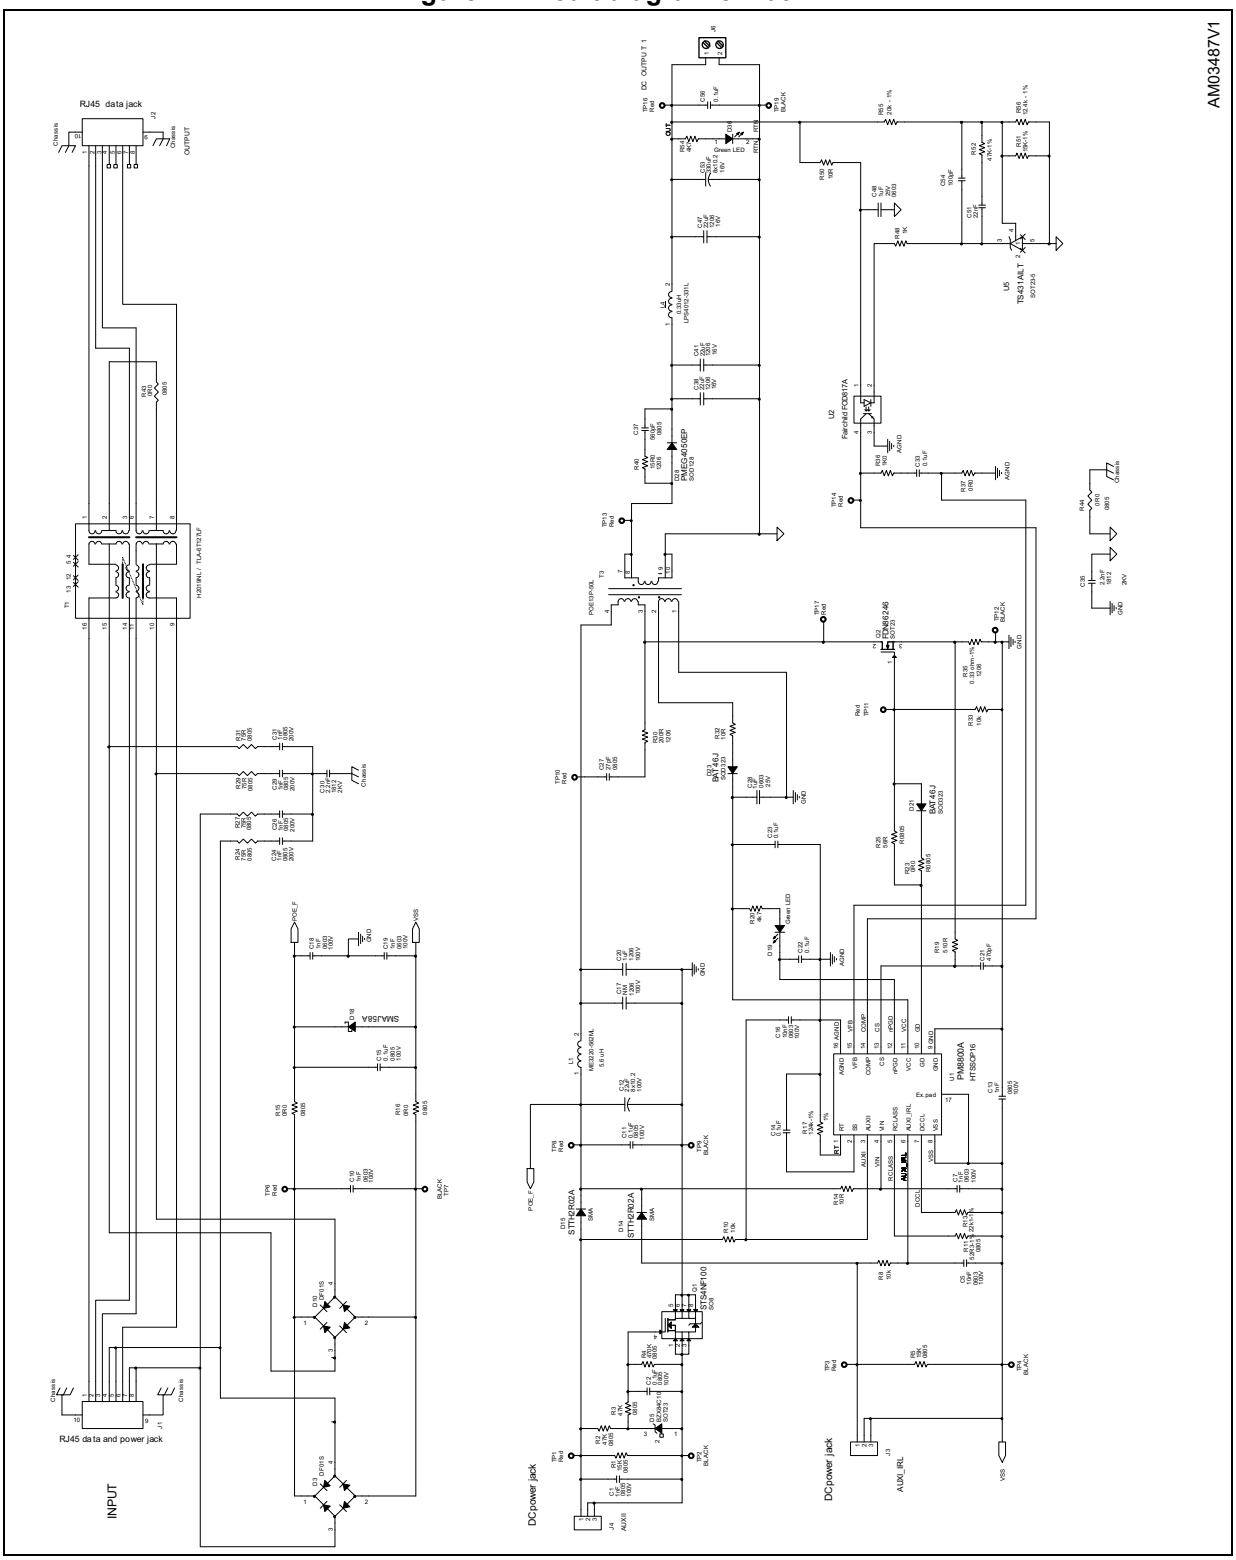


Table 3. Bill of material 5 V at 2 A

Item	Ref.	Description	Value	PCB footprint	Supplier	Voltage
1	C1	Ceramic capacitor	1 nF	C0805	Several	100 V
2	C2	Ceramic capacitor	0.1 µF	C0805	Several	100 V
3	C5	Ceramic capacitor	10 nF	C0603	Several	100 V
4	C7	Ceramic capacitor	1 nF	C0603	Several	100 V
5	C10	Ceramic capacitor	1 nF	C0805	Several	100 V
6	C11	Ceramic capacitor	0.1 µF	C0805	Several	100 V
7	C12	Elect. capacitor	22 µF	C-POL8-10	Panasonic EEEFK2A220P	100 V
8	C13	Ceramic capacitor	1 nF	C0805	Several	100 V
9	C14	Ceramic capacitor	0.1 µF	C0603	Several	50 V
10	C15	Ceramic capacitor	0.1 µF	C0805	Several	100 V
11	C16	Ceramic capacitor	10 nF	C0603	Several	100 V
12	C17	Ceramic capacitor	NM	C1206	Several	100 V
13	C18	Ceramic capacitor	1 nF	C0603	Several	100 V
14	C19	Ceramic capacitor	1 nF	C0603	Several	100 V
15	C20	Ceramic capacitor	1 µF	C1206	Several	100 V
16	C21	Ceramic capacitor	470 pF	C0603	Several	50 V
17	C22	Ceramic capacitor	0.1 µF	C0603	Several	50 V
18	C23	Ceramic capacitor	0.1 µF	C0603	Several	50 V
19	C24	Ceramic capacitor	1 nF	C0805	Several	200 V
20	C26	Ceramic capacitor	1 nF	C0805	Several	200 V
21	C27	Ceramic capacitor	27 pF	C0805	Several	50 V
22	C28	Ceramic capacitor	1 µF	C0603	TDK C1608X5R1E105K	25 V
23	C29	Ceramic capacitor	1 nF	C0805	Several	200 V
24	C30	Ceramic capacitor	2.2 nF	C1812	TDK 4532X7R3D222K	2 KV
25	C31	Ceramic capacitor	1 nF	C0805	Several	200 V
26	C33	Ceramic capacitor	0.1 µF	C0603	Several	50 V
27	C35	Ceramic capacitor	2.2 nF	C1812	TDK 4532X7R3D222K	2 KV
28	C37	Ceramic capacitor	560 pF	C0805	Several	50 V
29	C38	Ceramic capacitor	22 µF	C1206	TDK C3216X5R1E226M	16 V
30	C41	Ceramic capacitor	22 µF	C1206	TDK C3216X5R1E226M	16 V
31	C47	Ceramic capacitor	22 µF	C1206	TDK C3216X5R1E226M	16 V

Table 3. Bill of material 5 V at 2 A (continued)

Item	Ref.	Description	Value	PCB footprint	Supplier	Voltage
32	C48	Ceramic capacitor	1 µF	C0603	TDK C1608X5R1E105K	25 V
33	C51	Ceramic capacitor	22 nF	C0603	Several	50 V
34	C53	Elect. capacitor	330 µF	C-POL8-6_3	Panasonic EEEFK1C331P	16 V
35	C54	Ceramic capacitor	100 pF	C0603	Several	50 V
36	C56	Ceramic capacitor	0.1 µF	C0603	Several	50 V
37	D3	Diode bridge	DF01S	DF01S	DIODES INCORPORATED	
38	D5	Zener diode	BZX84C10	SOT23	Several	
39	D10	Diode bridge	DF01S	DF01S	DIODES	
40	D14	Diode	STTH2R02A	SMA	STMicroelectronics	
41	D15	Diode	STTH2R02A	SMA	STMicroelectronics	
42	D18	TVS diode	SMAJ58A	SMA	STMicroelectronics	
43	D19	LED diode	Green LED	LED-TLGE1100B	TOSHIBA	
44	D21	Diode	BAT46J	SOD323	STMicroelectronics	
45	D23	Diode	BAT46J	SOD323	STMicroelectronics	
46	D28	Schottky diode	PMEG4050EP	SOD128	NXP	
47	D36	LED Diode	Green LED	LED-TLGE1100B	TOSHIBA	
48	J1	Connector	RJ45 data and power jack	RJ45-8PIN	Several	
49	J2	Connector	RJ45 data jack	RJ45-8PIN	Several	
50	J3	Connector	CON3	P-JACK-RAPC722	Switchcraft	
51	J4	Connector	CON3	P-JACK-RAPC722	Switchcraft	
52	J6	Connector	MOR-10X10.5-P5-2PIN	MOR-2POLI-508	Several	
53	L1	Inductor	5.6 µH	ME3220-562ML	Coilcraft	
54	L4	Inductor	0.33 µH	DO1813H-331ML	Coilcraft	
55	Q1	MOSFET	STS4NF100	SO8	STMicroelectronics	
56	Q2	MOSFET	FDN86246	SOT23	FAIRCHILD SEMICONDUCTOR	
57	R1	Resistor	15 KΩ	R0805	Several	
58	R2	Resistor	47 KΩ	R0805	Several	
59	R3	Resistor	47 KΩ	R0805	Several	
60	R4	Resistor	470 KΩ	R0805	Several	
61	R5	Resistor	15 KΩ	R0805	Several	
62	R8	Resistor	10 kΩ	R0603	Several	

Table 3. Bill of material 5 V at 2 A (continued)

Item	Ref.	Description	Value	PCB footprint	Supplier	Voltage
63	R10	Resistor	10 kΩ	R0603	Several	
64	R11	Resistor	5.3 Ω - 1%	R0805	Several	
65	R13	Resistor	22 kΩ 1 - 1%	R0603	Several	
66	R14	Resistor	10 RΩ	R0603	Several	
67	R15	Resistor	0 Ω	R0805	Several	
68	R16	Resistor	0 Ω	R0805	Several	
69	R17	Resistor	124 kΩ - 1%	R0603	Several	
70	R19	Resistor	510 Ω	R0603	Several	
71	R20	Resistor	4.7 kΩ	R0603	Several	
72	R23	Resistor	0 Ω	R0805	Several	
73	R24	Resistor	75 Ω	R0805	Several	
74	R25	Resistor	56 Ω	R0805	Several	
75	R27	Resistor	75 Ω	R0805	Several	
76	R29	Resistor	75 Ω	R0805	Several	
77	R30	Resistor	200 Ω	R1206	Several	
78	R31	Resistor	75 Ω	R0805	Several	
79	R32	Resistor	10 Ω	R0603	Several	
80	R33	Resistor	10 kΩ	R0603	Several	
81	R35	Sense resistor	0.33 Ω - 1%	R1206	Vishay - RCWE1206R330FKE	
82	R36	Resistor	1 Ω	R0603	Several	
83	R37	Resistor	0 Ω	R0603	Several	
84	R40	Resistor	15 Ω	R1206	Several	
85	R43	Resistor	0 Ω	R0805	Several	
86	R44	Resistor	0 Ω	R1206	Several	
87	R48	Resistor	1 KΩ	R0603	Several	
88	R50	Resistor	10 Ω	R0603	Several	
89	R51	Resistor	15 KΩ - 1%	R0603	Several	
90	R52	Resistor	47 KΩ - 1%	R0603	Several	
91	R54	Resistor	4.7 KΩ	R0603	Several	
92	R55	Resistor	20 kΩ - 1%	R0603	Several	
93	R56	Resistor	12.4 kΩ - 1%	R0603	Several	
94	TP1	Test point	Red	TH-5013	KEYSTONE	
95	TP2	Test point	Black	TH-5013	KEYSTONE	
96	TP3	Test point	Red	TH-5013	KEYSTONE	

Table 3. Bill of material 5 V at 2 A (continued)

Item	Ref.	Description	Value	PCB footprint	Supplier	Voltage
97	TP4	Test point	Black	TH-5013	KEYSTONE	
98	TP6	Test point	Red	TH-5013	KEYSTONE	
99	TP7	Test point	Black	TH-5013	KEYSTONE	
100	TP8	Test point	Red	TH-5013	KEYSTONE	
101	TP9	Test point	Black	TH-5013	KEYSTONE	
102	TP10	Test point	Red	TH-5013	KEYSTONE	
103	TP11	Test point	Red	TH-5013	KEYSTONE	
104	TP12	Test point	Black	TH-5013	KEYSTONE	
105	TP13	Test point	Red	TH-5013	KEYSTONE	
106	TP14	Test point	Red	TH-5013	KEYSTONE	
107	TP16	Test point	Red	TH-5013	KEYSTONE	
108	TP17	Test point	Red	TH-5013	KEYSTONE	
109	TP19	Test point	Black	TH-5013	KEYSTONE	
110	T1	Data transfo.	H2019NL / TLA-6T127LF	Pulse-H2019	Pulse	
111	T3	Power transfo.	POE13P-50L	POE13P	Coilcraft	
112	U1	Controller IC	PM8800A	HTSSOP16	STMicroelectronics	
113	U2	Optocoupler	FOD817A	FOD817	FAIRCHILD	
114	U5	Voltage reference	TS431AILT	SOT23-5L	STMicroelectronics	

3 Measurement results

3.1 Efficiency

Figure 3. Overall and DC/DC efficiency

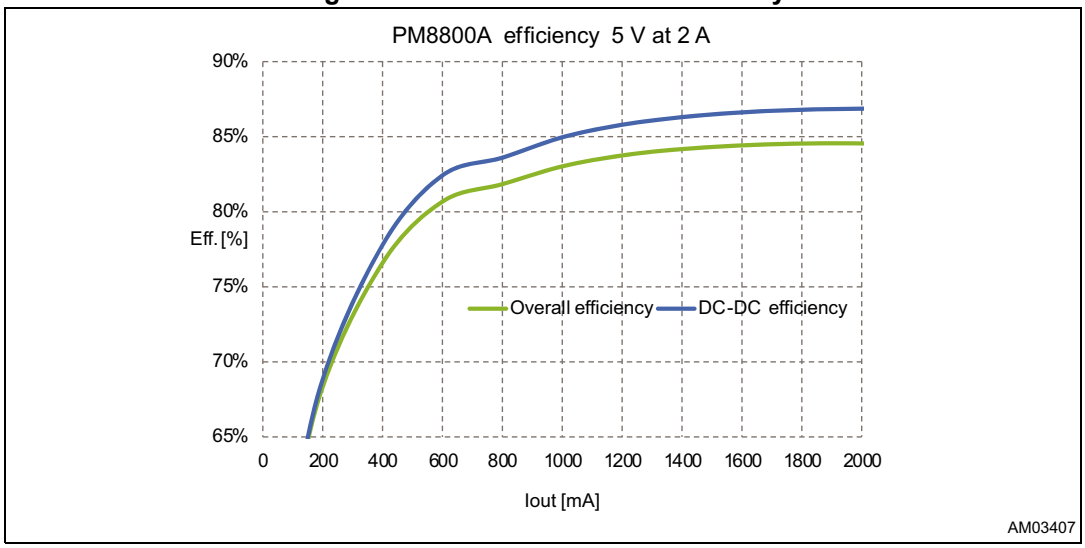


Figure 3 shows overall and DC/DC efficiencies for the converter. Overall efficiency includes all loss from the RJ45 to the 5 V output voltage rail. DC/DC efficiency is a figure of merit of the converter standalone and typically does not include the losses associated to the PoE interface section, that are: the RJ45 connector, data transformer, bridges, power consumption of the I/F of the PM8800A device.

Figure 4. Efficiency input stage


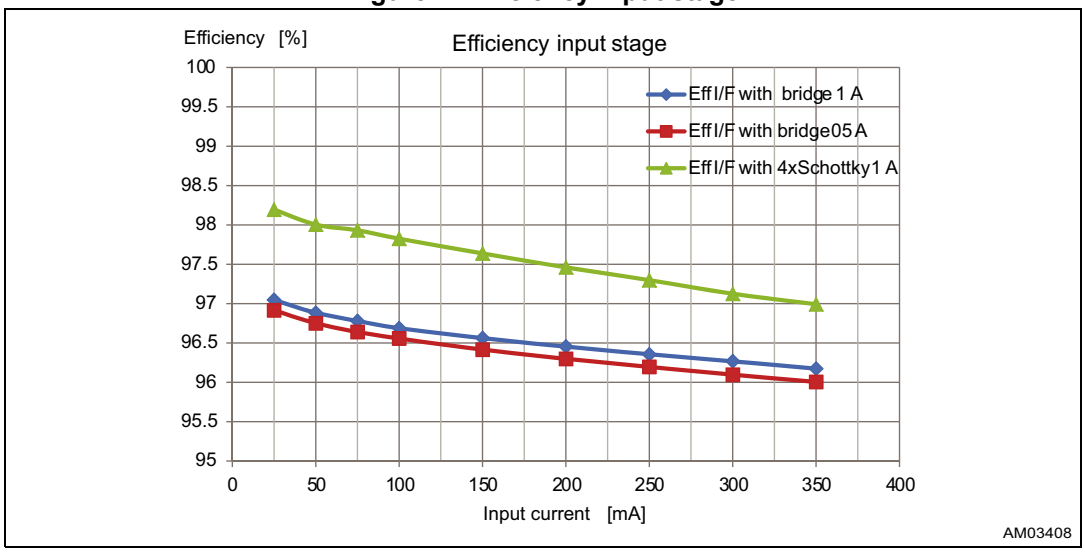


Figure 4 shows the efficiency comparison implementing on the board three different setting of bridge rectification. No relevant differences have been highlighted using a standard diode bridge (1 A or 0.5 A). The best efficiency has been captured using a bridge with four discrete 1 A Schottky diodes, reaching even a gain of about 1%.


3.2 Output voltage ripple

Figure 5. Ripple 5 V at 2 A

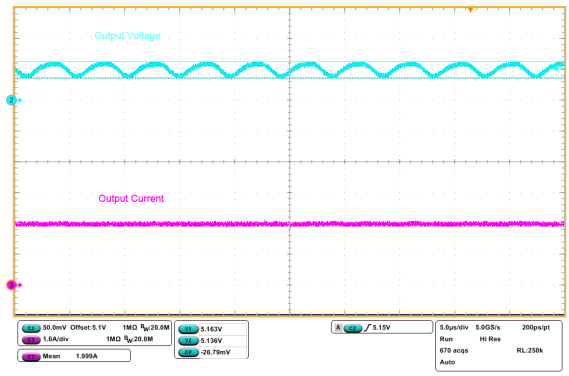

CH2: output voltage
CH3: output current


Figure 6. Ripple 5 V at 1 A

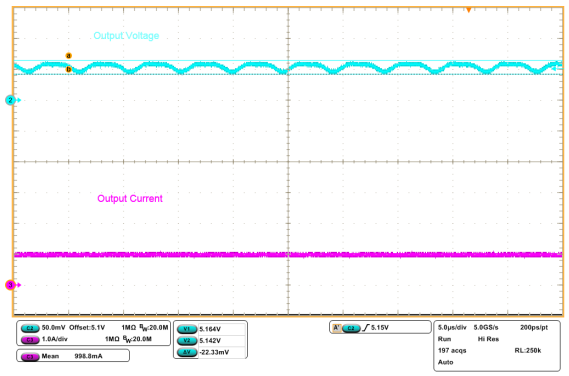

CH2: output voltage
CH3: output current


Above measurement are referred at the output voltage ripple (around 30 mV in full load condition). A ripple voltage comparison has been done replacing a 0.33 µH inductor on the L4 position with a resistor R47 = 0 Ω. The output voltage ripple, as shown in *Figure 8*, is around 110 mV in full load condition.

Figure 7. Ripple 5 V at 2 A removing L4 filter

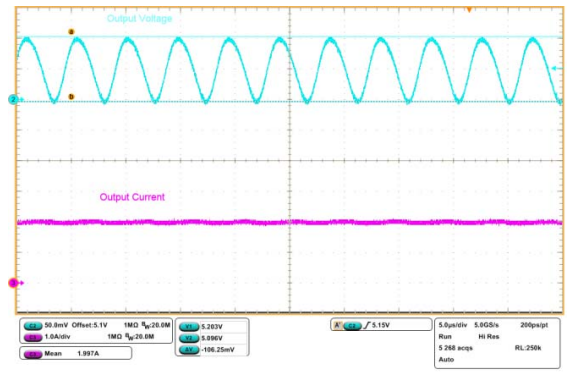

CH2: output voltage
CH3: output current


Figure 8. Ripple 5 V at 1 A removing L4 filter

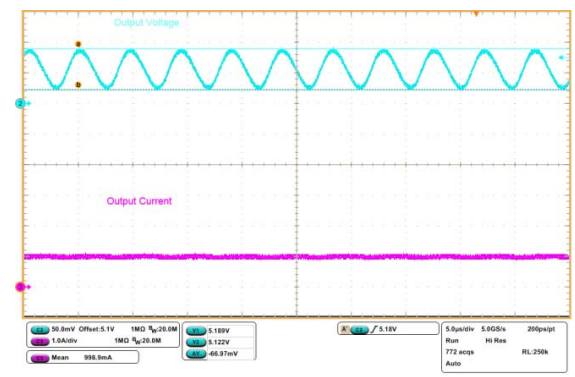

CH2: output voltage
CH3: output current


3.3 Startup

Figure 9. Startup - full load

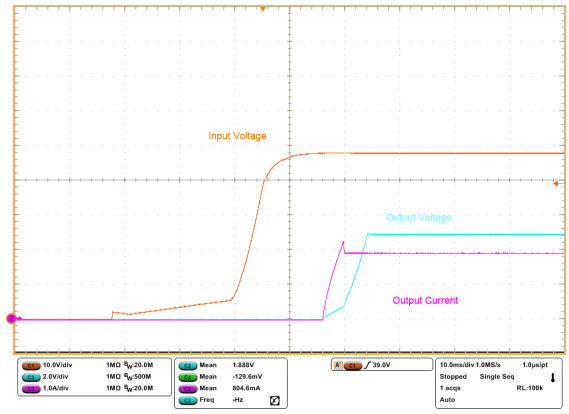


CH1: input voltage
CH2: output voltage
CH3: output current

Figure 10. Startup - full load sequencing

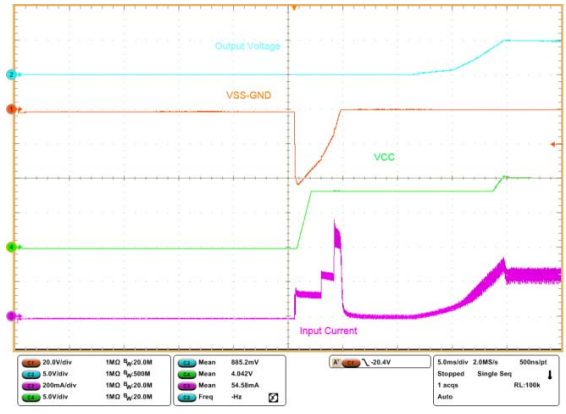


CH1: VSS - GND
CH2: output voltage
CH3: input current
CH4: VCC

Figure 11. Startup - 1 A

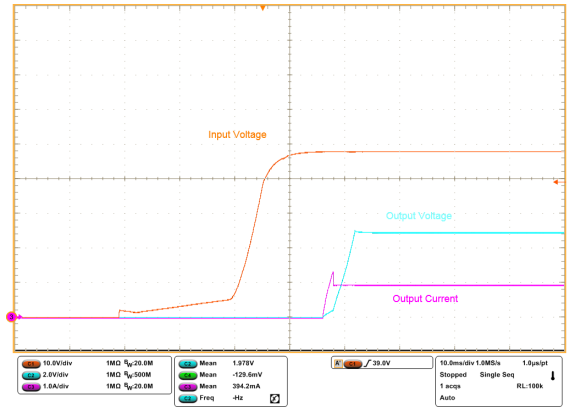

CH1: input voltage
CH2: output voltage
CH3: output current


Figure 12. Startup - no load

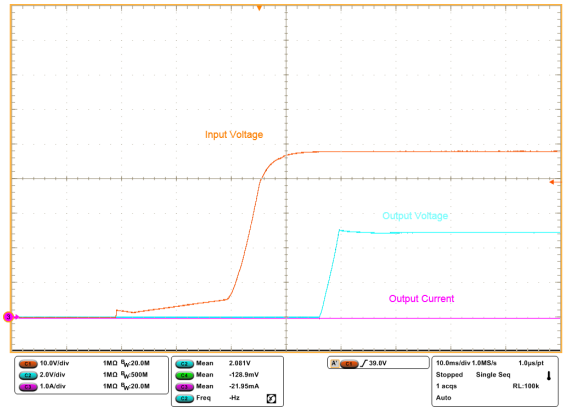

CH1: input voltage
CH2: output voltage
CH3: output current


3.4 Primary side waveforms

Figure 13. Steady state 2 A

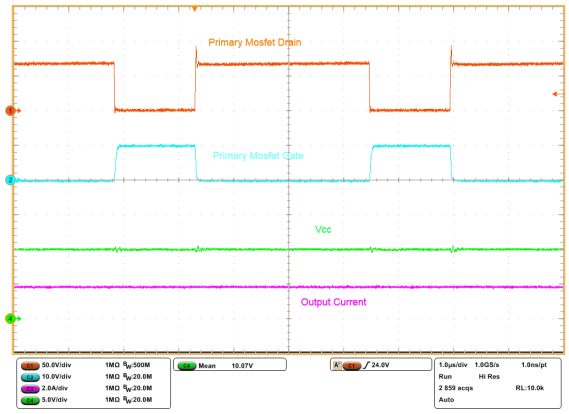


CH1: primary MOSFET drain
CH2: primary MOSFET gate
CH3: output current
CH4: VCC

Figure 14. Steady state 1 A

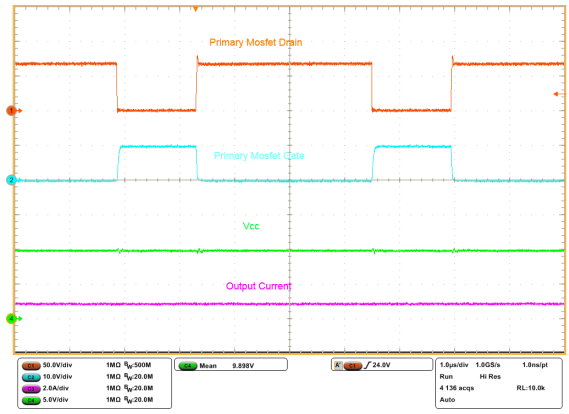


CH1: primary MOSFET drain
CH2: primary MOSFET gate
CH3: output current
CH4: VCC

Figure 15. Steady state 100 mA

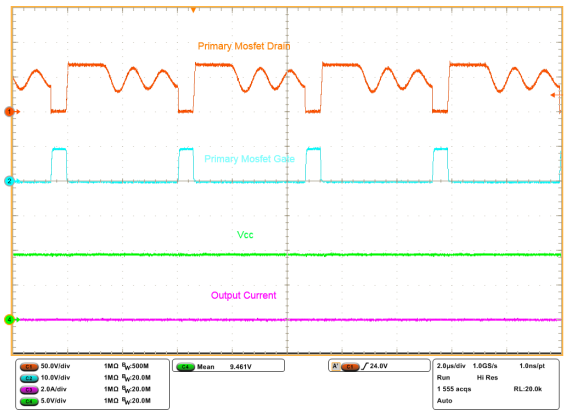

CH1: primary MOSFET drain
CH2: primary MOSFET gate
CH3: output current
CH4: VCC

Figure 16. Steady state no load

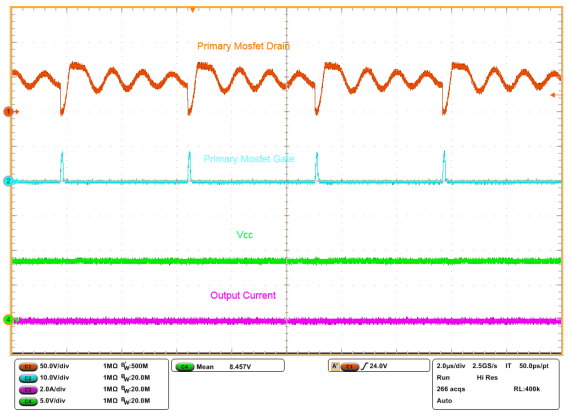

CH1: primary MOSFET drain
CH2: primary MOSFET gate
CH3: output current
CH4: VCC

3.5 Dynamic load

Figure 17. Dynamic load 2 A - 1 A



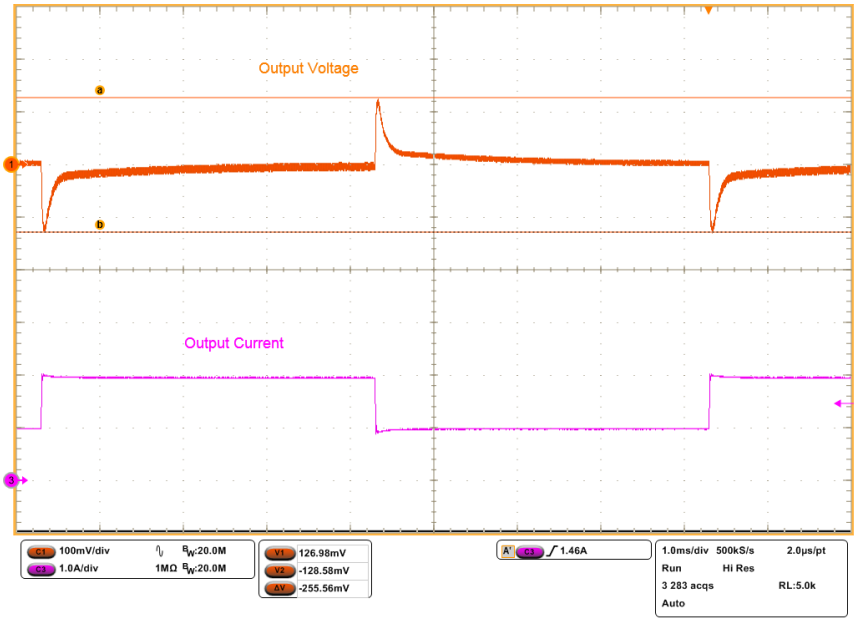


Figure 18. Dynamic load 2 A - 200 mA

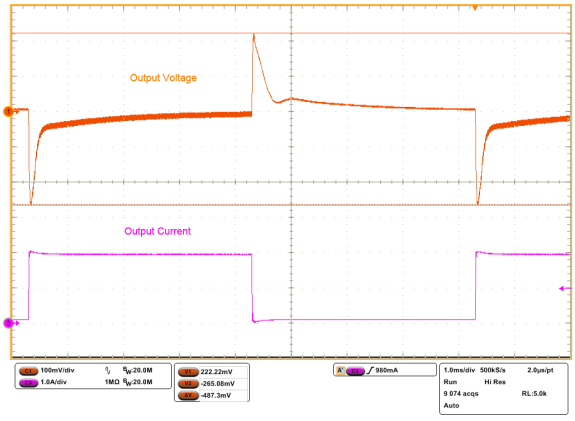

CH1: output voltage
CH3: output current


Figure 19. Dynamic load 750 mA - 250 mA

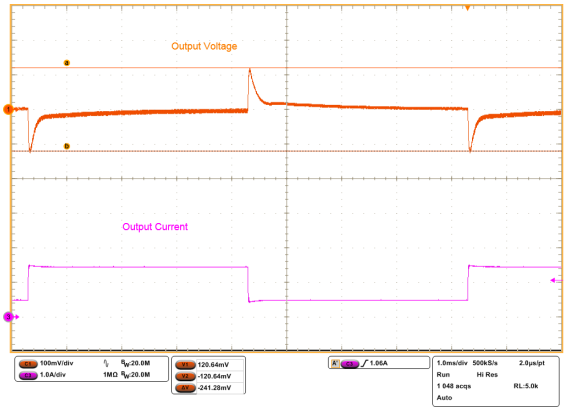

CH1: output voltage
CH3: output current


3.6 Short-circuit behavior

Figure 20. OCP detection - full load

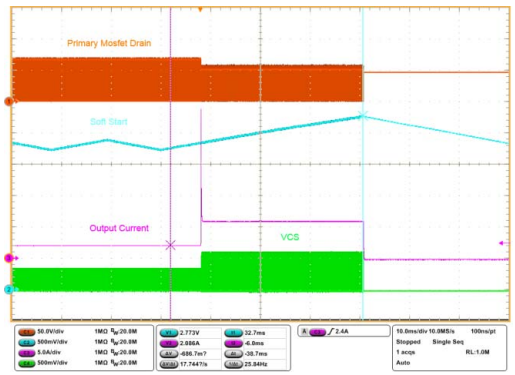


CH1: primary MOSFET drain
CH2: soft-start
CH3: output current
CH4: VCS

Figure 21. OCP detection - no load

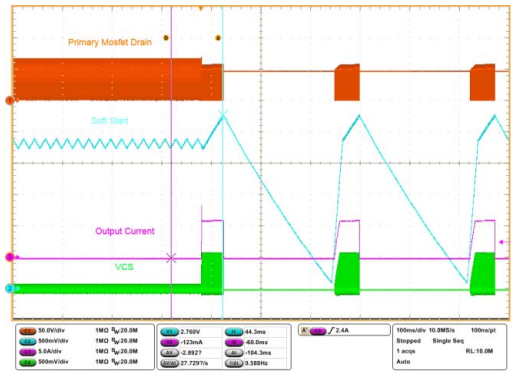


CH1: primary MOSFET drain
CH2: soft-start
CH3: output current
CH4: VCS

Figure 22. OCP steady state - full load

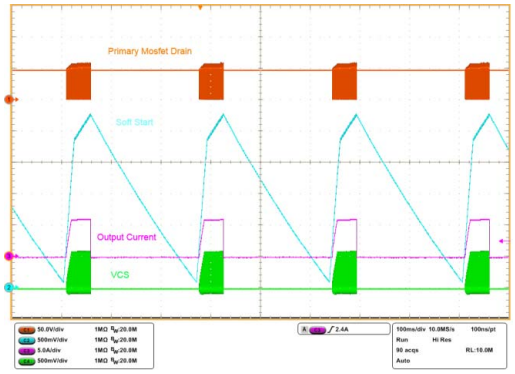


CH1: primary MOSFET drain
CH2: soft-start
CH3: output current
CH4: VCS

Figure 23. OCP steady state- no load

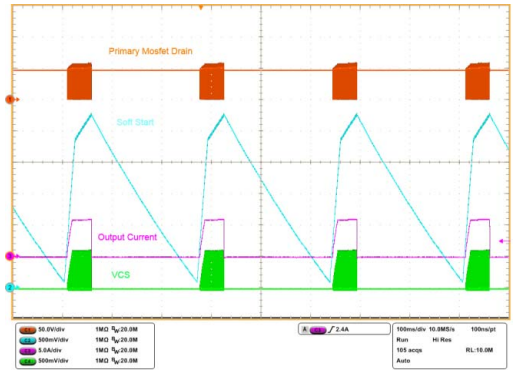


CH1: primary MOSFET drain
CH2: soft-start
CH3: output current
CH4: VCS

Figure 24. OCP removed - full load

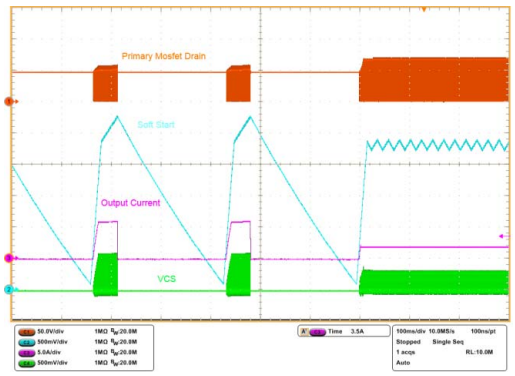

CH1: primary MOSFET drain
CH2: soft-start
CH3: output current
CH4: VCS

Figure 25. OCP removed - no load

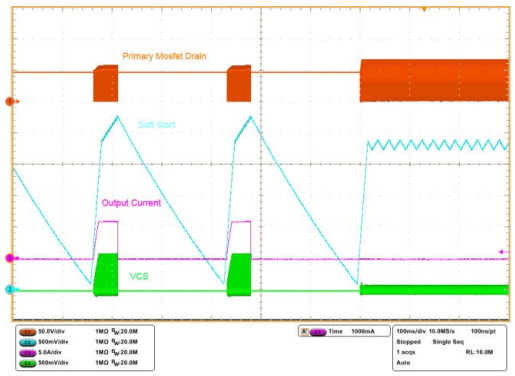

CH1: primary MOSFET drain
CH2: soft-start
CH3: output current
CH4: VCS

4 Loop compensation

Figure 26. Gain loop full load 48 V

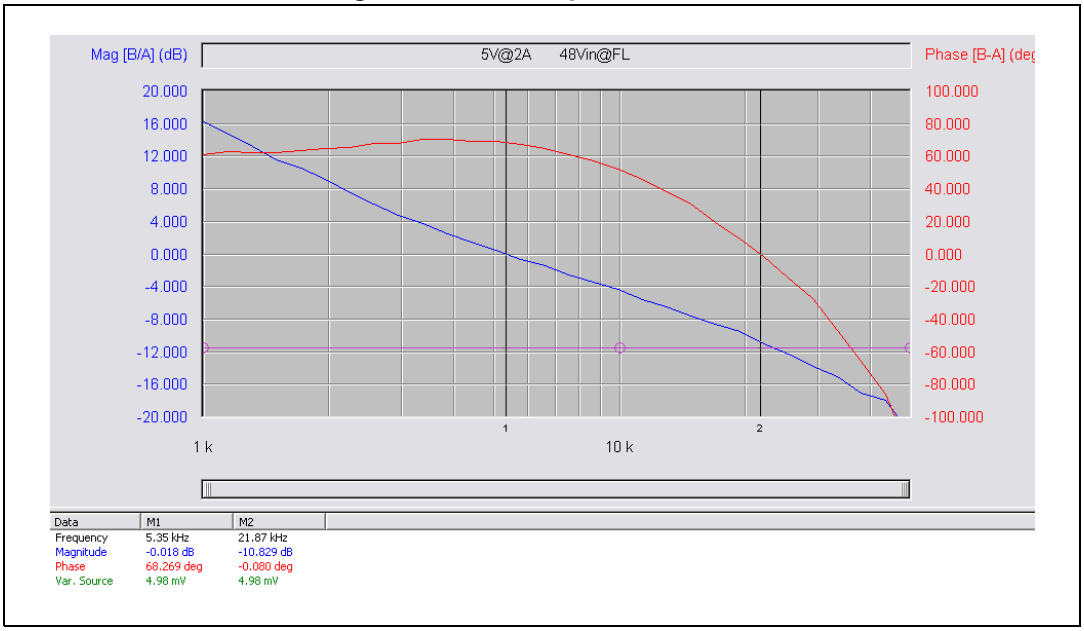


Figure 27. Gain loop half load 48 V

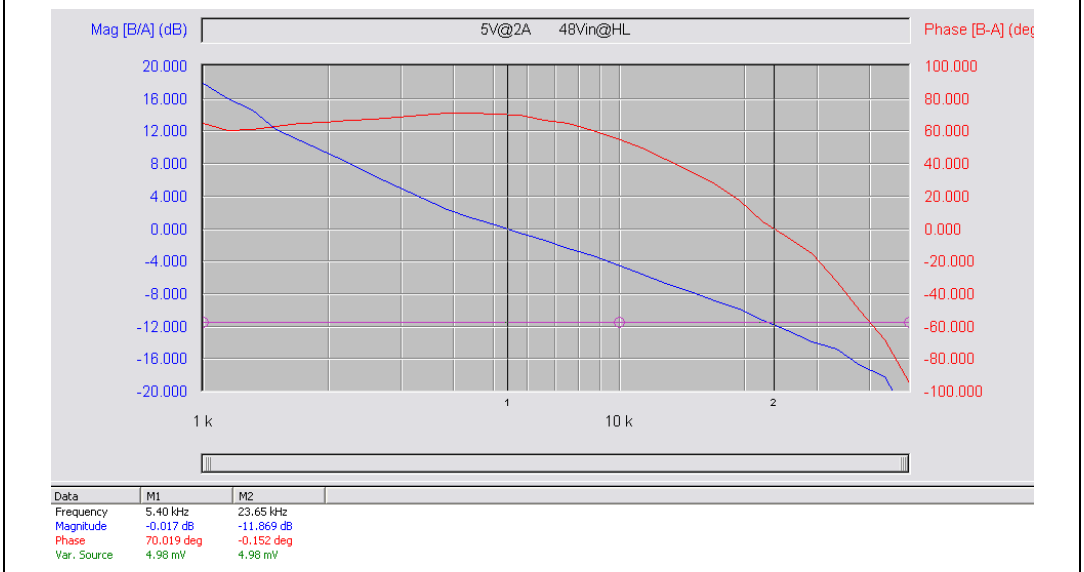


Figure 28. Gain loop full load 40 V

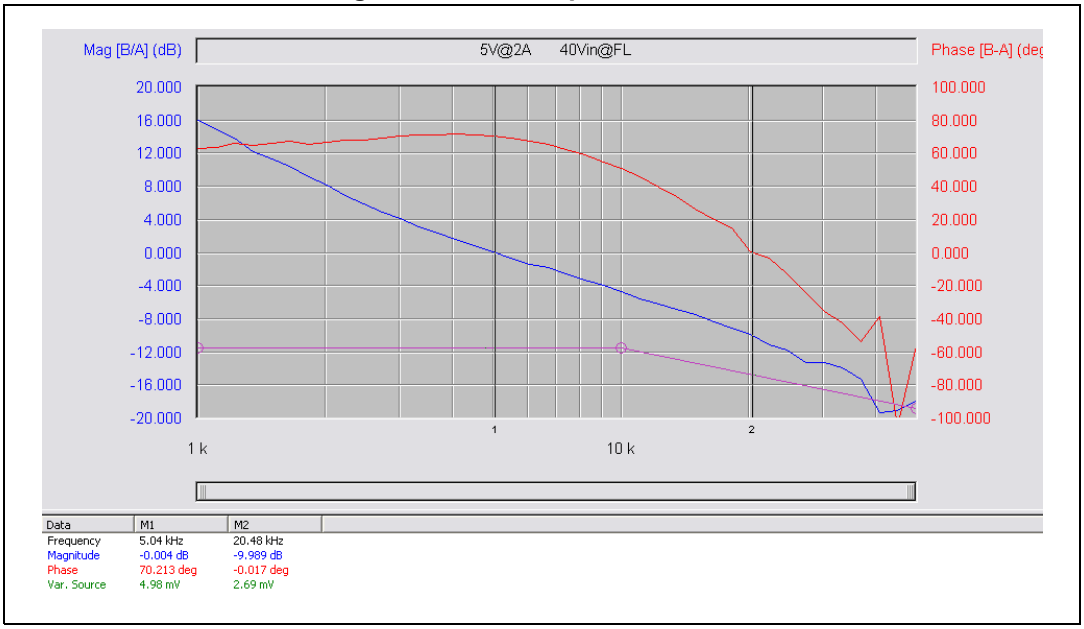


Figure 29. Gain loop full load 60 V

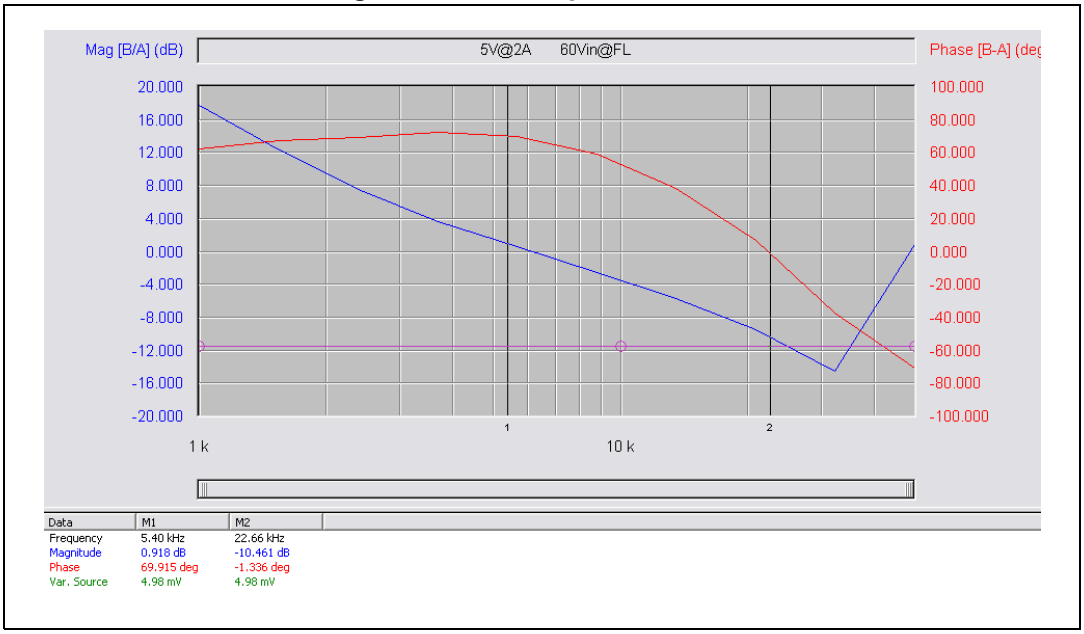


Table 4. Gain loop measurement

12 V_{OUT}	48 V 2 A	40 V 2 A	60 V 2 A	48 V 1 A
BW [kHz]	5.35	5.04	5.40	5.40
Phase margin [deg.] at 0 db	68	70	70	70
Gain margin [dB] at 0 deg.	-10	-10	-10	-12

5 Support material

Figure 30. Electrical diagram (general)

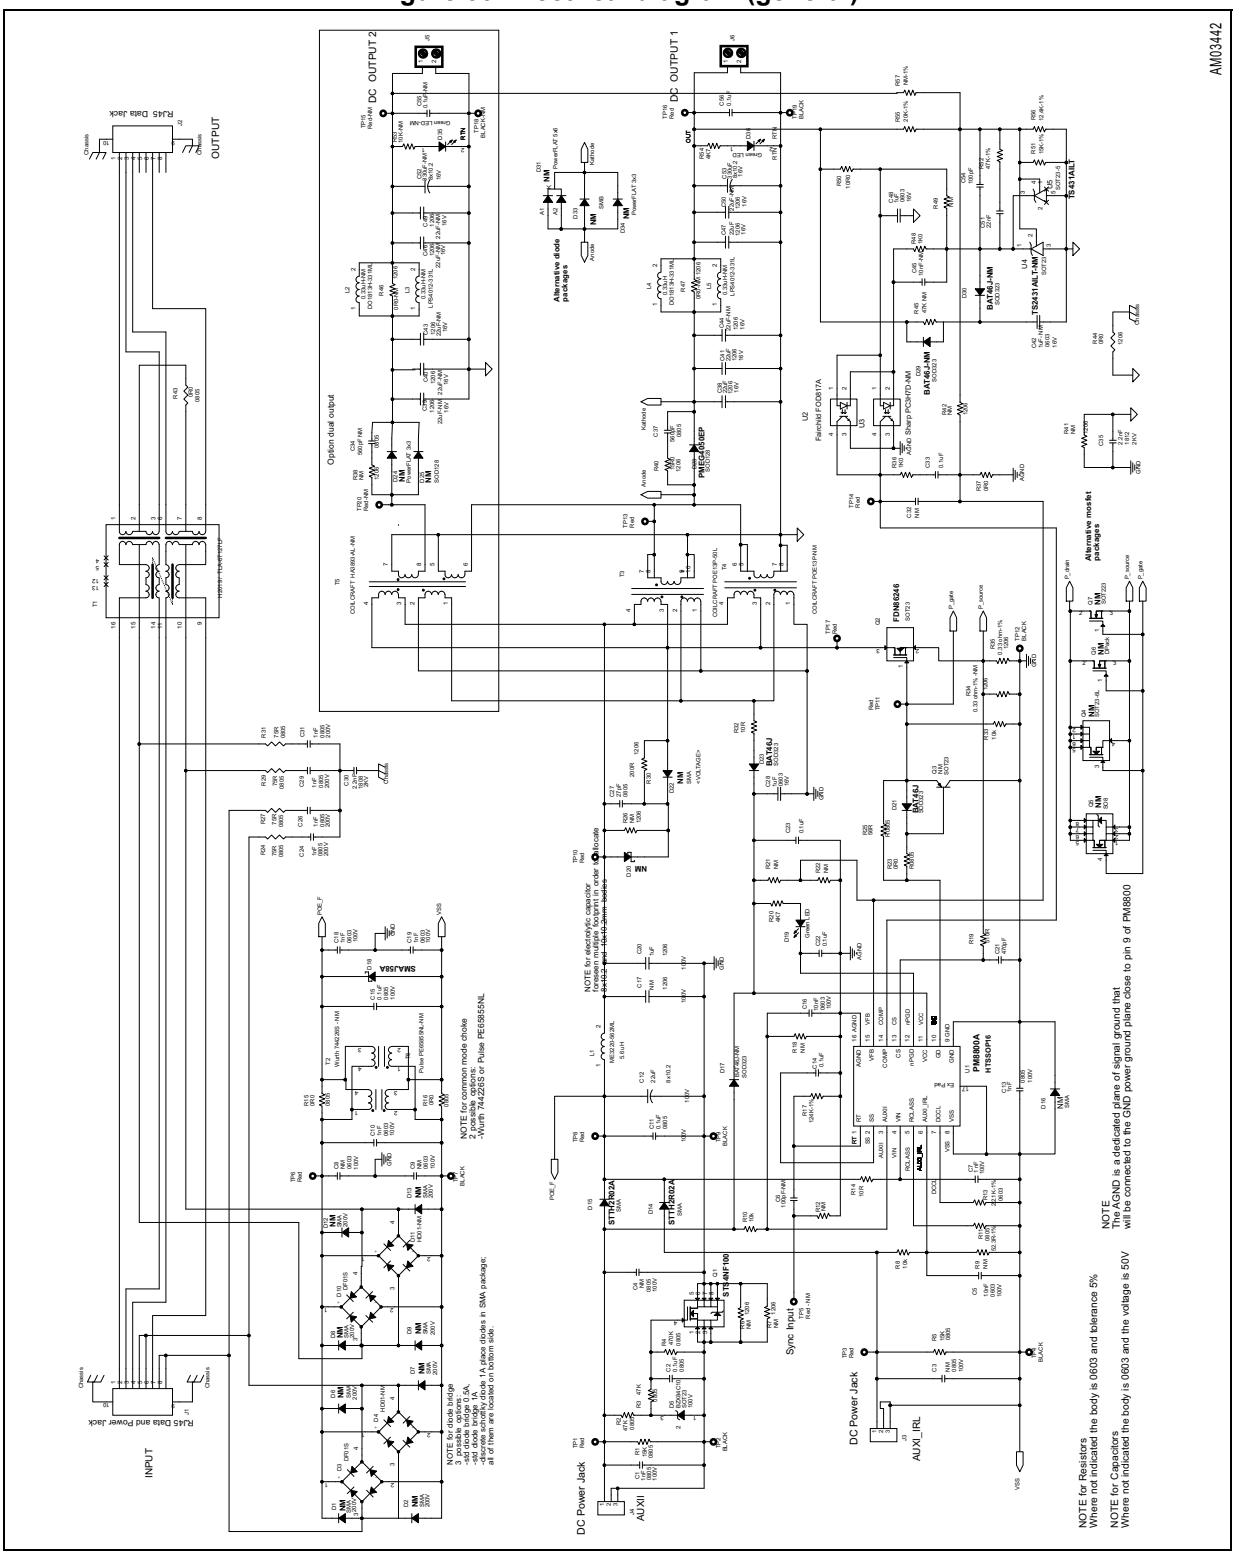


Table 5. Bill of material (general)

Item	Ref.	Description	Value	PCB footprint	Supplier	Voltage
1	C1	Ceramic capacitor	1 nF	C0805	Several	100 V
2	C2	Ceramic capacitor	0.1 µF	C0805	Several	100 V
3	C3	Ceramic capacitor	NM	C0805	Several	100 V
4	C4	Ceramic capacitor	NM	C0805	Several	100 V
5	C5	Ceramic capacitor	10 nF	C0603	Several	100 V
6	C6	Ceramic capacitor	100 pF - NM	C0603	Several	50 V
7	C7	Ceramic capacitor	1 nF	C0603	Several	100 V
8	C8	Ceramic capacitor	NM	C0603	Several	100 V
9	C9	Ceramic capacitor	NM	C0603	Several	100 V
10	C10	Ceramic capacitor	1 nF	C0805	Several	100 V
11	C11	Ceramic capacitor	0.1 µF	C0805	Several	100 V
12	C12	Electrol. capacitor	22 µF	C-POL8-10	Panasonic EEEFK2A220P	100 V
13	C13	Ceramic capacitor	1 nF	C0805	Several	100 V
14	C14	Ceramic capacitor	0.1 µF	C0603	Several	50 V
15	C15	Ceramic capacitor	0.1 µF	C0805	Several	100 V
16	C16	Ceramic capacitor	10 nF	C0603	Several	100 V
17	C17	Ceramic capacitor	1 µF- NM	C1206	Several	100 V
18	C18	Ceramic capacitor	1 nF	C0603	Several	100 V
19	C19	Ceramic capacitor	1 nF	C0603	Several	100 V
20	C20	Ceramic capacitor	1 µF	C1206	Several	100 V
21	C21	Ceramic capacitor	470 pF	C0603	Several	50 V
22	C22	Ceramic capacitor	0.1 µF	C0603	Several	50 V
23	C23	Ceramic capacitor	0.1 µF	C0603	Several	50 V
24	C24	Ceramic capacitor	1 nF	C0805	Several	200 V
25	C26	Ceramic capacitor	1 nF	C0805	Several	200 V
26	C27	Ceramic capacitor	27 pF	C0805	Several	50 V
27	C28	Ceramic capacitor	1 µF	C0603	TDK C1608X5R1E105K	16 V
28	C29	Ceramic capacitor	1 nF	C0805	Several	200 V
29	C30	Ceramic capacitor	2.2 nF	C1812	TDK 4532X7RD222K	2 KV
30	C31	Ceramic capacitor	1 nF	C0805	Several	200 V
31	C32	Ceramic capacitor	NM	C0603	Several	50 V
32	C33	Ceramic capacitor	0.1 µF	C0603	Several	50 V
33	C34	Ceramic capacitor	560 pF - NM	C0805	Several	50 V

Table 5. Bill of material (general) (continued)

Item	Ref.	Description	Value	PCB footprint	Supplier	Voltage
34	C35	Ceramic capacitor	2.2 nF	C1812	TDK 4532X7RD222K	2 KV
35	C37	Ceramic capacitor	560 pF	C0805	Several	50 V
36	C38	Ceramic capacitor	22 µF	C1206	TDK C3216X5R1E226M	16 V
37	C39	Ceramic capacitor	22 µF-NM	C1206	TDK C3216X5R1E226M	16 V
38	C40	Ceramic capacitor	22 µF-NM	C1206	TDK C3216X5R1E226M	16 V
39	C41	Ceramic capacitor	22 µF	C1206	TDK C3216X5R1E226M	16 V
40	C42	Ceramic capacitor	1 µF - NM	C0603	Several	16 V
41	C43	Ceramic capacitor	22 µF - NM	C1206	TDK C3216X5R1E226M	16 V
42	C44	Ceramic capacitor	22 µF-NM	C1206	TDK C3216X5R1E226M	16 V
43	C45	Ceramic capacitor	10 nF - NM	C0603	Several	50 V
44	C46	Ceramic capacitor	22 µF - NM	C1206	TDK C3216X5R1E226M	16 V
45	C47	Ceramic capacitor	22 µF	C1206	TDK C3216X5R1E226M	16 V
46	C48	Ceramic capacitor	1 µF	C0603	TDK C1608X5R1E105K	16 V
47	C49	Ceramic capacitor	22 µF-NM	C1206	TDK C3216X5R1E226M	16 V
48	C50	Ceramic capacitor	22 µF-NM	C1206	TDK C3216X5R1E226M	16 V
49	C51	Ceramic capacitor	22 nF	C0603	Several	50 V
50	C52	Electrol. capacitor	330 µF - NM	C-POL8-6_3	Panasonic EEEFK1C331P	16 V
51	C53	Electrol. capacitor	330 µF	C-POL8-6_3	Panasonic EEEFK1C331P	16 V
52	C54	Ceramic capacitor	100 pF	C0603	Several	50 V
53	C55	Ceramic capacitor	0.1 µF - NM	C0603	Several	50 V
54	C56	Ceramic capacitor	0.1 µF	C0603	Several	50 V
55	D1	Diode	NM	SMA	Several	
56	D2	Diode	NM	SMA	Several	
57	D3	Diode bridge	DF01S	DF01S	DIODES	
58	D4	Diode bridge	HD01-NM	HD01	DIODES	
59	D5	Zener diode	BZX84C10	SOT23	Several	

Table 5. Bill of material (general) (continued)

Item	Ref.	Description	Value	PCB footprint	Supplier	Voltage
60	D6	Diode	NM	SMA	Several	
61	D7	Diode	NM	SMA	Several	
62	D8	Diode	NM	SMA	Several	
63	D9	Diode	NM	SMA	Several	
64	D10	Diode bridge	DF01S	DF01S	DIODES	
65	D11	Diode bridge	HD01-NM	HD01	DIODES	
66	D12	Diode	NM	SMA	Several	
67	D13	Diode	NM	SMA	Several	
68	D14	Diode	STTH2R02A	SMA	STMicroelectronics	
69	D15	Diode	STTH2R02A	SMA	STMicroelectronics	
70	D16	Diode	NM	SMA	Several	
71	D17	Diode	BAT46J-NM	SOD323	STMicroelectronics	
72	D18	TVS diode	SMAJ58A	SMA	STMicroelectronics	
73	D19	LED diode	Green LED	LED-TLGE1100B	TOSHIBA	
74	D20	Diode	NM	SMA	Several	
75	D21	Diode	BAT46J	SOD323	STMicroelectronics	
76	D22	Diode	NM	SMA	Several	
77	D23	Diode	BAT46J	SOD323	STMicroelectronics	
78	D24	Diode	NM	PFLAT_3_3X3_3-2PIN		
79	D25	Diode	NM	SOD128		
80	D28	Schottky diode	PMEG6030P	SOD128	NXP	
81	D29	Diode	BAT46J - NM	SOD323	STMicroelectronics	
82	D30	Diode	BAT46J - NM	SOD323	STMicroelectronics	
83	D31	Diode	NM	PFLAT_6X5-3LEADS		
84	D33	Diode	NM	SMB		
85	D34	Diode	NM	PFLAT_3_3X3_3-2PIN		
86	D35	LED diode	Green LED - NM	LED-TLGE1100B	TOSHIBA	
87	D36	LED diode	Green LED	LED-TLGE1100B	TOSHIBA	
88	J1	Connector	RJ45 data and power jack	RJ45-8PIN	Several	
89	J2	Connector	RJ45 data jack	RJ45-8PIN	Several	
90	J3	Connector	CON3	P-JACK-RAPC722	Switchcraft	
91	J4	Connector	CON3	P-JACK-RAPC722	Switchcraft	
92	J5	Connector	MOR-10X10.5-P5-2PIN-NM	MOR-2POLI-508	Several	

Table 5. Bill of material (general) (continued)

Item	Ref.	Description	Value	PCB footprint	Supplier	Voltage
93	J6	Connector	MOR-10X10.5-P5-2PIN	MOR-2POLI-508	Several	
94	L1	Inductor	5.6 µH	ME3220	Coilcraft	
95	L2	Inductor	0.33 µH - NM	DO1813H-331ML	Coilcraft	
96	L3	Inductor	0.33 µH - NM	LPS4012-331L	Coilcraft	
97	L4	Inductor	0.33 µH	DO1813H-331ML	Coilcraft	
98	L5	Inductor	0.33 µH - NM	LPS4012-331L	Coilcraft	
99	Q1	MOSFET	STS4NF100	SO8	STMicroelectronics	
100	Q2	MOSFET	FDN86246	SOT23	FAIRCHILD	
101	Q3	Transistor	NM	SOT23	Several	
102	Q4	MOSFET	NM	SOT23-6L		
103	Q5	MOSFET	NM	Si4848		
104	Q6	MOSFET	NM	DPAK		
105	Q7	MOSFET	NM	SOT-223		
106	R1	Resistor	15 KΩ	R0805	Several	
107	R2	Resistor	47 KΩ	R0805	Several	
108	R3	Resistor	47 KΩ	R0805	Several	
109	R4	Resistor	470 KΩ	R0805	Several	
110	R5	Resistor	15 KΩ	R0805	Several	
111	R6	Resistor	NM	R1206	Several	
112	R7	Resistor	NM	R1206	Several	
113	R8	Resistor	10 kΩ	R0603	Several	
114	R9	Resistor	NM	R0603	Several	
115	R10	Resistor	10 kΩ	R0603	Several	
116	R11	Resistor	52.3 Ω - 1%	R0805	Several	
117	R12	Resistor	NM	R0603	Several	
118	R13	Resistor	22.1 KΩ - 1%	R0603	Several	
119	R14	Resistor	10 Ω	R0603	Several	
120	R15	Resistor	0 Ω	R0805	Several	
121	R16	Resistor	0 Ω	R0805	Several	
122	R17	Resistor	124 KΩ - 1%	R0603	Several	
123	R18	Resistor	NM	R0603	Several	
124	R19	Resistor	510 Ω	R0603	Several	
125	R20	Resistor	4.7 KΩ	R0603	Several	
126	R21	Resistor	NM	R0603	Several	

Table 5. Bill of material (general) (continued)

Item	Ref.	Description	Value	PCB footprint	Supplier	Voltage
127	R22	Resistor	NM	R0603	Several	
128	R23	Resistor	0 Ω	R0805	Several	
129	R24	Resistor	75 Ω	R0805	Several	
130	R25	Resistor	56 Ω	R0805	Several	
131	R26	Resistor	NM	R1206	Several	
132	R27	Resistor	75 Ω	R0805	Several	
133	R29	Resistor	75 Ω	R0805	Several	
134	R30	Resistor	100 Ω - NM	R1206	Several	
135	R31	Resistor	75 Ω	R0805	Several	
136	R32	Resistor	10 Ω	R0603	Several	
137	R33	Resistor	10 kΩ	R0603	Several	
138	R34	Sense resistor	0.33 Ω - 1% - NM	R1206	Vishay - RCWE1206R330FKE	
139	R35	Sense resistor	0.33 Ω - 1%	R1206	Vishay - RCWE1206R330FKE	
140	R36	Resistor	1 KΩ	R0603	Several	
141	R37	Resistor	0 Ω	R0603	Several	
142	R38	Resistor	NM	R1206	Several	
143	R40	Resistor	15 Ω	R1206	Several	
144	R41	Resistor	NM	R1206	Several	
145	R42	Resistor	NM	R1206	Several	
146	R43	Resistor	0 Ω	R0805	Several	
147	R44	Resistor	0 Ω	R1206	Several	
148	R45	Resistor	47 KΩ NM	R0603	Several	
149	R46	Resistor	0Ω - NM	R1206	Several	
150	R47	Resistor	0 Ω - NM	R1206	Several	
151	R48	Resistor	1 KΩ	R0603	Several	
152	R49	Resistor	NM	R0603	Several	
153	R50	Resistor	10 Ω	R0603	Several	
154	R51	Resistor	15 KΩ - 1%	R0603	Several	
155	R52	Resistor	47 KΩ - 1%	R0603	Several	
156	R53	Resistor	10 KΩ - NM	R0603	Several	
157	R54	Resistor	4.7 KΩ	R0603	Several	
158	R55	Resistor	20 KΩ - 1%	R0603	Several	
159	R56	Resistor	12.4 KΩ - 1%	R0603	Several	

Table 5. Bill of material (general) (continued)

Item	Ref.	Description	Value	PCB footprint	Supplier	Voltage
160	R57	Resistor	NM - 1%	R0603	Several	
161	T1	Data transfo.	H2019 / TLA-6T127LF	Pulse-H2019	Pulse	
162	T2	CM choke	Würth 744226S - NM	744226S	Würth	
163	T3	Power transfo.	COILCRAFT POE13P-50L	POE13P	Coilcraft	
164	T4	Power transfo.	COILCRAFT POE70P -50L-NM	POE70P	Coilcraft	
165	T5	Power transfo.	COILCRAFT HA3893-AL-NM	HA3893-AL-COILCRAFT	Coilcraft	
166	T6	CM Choke	Pulse PE65855NL-NM	PE-65855NL-PULSE	Pulse	
167	TP1	Test point	Red	TH-5013	KEYSTONE	
168	TP2	Test point	Black	TH-5013	KEYSTONE	
169	TP3	Test point	Red	TH-5013	KEYSTONE	
170	TP4	Test point	Black	TH-5013	KEYSTONE	
171	TP5	Test point	Red - NM	TH-5013	KEYSTONE	
172	TP6	Test point	Red	TH-5013	KEYSTONE	
173	TP7	Test point	Black	TH-5013	KEYSTONE	
174	TP8	Test point	Red	TH-5013	KEYSTONE	
175	TP9	Test point	Black	TH-5013	KEYSTONE	
176	TP10	Test point	Red	TH-5013	KEYSTONE	
177	TP11	Test point	Red	TH-5013	KEYSTONE	
178	TP12	Test point	Black	TH-5013	KEYSTONE	
179	TP13	Test point	Red	TH-5013	KEYSTONE	
180	TP14	Test point	Red	TH-5013	KEYSTONE	
181	TP15	Test point	Red - NM	TH-5013	KEYSTONE	
182	TP16	Test point	Red	TH-5013	KEYSTONE	
183	TP17	Test point	Red	TH-5013	KEYSTONE	
184	TP18	Test point	Black - NM	TH-5013	KEYSTONE	
185	TP19	Test point	Black	TH-5013	KEYSTONE	
186	TP20	Test point	Red-NM	TH-5013	KEYSTONE	
187	U1	Controller IC	PM8800A	HTSSOP16	STMicroelectronics	
188	U2	Optocoupler	FAIRCHILD FOD817A	FOD817	FAIRCHILD	
189	U3	Optocoupler	SHARP PC3H7D-NM	PC3H7	SHARP	
190	U4	Voltage reference	TS2431AILT-NM	SOT23	STMicroelectronics	
191	U5	Voltage reference	TS431AILT	SOT23-5L	STMicroelectronics	

6 PCB layers

Figure 31. PCB layer: top view

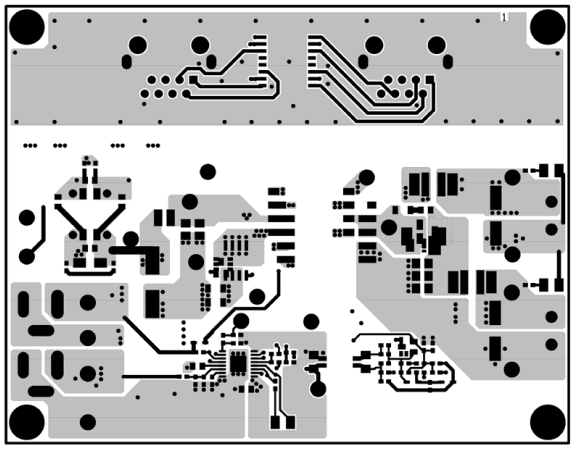


Figure 32. PCB layer: layer 2

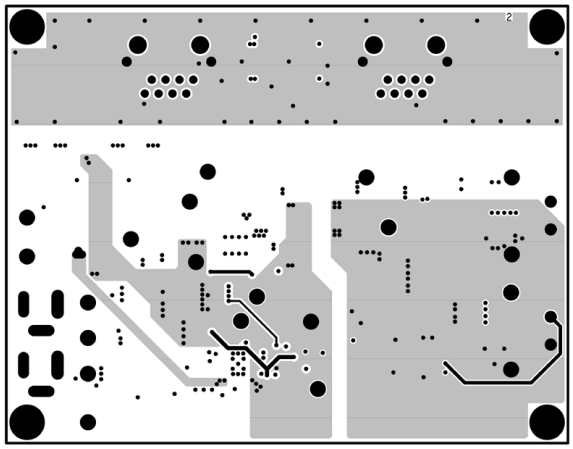


Figure 33. PCB layer: layer 3

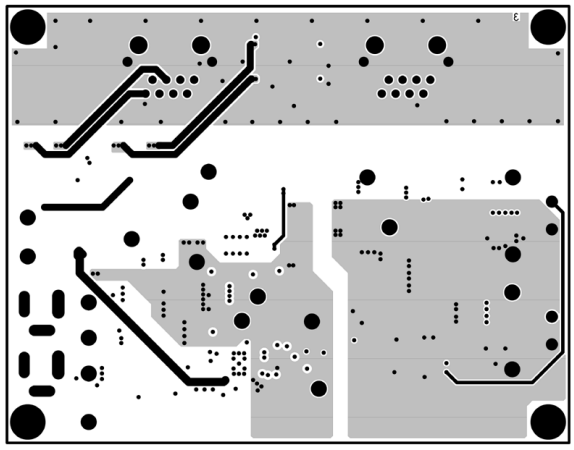


Figure 34. PCB layer: bottom view

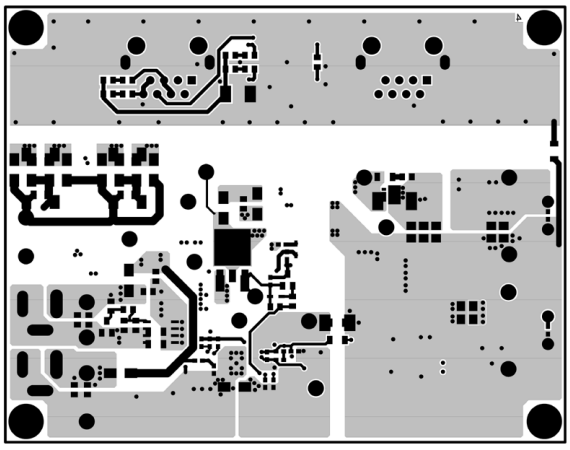


Figure 35. PCB Layer: components on top side


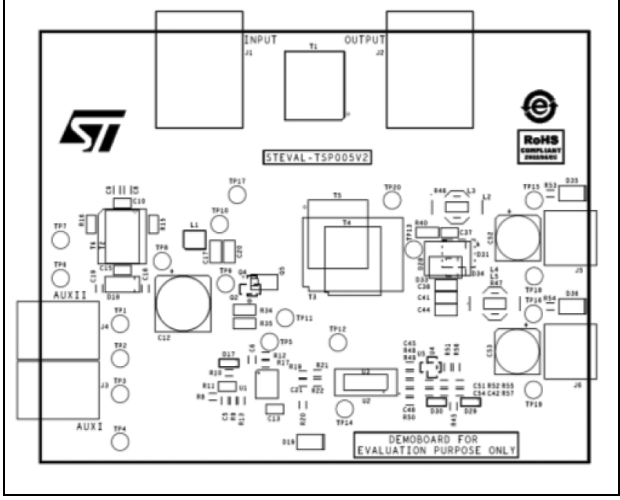


Figure 36. PCB Layer: components on bottom side

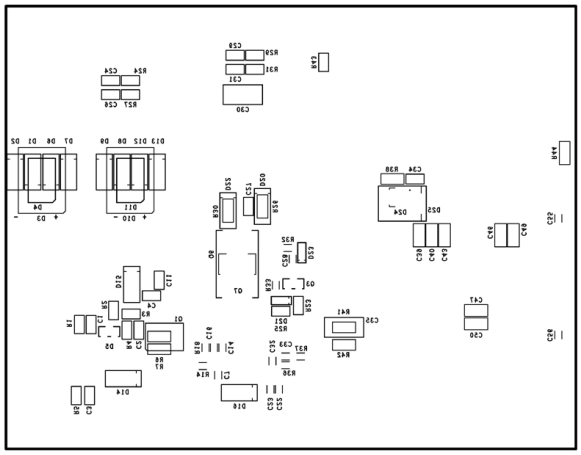

7 Revision history

Table 6. Document revision history

Date	Revision	Changes
30-May-2014	1	Initial release.

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST’s terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST’S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

ST PRODUCTS ARE NOT DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE ST PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER’S SOLE RISK, EVEN IF ST HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY ST AS BEING INTENDED FOR “AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL” INDUSTRY DOMAINS ACCORDING TO ST PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.
Information in this document supersedes and replaces all information previously supplied.
The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2014 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com