Ordering number: EN 2277A

Monolithic Linear IC

SANYO No.2277A

LA3607

7-Band Graphic Equalizer

Features

- 7-band graphic equalizer for one channel can be formed easily by externally connecting capacitors and variable resistors which fix fo (resonance frequency).
- Series connection of the LA3607 makes multiband available.
- Boost, cut amount can be varied by external resistors.
- Highly stable to capacitive load

Maximum Ratings at Ta=25°C

				unit
Maximum Supply Voltage	V_{CC}max		20	V
Allowable Power Dissipation	Pdmax	LA3607	300	mW
Operating Temperature	Topr		-20 to +75	°C
Storage Temperature	Tstg		-40 to +125	°C

Operating Conditions at Ta=25°C

			unit
Recommended Supply Voltage	V_{CC}	8	V
Operating Voltage Range	V_{CC}op	5 to 15	V

Operating Characteristics at Ta=25°C, V_{CC}=8V, R_L=10kohms, Rg=600ohms, See specified Test Circuit.

			min	typ	max	unit
Quiescent Current	Icco	Quiescent		7	9	mA
Voltage Gain	VG	f=1kHz, V_{IN}=-10dB at all flat mode	-3.8	-0.8	2.2	dB
Boost Amount	BOOST	f=60Hz (Vo=-10dB is taken as 0dB at all flat mode at f=1kHz.)	10	12	14	dB
		f=150Hz	10	12	14	dB
		f=400Hz	10	12	14	dB
		f=1kHz	10	12	14	dB
		f=2.5kHz	10	12	14	dB
		f=6kHz	10	12	14	dB
		f=15kHz	10	12	14	dB

Continued on next page.

Package Dimensions
(unit: mm)
3021B

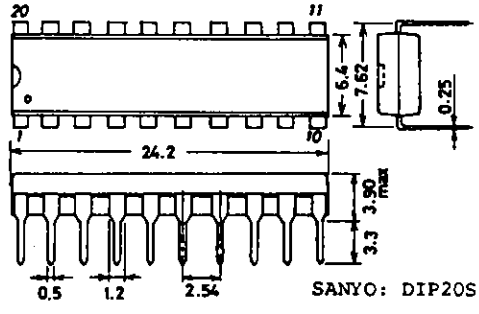

Continued from preceding page.

				min	typ	max	unit
Cut Amount	CUT	f=60Hz	Vo=-10dB is taken as 0dB at all flat mode at f=1kHz.	-14	-12	-10	dB
		f=150Hz		-14	-12	-10	dB
		f=400Hz		-14	-12	-10	dB
		f=1kHz		-14	-12	-10	dB
		f=2.5kHz		-14	-12	-10	dB
		f=6kHz		-14	-12	-10	dB
		f=15kHz		-14	-12	-10	dB
Total Harmonic Distortion	THD	f=1kHz,Vo=1.0V at all flat mode input			0.02	0.1	%
Output Noise Voltage	V_{NO}	All flat,input short, B.P.F.,10Hz to 30kHz			7	40	μV

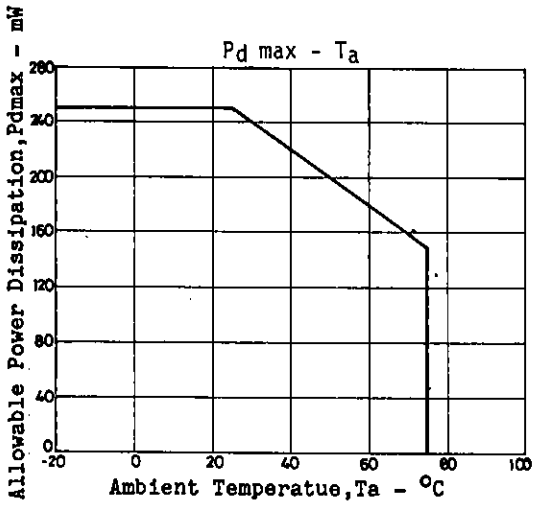

Test Method: V_{CC}=8V, R_L=10kohms, Rg=600ohms

Item	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	SW9	SW10	Conditions
Icco	1	F	F	F	F	F	F	F	2	1	
VG	2	F	F	F	F	F	F	F	1	1	f=1kHz VIN=-10dB
BOOST1	2	B	F	F	F	F	F	F	1	1	f=60Hz
BOOST2	2	F	B	F	F	F	F	F	1	1	f=150Hz
BOOST3	2	F	F	B	F	F	F	F	1	1	f=400Hz
BOOST4	2	F	F	F	B	F	F	F	1	1	f=1kHz
BOOST5	2	F	F	F	F	B	F	F	1	1	f=2.5kHz
BOOST6	2	F	F	F	F	F	B	F	1	1	f=6kHz
BOOST7	2	F	F	F	F	F	F	B	1	1	f=15kHz
CUT1	2	C	F	F	F	F	F	F	1	1	f=60Hz
CUT2	2	F	C	F	F	F	F	F	1	1	f=150Hz
CUT3	2	F	F	C	F	F	F	F	1	1	f=400Hz
CUT4	2	F	F	F	C	F	F	F	1	1	f=1kHz
CUT5	2	F	F	F	F	C	F	F	1	1	f=2.5kHz
CUT6	2	F	F	F	F	F	C	F	1	1	f=6kHz
CUT7	2	F	F	F	F	F	F	C	1	1	f=15kHz
THD	2	F	F	F	F	F	F	F	1	1	f=1kHz, Vo=1.0V
VNO	2	F	F	F	F	F	F	F	2	2	

Test Circuit

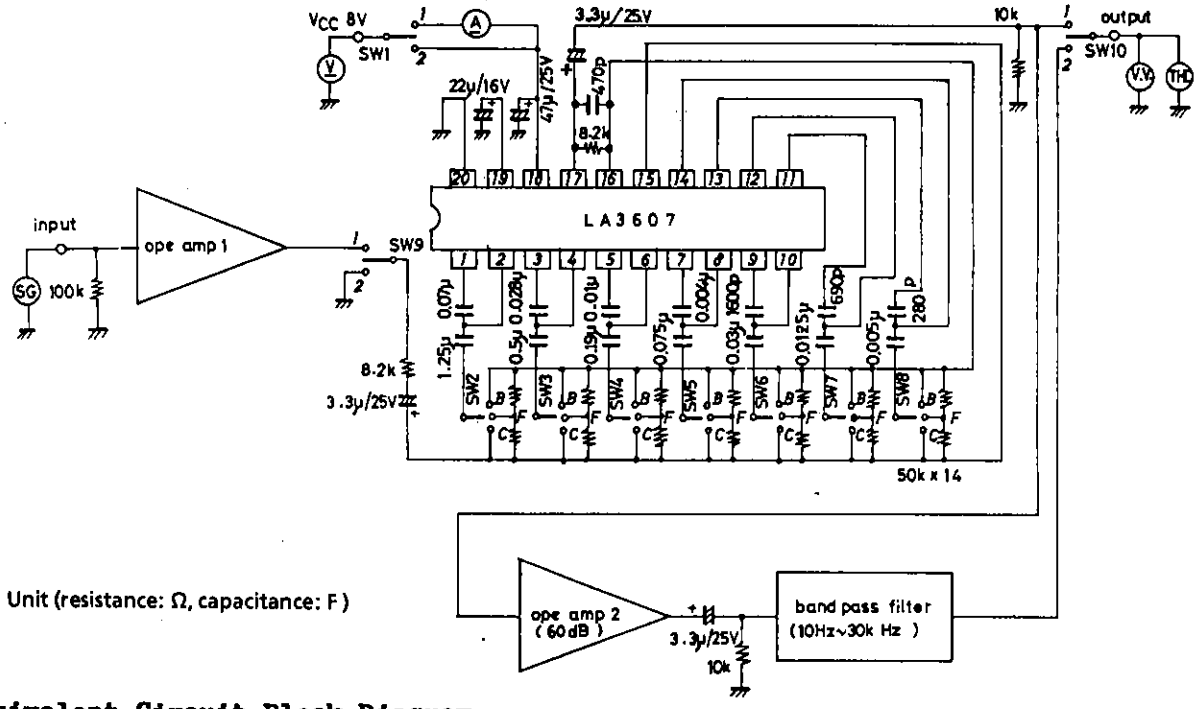

Unit (resistance: Ω, capacitance: F)

Equivalent Circuit Block Diagram

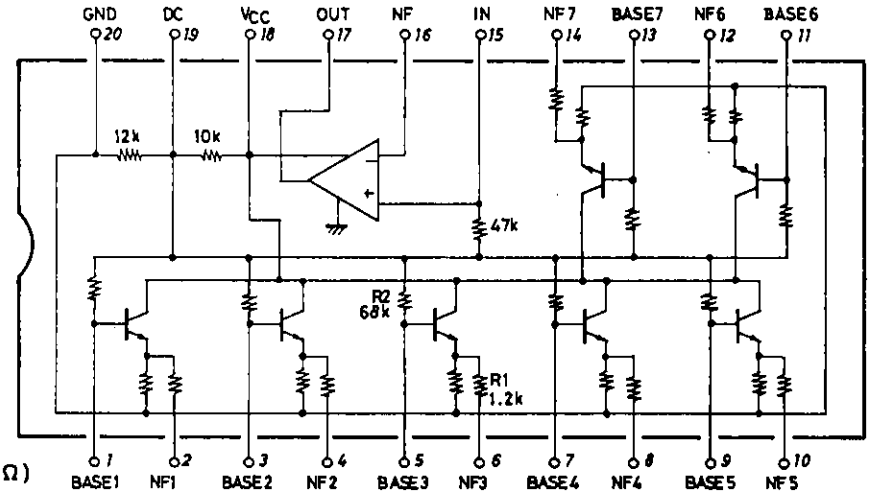

Unit (resistance: Ω)

Sample Application Circuit

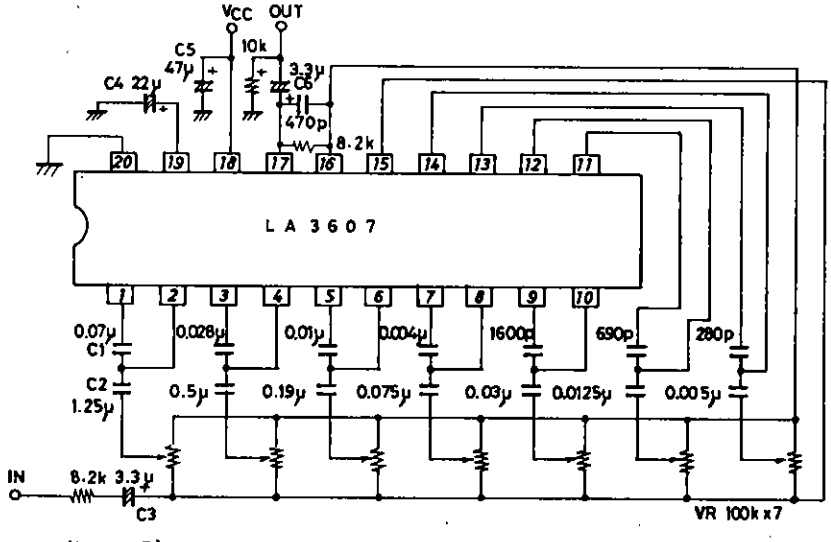

Unit (resistance: Ω, capacitance: F)

Sample Printed Circuit Pattern (Cu-foiled side)

Unit (resistance: Ω, capacitance: F)

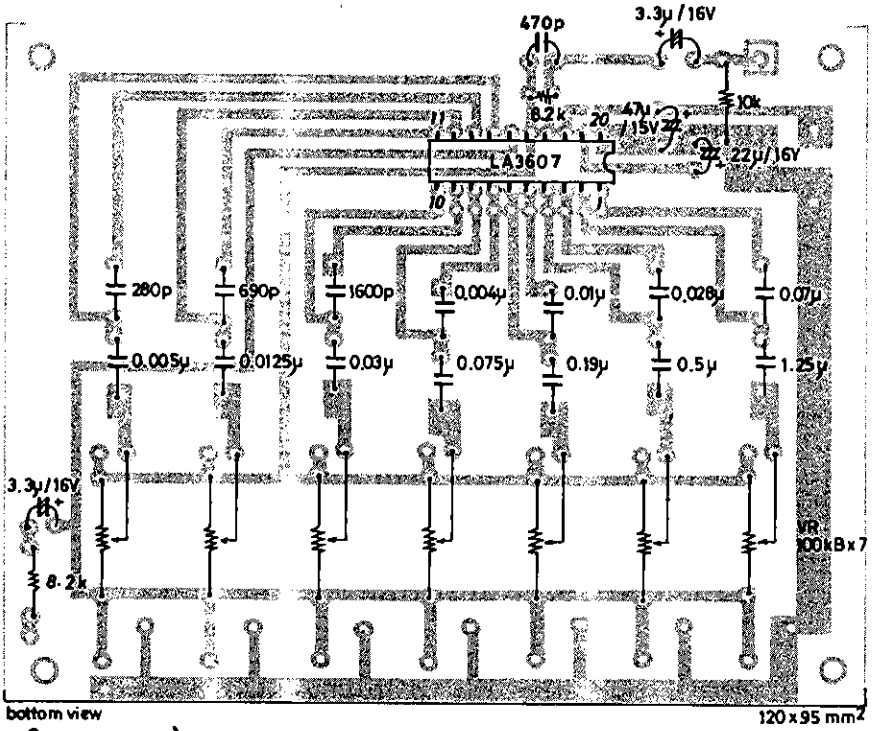

fo(resonance frequency)

In the sample application circuit, fo for each of 7 bands is set as follows:
fo=60Hz, 150Hz, 400Hz, 1kHz, 2.5kHz, 6kHz, 15kHz
fo is calculated using the following formula.

$$f_o = \frac{1}{2\pi\sqrt{C1 \cdot C2 \cdot R1 \cdot R2}}$$

Q (quality factor)

Q is calculated using the following formula.

$$Q = \sqrt{\frac{C1 \cdot R2}{C2 \cdot R1}}$$

When Q is increased, the frequency band affected by the resonance circuit is narrowed and a clear distinction between this band and adjacent band is provided, but the frequency response swells greatly at all boost mode and the peak of the composite frequency is lowered. The above must be considered to fix C1, C2.

Description of external parts

- C1, C2 : Capacitors used to fix fo (resonance frequency)
- C3 : Input capacitor. Decreasing the capacitor value lowers the frequency response at low frequencies.
- C4 : Decoupling capacitor. Decreasing the capacitor value makes the effect of power supply stronger, whereby ripple is liable to occur.
- C5 : Power capacitor
- C6 : Output capacitor. Decreasing the capacitor value lowers the frequency response at low frequencies.

Proper cares in using IC

- Maximum supply voltage V_{CC}max 20V must not be exceeded. The operating voltage is in the range of 5 to 15V.
- Application of power with the pin-to-pin spaces shorted causes breakdown or deterioration of the IC to occur. When mounting the IC on the board or applying power, make sure that the pin-to-pin spaces are not shorted with solder, etc.

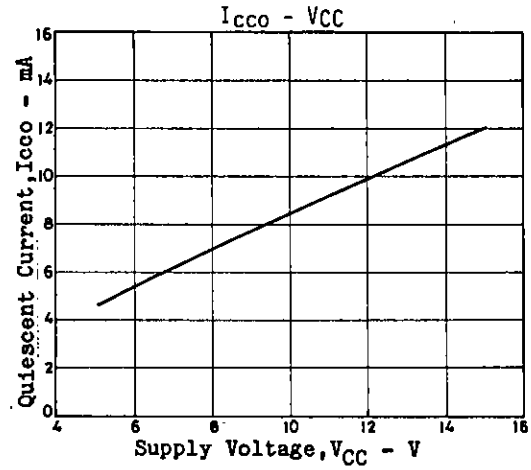
Icco - VCC
Quiescent Current,Icco - mA
Supply Voltage,VCC - V

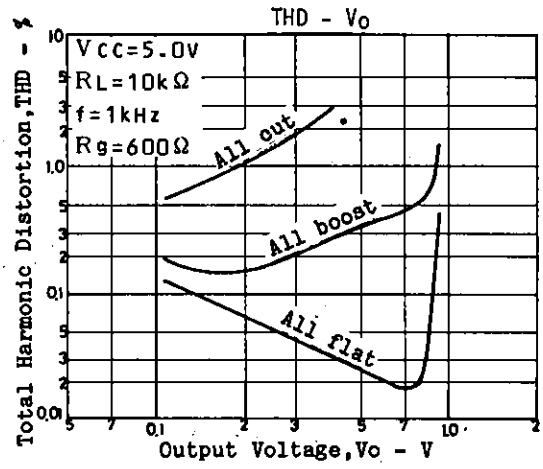
THD - Vo
Vcc=5.0V
RL=10kΩ
f=1kHz
Rg=600Ω
All cut
All boost
All flat
Total Harmonic Distortion,THD - %
Output Voltage,Vo - V

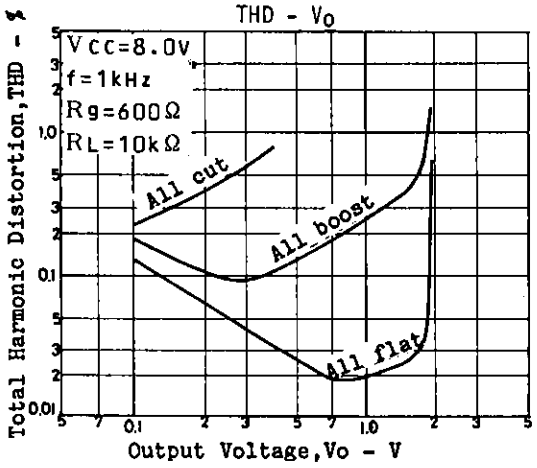
THD - Vo
Vcc=8.0V
f=1kHz
Rg=600Ω
RL=10kΩ
All cut
All boost
All flat
Total Harmonic Distortion,THD - %
Output Voltage,Vo - V

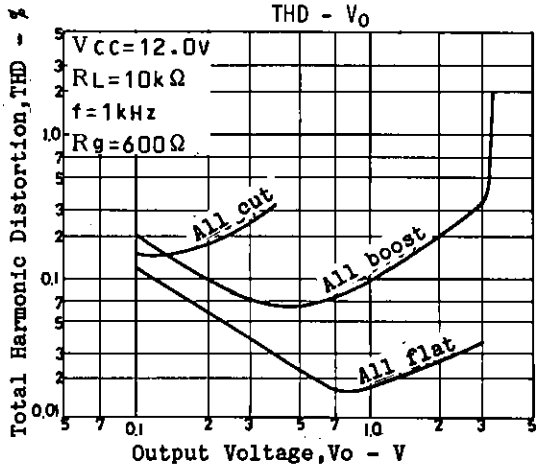
THD - Vo
Vcc=12.0V
RL=10kΩ
f=1kHz
Rg=600Ω
All cut
All boost
All flat
Total Harmonic Distortion,THD - %
Output Voltage,Vo - V

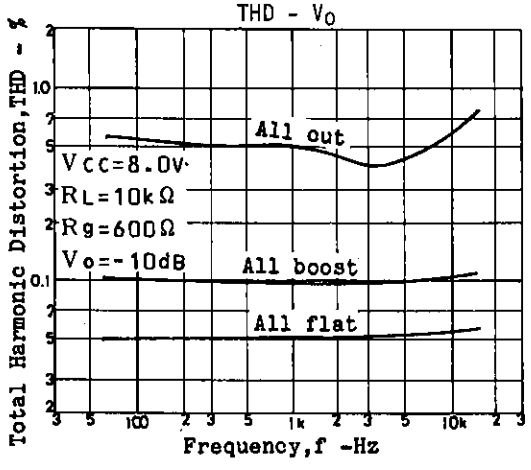
THD - Vo
All out
Vcc=8.0V
RL=10kΩ
Rg=600Ω
Vo=-10dB
All boost
All flat
Total Harmonic Distortion,THD - %
Frequency,f -Hz

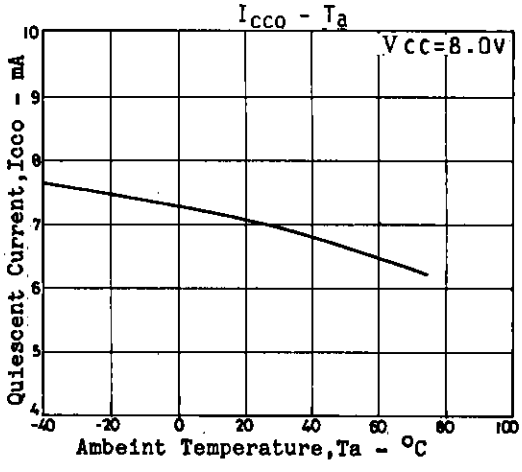
Icco - Ta
Vcc=8.0V
Quiescent Current,Icco - mA
Ambeint Temperature,Ta - °C

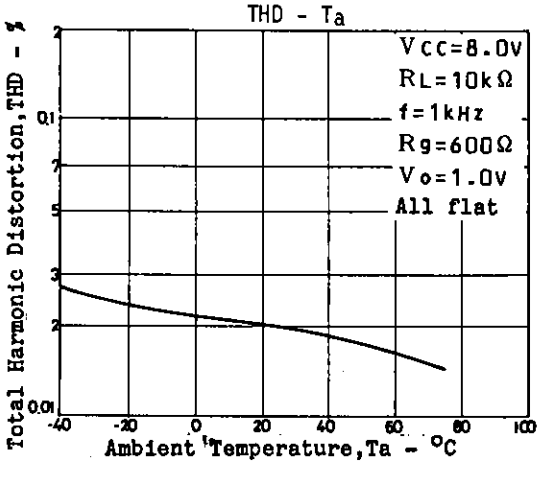
THD - Ta
Vcc=8.0V
RL=10kΩ
f=1kHz
Rg=600Ω
Vo=1.0V
All flat
Total Harmonic Distortion,THD - %
Ambient Temperature,Ta - °C

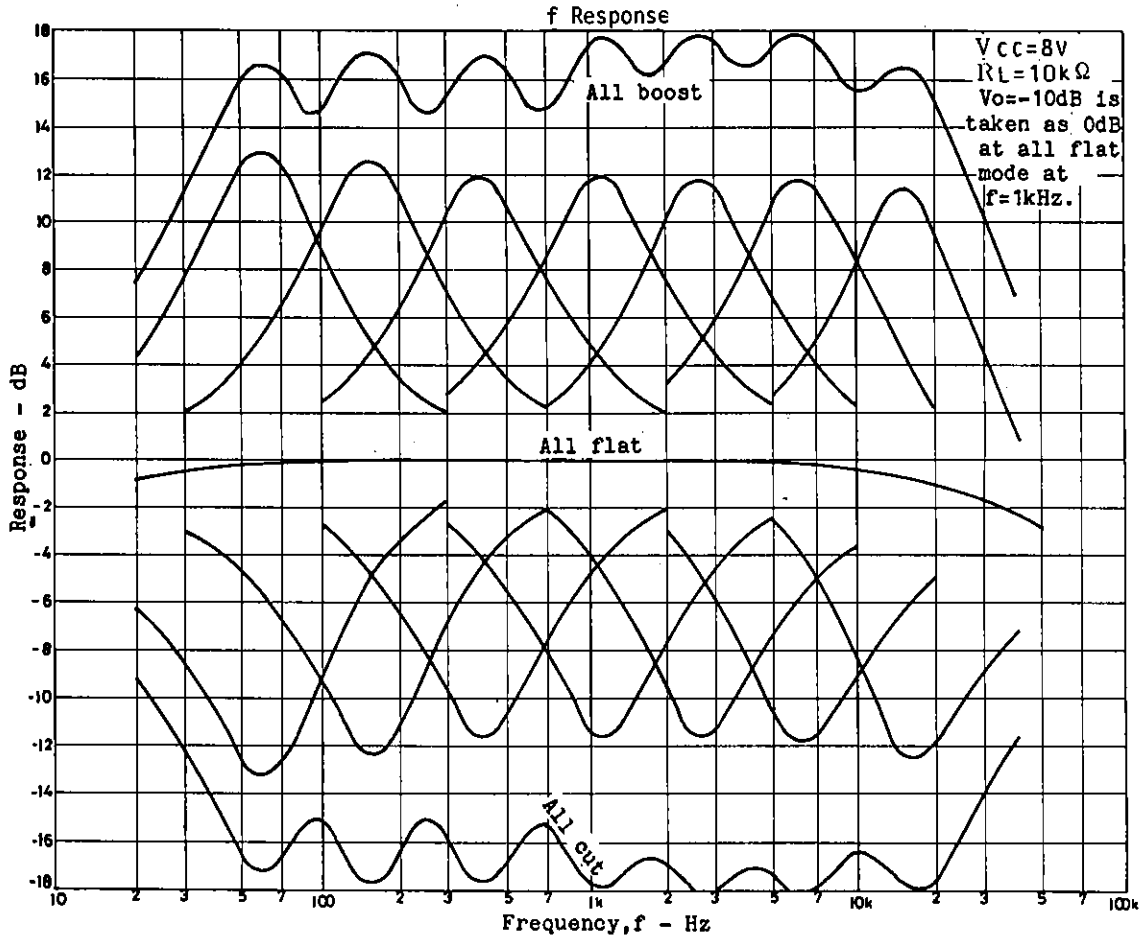

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:
① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.