Ordering number: EN 1187E

Monolithic Linear IC

SANYO No.1187E

LA5000 Series

2 to 5V 60mA Low Saturation Voltage Regulators

The LA5002, 5003, 5004, 5005 are voltage regulators having a small input-output voltage drop (0.2V typ.) They are especially suited for use in battery-powered low voltage equipment and commercial or industrial equipment having a large voltage regulation.

Features

- Small input-output voltage drop (0.2V/I_{OUT}=20mA typ.)
- Minimum number of external parts required
- Highly resistant against load short
- Radio noise (radiation) control pin

Maximum Ratings at Ta=25°C


				unit
Input Supply Voltage	V_{IN} max		12	V
Output Current	I_{OUT} max		60	mA
Allowable Power Dissipation	Pd max	Ta=80°C	560	mW
Operating Temperature	Topr		−20 to +80	°C
Storage Temperature	Tstg		−30 to +125	°C

Electrical Characteristics at Ta=25°C, C_{OUT}=10μF, I_{OUT}=20mA, V_{IN}=3V[LA5002], V_{IN}=4V [5003], V_{IN}=5V [LA5004], V_{IN}=6V [LA5005]

			min	typ	max	unit
Output Voltage	V_O	LA5002	1.85	2.0	2.15	V
		LA5003	2.8	3.0	3.2	V
		LA5004	3.75	4.0	4.25	V
		LA5005	4.75	5.0	5.25	V
Line Regulation	V_O line	LA5002: 2.5V<V_{IN}<8V			50	mV
		LA5003: 3.5V<V_{IN}<9V			50	mV
		LA5004: 4.5V<V_{IN}<10V			50	mV
		LA5005: 5.5V<V_{IN}<11V			50	mV
Load Regulation	V_O load	1mA<I_{OUT}<40mA			20	mV
		1mA<I_{OUT}<50mA			25	mV
Quiescent Current	I_{CCO}	LA5002		1.2	2.0	mA
		LA5003		1.4	2.0	mA
		LA5004		1.5	2.3	mA
		LA5005		1.7	2.5	mA

Continued on next page.

Package Dimensions 3027A-S4HTR
(unit: mm)

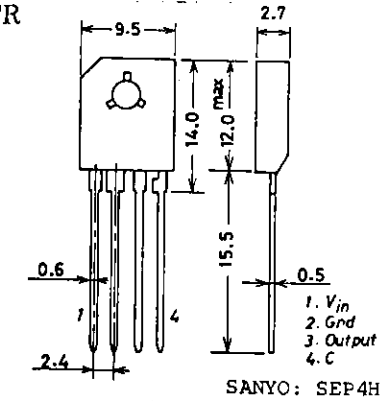


SANYO: SEP4H

Continued from preceding page.


			min	typ	max	unit
Ripple Voltage	R_r	LA5002,LA5004,LA5005: f=120Hz	40			dB
		LA5003: f=120Hz	43			dB
Input/Output Voltage Drop	V_{drop}			0.2	0.3	V
Coefficient of Output Voltage	$K\Delta v_o/\Delta T$		−1		+1	mV/°C
	V_N	10Hz<f<100kHz		30		μV

Equivalent Circuit Block Diagram

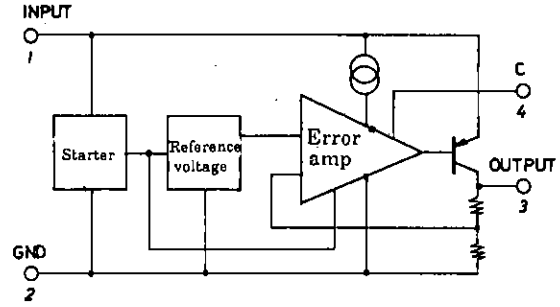

Sample Application Circuit


Unit (capacitance: F)

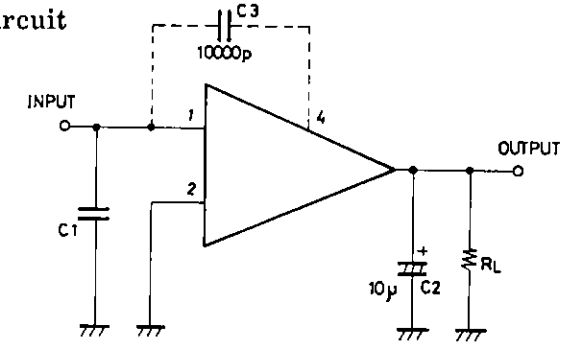


Note: Capacitor C3 is not required unless radio noise is a problem.

Test Circuits


• V_{OUT}, Line Reg.

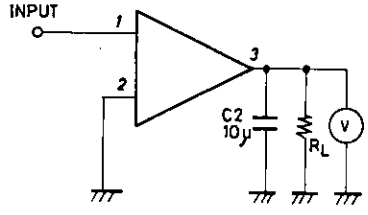


• Load Reg.

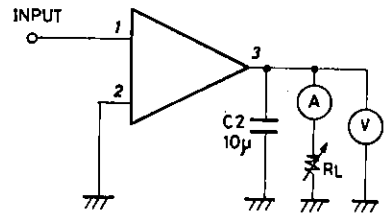

• ICC




• Ripple Rej.

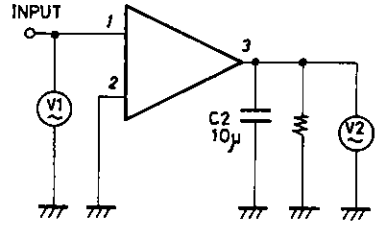


Ripple Rej = $\frac{V1}{V2}$

Unit (capacitance: F)


[LA5002] V_O - V_i

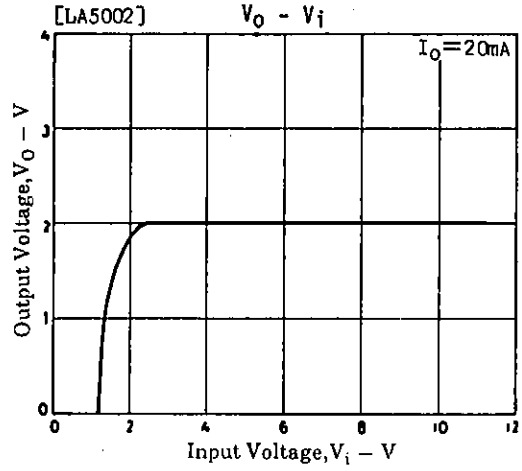


[LA5002] V_O - I_O

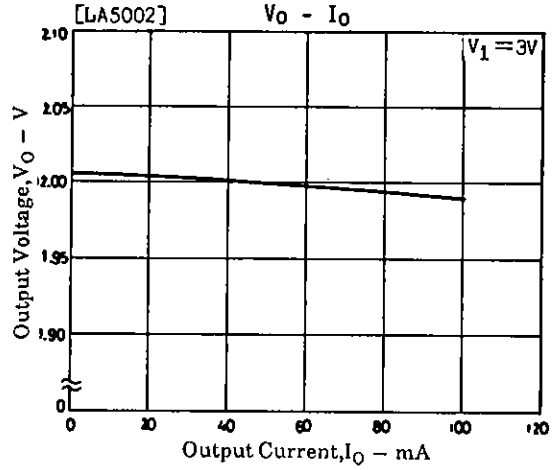


[LA5002] Ripple rej. - f

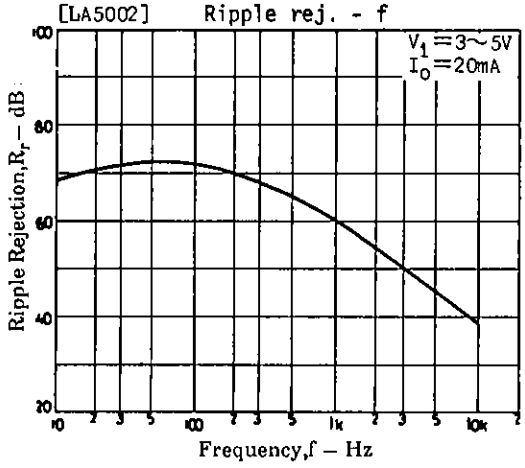


[LA5003] V_O - V_i

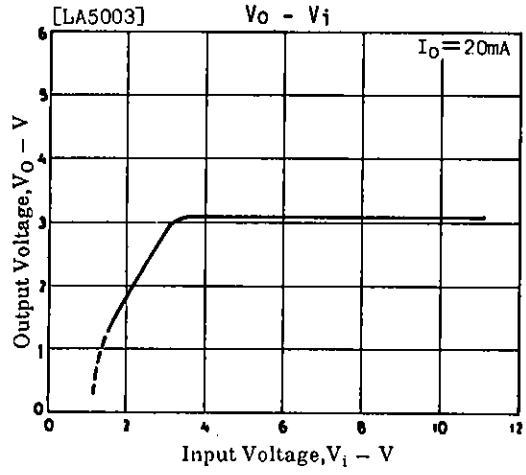


[LA5003] V_O - I_O

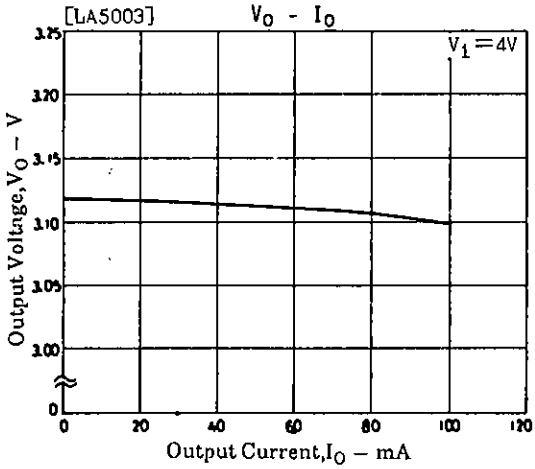


[LA5003] Ripple rej. - f

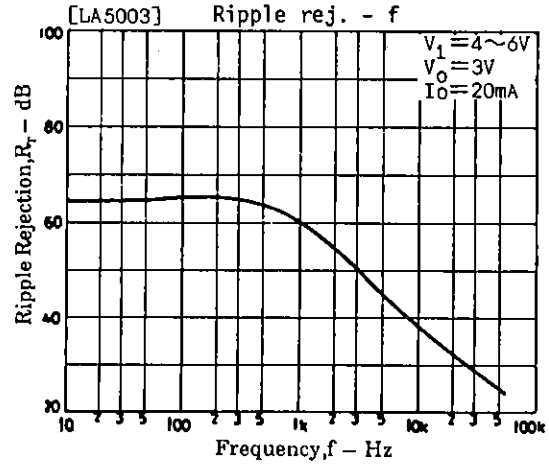



[LA5004] V_O - V_i

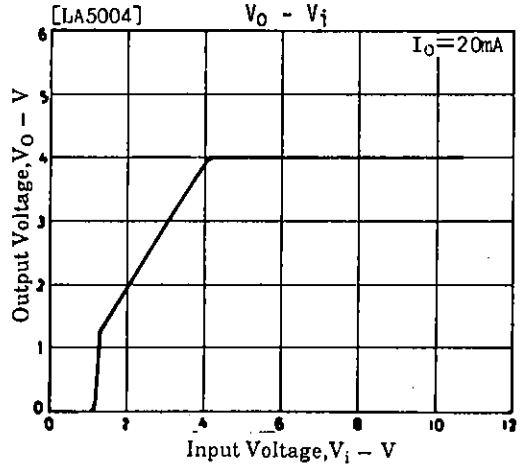



[LA5004] V_O - I_O

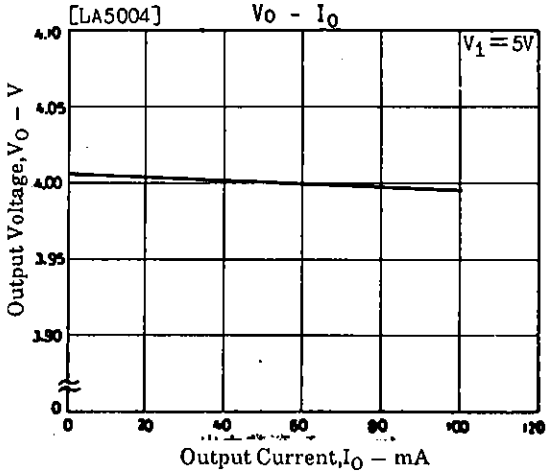


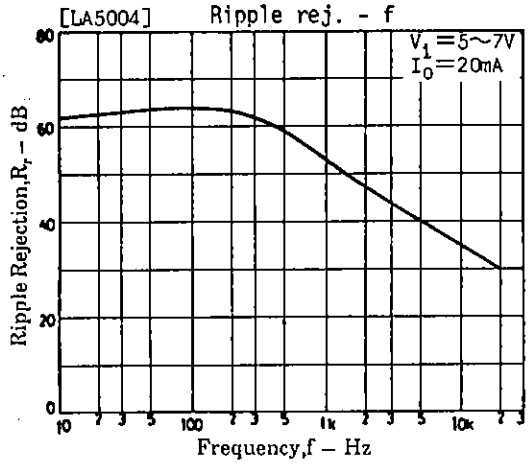


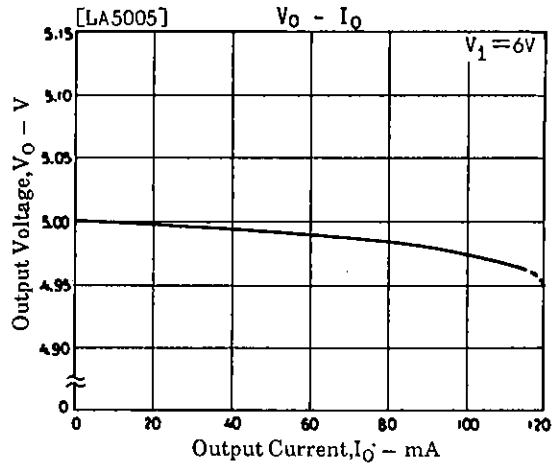

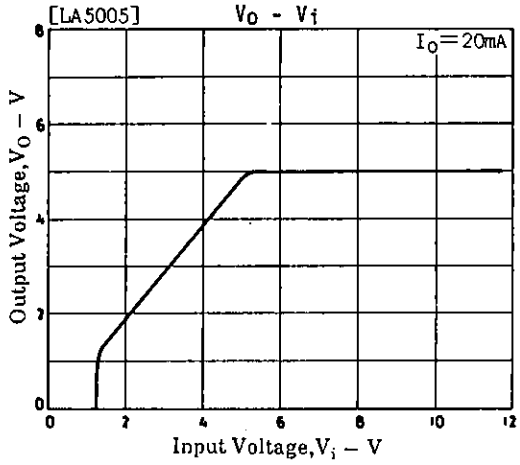

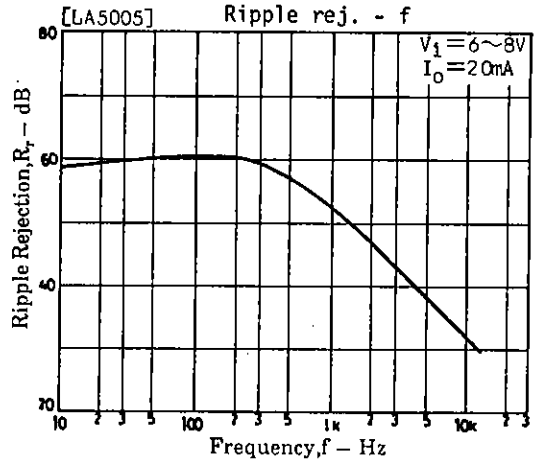

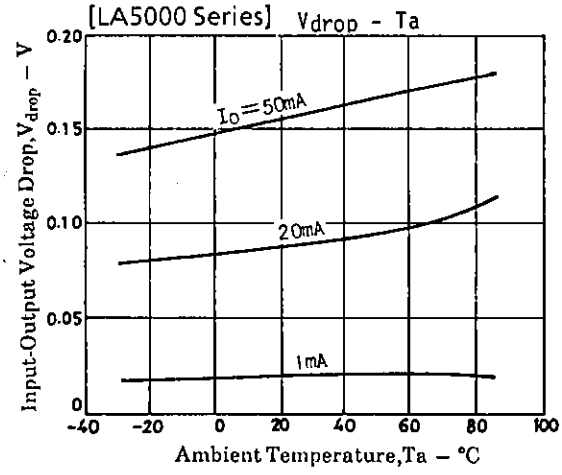

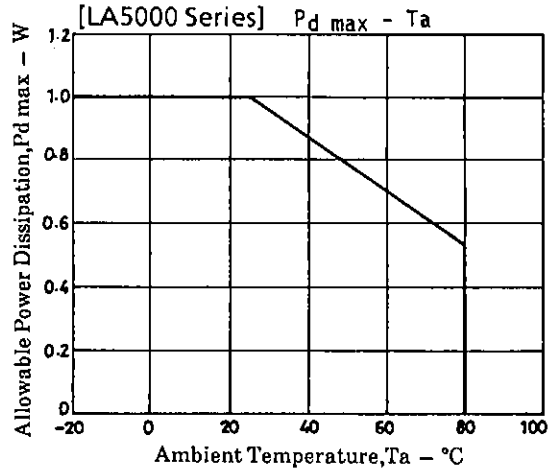

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:
① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.