100VAC Input/12VDC (350mA) Output

Non-Isolated AC/DC Converter

BP5067-12

●Absolute Maximum Ratings


Parameter	Symbol	Limits	Unit
Input voltage	Vi	190	V
Maximum output current	IOMAX	350	mApk
ESD endurance	Vsurge	2	kV
Operating temperature range	Topr	−20 to +80	°C
Storage temperature range	Tstg	−25 to +105	°C

●Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Input voltage	Vi	113	141	190	V	DC(80 to 135VAC)
Output voltage	Vo	11.0	12.0	13.0	V	Vi=141V, Io=350mA
Output current	Io	0	–	350	mA	Vi=141V ∗1
Line regulation	Vr	−0.30	0.05	0.30	V	Vi=113 to 190V, Io=350mA
Load regulation	Vl	−0.30	0.05	0.30	V	Vi=141V, Io=0 to 350mA ∗2
Output ripple voltage	Vp	–	0.07	0.15	Vp-p	Vi=141V, Io=350mA
Power conversion efficiency	η	70	80	–	%	Vi=141V, Io=350mA

∗1 Maximum output current varies depending on ambient temperature ; please refer to derating curve.
∗2 Please refer to Load regulation, Conversion efficiency.

●Application Circuit

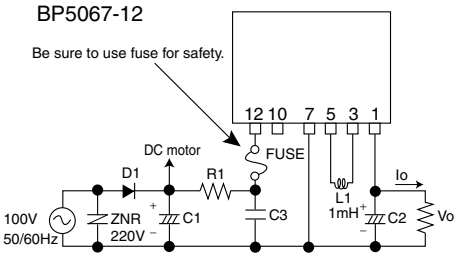


Pin No.	Function
1	Output terminal Vo(12V)
2	Skip
3	Choke coil connect
4	Skip
5	Choke coil connect
6	Skip
7	COMMON
8	Skip
9	Skip
10	N.C.
11	Skip
12	Input terminal Vi(141VDC)

Please verify operation and characteristics in the customer's circuit before actual usage.
Ensure that the load current does not exceed the maximum rating.


External Component Specifications

FUSE: Fuse	Use a quick-acting fuse of (1A)
C1: Input capacitor	above 200V, 33 to 220μF Ripple current 0.13Arms or above.
C2: Output capacitor	above 25V, 100 to 470μF, low impedance ESR : 0.4Ω Max. Ripple current 0.25Arms or above Capacitor impedance affects the output ripple voltage.
C3: Noise reduction capacitor	above 200V, 0.1 to 0.22μF Use a film or ceramic capacitor. Evaluate under actual conditions.
L1: Power inductor	Inductance : 1mH, Rating current : above 750mA Select a components that does not become magnetically saturated at high tempertures.
D1: Rectifier diode	Use a rectifying diode with a peak reverse voltage of 400V or higher, an average rectification current of 0.5A or larger and a peak surge current of 20A or larger. When using a large capacitance input capacitor, select a component strong against inrush current during power up. Full-wave rectification can be used.
R1: Noise reduction resistor	10 to 22Ω, 1/4W The ideal value can be determined through actual testing.
ZNR: Varistor	A varistor must be used to protect against lightning surges and static electricity.


●Dimensions (Unit : mm)

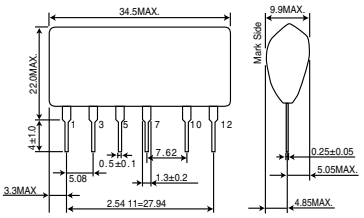


●Derating Curve




●Conversion Efficiency



●Load Regulation



●Surface Temperature Increase



©2010 ROHM Co., Ltd. All rights reserved.

Power Module Usage Precautions

Safety Precautions

1) The products are designed and manufactured for use in ordinary electronic equipment (i.e. AV/OA/ telecommunication/amusement equipment, home appliances). Please consult with the Company's (ROHM) sales staff if intended for use in devices requiring high reliability (e.g. medical/transport/ aircraft/spacecraft equipment, nuclear power/fuel controllers, automotive/safety devices) and whose malfunction may result in injury or death. In this case, failsafe measures must be taken, including the following:
   [a] Installation of protection circuits in order to improve system safety
   [b] Incorporation of redundant circuits in the case of single-circuit failure
2) The products are designed for use under normal conditions. Application in special environments can cause a deterioration in product performance. Therefore, verification and confirmation of product performance, prior to use, is recommended. The following environments are considered to be 'special':
   [a] Outdoors, exposed to direct sunlight or dust
   [b] In contact with liquids, such as water, oils, chemicals, or organic solvents
   [c] In areas where exposure to the sea air or corrosive gases (i.e. Cl_2, H_2S, NH_3, SO_2, NO_2) can occur
   [d] In places where the products may be in contact with static electricity or electromagnetic waves
   [e] In proximity to heat-producing items, plastic cords, or flammable materials
   [f] In contact with sealing or coating products, such as resin
   [g] In contact with unclean solder or exposed to water or water-soluble cleaning agents used after soldering
   [h] In areas where dew condensation occurs
3) The products are not designed to be radiation resistant
4) The Company is not responsible for any problems resulting from use of the products under conditions not recommended herein.
5) The Company should be notified of any product safety issues. Moreover, product safety issues should be periodically monitored by the customer.

Application Notes

1) A sufficient margin must be allowed if changes are made to the peripheral circuit due to variations in the inherent tolerances of the external components as well as transient and static characteristics. In addition, please be aware that the Company has not conducted investigations on whether or not particular changes in the example application circuits would result in patent infringement.
2) The application examples, their constants, and other types of information contained herein are applicable only when the products are used in accordance with standard methods.
   Therefore, if mass production is intended, sufficient consideration to external conditions must be made.

Notes Regarding Industrial Property

1) The specifications included herein contain information related to the Company's industrial property. Their use other than pertaining to the relevant products is forbidden. Duplication and/or disclosure to a third party without express written permission is strictly prohibited.
2) Product information and data, including application examples, contained in the specifications are for reference purposes only; the Company does not guarantee the industrial/intellectual property rights or any other rights of a third party. Accordingly, the Company shall not bear responsibility for:
   [a] Infringement of the intellectual property rights of a third party
   [b] Problems arising from the use of the products listed herein
3) The Company prohibits the purchaser from exercising or using the intellectual/industrial property rights or any rights belonging to or are controlled by the Company, other than the right to use, sell, or dispose of the products.

Power Module Usage Precautions

Safety Precautions

1) The products are designed and manufactured for use in ordinary electronic equipment (i.e. AV/OA/ telecommunication/amusement equipment, home appliances). Please consult with the Company's (ROHM) sales staff if intended for use in devices requiring high reliability (e.g. medical/transport/ aircraft/spacecraft equipment, nuclear power/fuel controllers, automotive/safety devices) and whose malfunction may result in injury or death. In this case, failsafe measures must be taken, including the following:
   [a] Installation of protection circuits in order to improve system safety
   [b] Incorporation of redundant circuits in the case of single-circuit failure
2) The products are designed for use under normal conditions. Application in special environments can cause a deterioration in product performance. Therefore, verification and confirmation of product performance, prior to use, is recommended. The following environments are considered to be 'special':
   [a] Outdoors, exposed to direct sunlight or dust
   [b] In contact with liquids, such as water, oils, chemicals, or organic solvents
   [c] In areas where exposure to the sea air or corrosive gases (i.e. Cl_2, H_2S, NH_3, SO_2, NO_2) can occur
   [d] In places where the products may be in contact with static electricity or electromagnetic waves
   [e] In proximity to heat-producing items, plastic cords, or flammable materials
   [f] In contact with sealing or coating products, such as resin
   [g] In contact with unclean solder or exposed to water or water-soluble cleaning agents used after soldering
   [h] In areas where dew condensation occurs
3) The products are not designed to be radiation resistant
4) The Company is not responsible for any problems resulting from use of the products under conditions not recommended herein.
5) The Company should be notified of any product safety issues. Moreover, product safety issues should be periodically monitored by the customer.

Application Notes

1) A sufficient margin must be allowed if changes are made to the peripheral circuit due to variations in the inherent tolerances of the external components as well as transient and static characteristics. In addition, please be aware that the Company has not conducted investigations on whether or not particular changes in the example application circuits would result in patent infringement.
2) The application examples, their constants, and other types of information contained herein are applicable only when the products are used in accordance with standard methods.
   Therefore, if mass production is intended, sufficient consideration to external conditions must be made.

Notes Regarding Industrial Property

1) The specifications included herein contain information related to the Company's industrial property. Their use other than pertaining to the relevant products is forbidden. Duplication and/or disclosure to a third party without express written permission is strictly prohibited.
2) Product information and data, including application examples, contained in the specifications are for reference purposes only; the Company does not guarantee the industrial/intellectual property rights or any other rights of a third party. Accordingly, the Company shall not bear responsibility for:
   [a] Infringement of the intellectual property rights of a third party
   [b] Problems arising from the use of the products listed herein
3) The Company prohibits the purchaser from exercising or using the intellectual/industrial property rights or any rights belonging to or are controlled by the Company, other than the right to use, sell, or dispose of the products.

Notes

No copying or reproduction of this document, in part or in whole, is permitted without the consent of ROHM Co.,Ltd.

The content specified herein is subject to change for improvement without notice.

The content specified herein is for the purpose of introducing ROHM's products (hereinafter "Products"). If you wish to use any such Product, please be sure to refer to the specifications, which can be obtained from ROHM upon request.

Examples of application circuits, circuit constants and any other information contained herein illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

Great care was taken in ensuring the accuracy of the information specified in this document. However, should you incur any damage arising from any inaccuracy or misprint of such information, ROHM shall bear no responsibility for such damage.

The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM and other parties. ROHM shall bear no responsibility whatsoever for any dispute arising from the use of such technical information.

The Products specified in this document are intended to be used with general-use electronic equipment or devices (such as audio visual equipment, office-automation equipment, communication devices, electronic appliances and amusement devices).

The Products specified in this document are not designed to be radiation tolerant.

While ROHM always makes efforts to enhance the quality and reliability of its Products, a Product may fail or malfunction for a variety of reasons.

Please be sure to implement in your equipment using the Products safety measures to guard against the possibility of physical injury, fire or any other damage caused in the event of the failure of any Product, such as derating, redundancy, fire control and fail-safe designs. ROHM shall bear no responsibility whatsoever for your use of any Product outside of the prescribed scope or not in accordance with the instruction manual.

The Products are not designed or manufactured to be used with any equipment, device or system which requires an extremely high level of reliability the failure or malfunction of which may result in a direct threat to human life or create a risk of human injury (such as a medical instrument, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel-controller or other safety device). ROHM shall bear no responsibility in any way for use of any of the Products for the above special purposes. If a Product is intended to be used for any such special purpose, please contact a ROHM sales representative before purchasing.

If you intend to export or ship overseas any Product or technology specified herein that may be controlled under the Foreign Exchange and the Foreign Trade Law, you will be required to obtain a license or permit under the Law.

ROHM SEMICONDUCTOR

Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

http://www.rohm.com/contact/

© 2010 ROHM Co., Ltd. All rights reserved.