D20JA05 THRU D20JA100


RoHS COMPLIANT

桥式整流器 Bridge Rectifier

■特征 Features

- I_o 20A
- V_{RRM} 50V~1000V
- 玻璃钝化芯片
  Glass passivated chip
- 耐正向浪涌电流能力高
  High surge forward current capability

■外形尺寸 Outline Dimensions and Mark

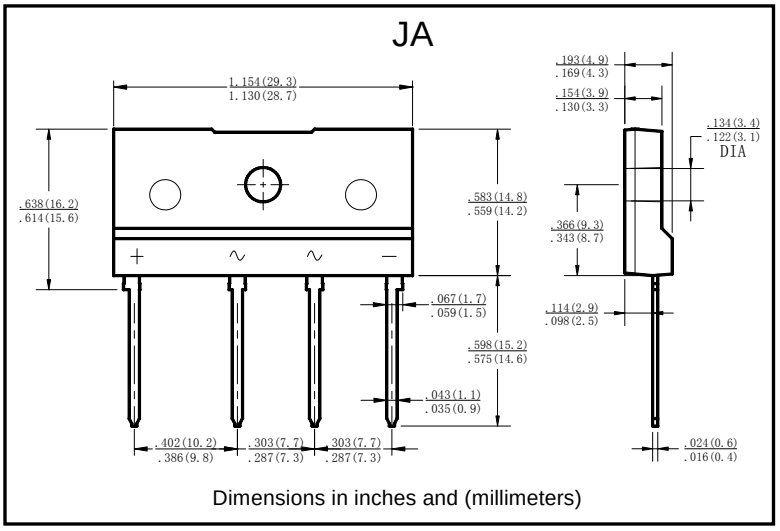

Dimensions in inches and (millimeters)

■用途 Applications

- 作一般电源单相桥式整流用
  General purpose 1 phase Bridge rectifier applications

■极限值（绝对最大额定值）

Limiting Values（Absolute Maximum Rating）

参数名称 Item	符号 Symbol	单位 Unit	条件 Conditions		D20JA						
					05	10	20	40	60	80	100
反向重复峰值电压 Repetitive Peak Reverse Voltage	V_{RRM}	V			50	100	200	400	600	800	1000
平均整流输出电流 Average Rectified Output Current	I_O	A	60Hz正弦波，电阻负载 60Hz sine wave, R-load	用散热片 T_c =90℃ With heatsink T_c =90℃	20						
				无散热片 T_a =25℃ Without heatsink T_a =25℃	3.3						
正向（不重复）浪涌电流 Surge(Non-repetitive)Forward Current	I_{FSM}	A	60Hz正弦波，一个周期，T_j=25℃ 60Hz sine wave, 1 cycle, T_j=25℃		240						
正向浪涌电流的平方对电流浪涌持续时间的积分值 Current Squared Time	I^2t	A^2S	1ms≤t<8.3ms Tj=25℃，单个二极管 1ms≤t<8.3ms Tj=25℃，Rating of per diode		240						
存储温度 Storage Temperature	T_{stg}	℃			-55 ~+150						
结温 Junction Temperature	T_j	℃			-55 ~+150						
绝缘耐压 Dielectric Strength	V_{dis}	KV	端子与外壳之间外加交流电，一分钟 Terminals to case，AC 1 minute		2.5						
安装扭矩 Mounting Torque	Tor	kg • cm	推荐值：5kg • cm Recommend torque：5kg • cm		8						

■电特性 （T_a=25℃ 除非另有规定）

Electrical Characteristics（T_a=25℃ Unless otherwise specified）

参数名称 Item	符号 Symbol	单位 Unit	测试条件 Test Condition	最大值 Max
正向峰值电压 Peak Forward Voltage	V_{FM}	V	I_{FM}=10A，脉冲测试，单个二极管的额定值 I_{FM}=10A, Pulse measurement, Rating of per diode	1.1
反向峰值电流 Peak Reverse Current	I_{RRM}	μA	V_{RM}=V_{RRM}，脉冲测试，单个二极管的额定值 V_{RM}=V_{RRM} , Pulse measurement, Rating of per diode	10
热阻 Thermal Resistance	$R_{\theta J-A}$	℃/W	结和环境之间，无散热片 Between junction and ambient, Without heatsink	22
	$R_{\theta J-C}$		结和管壳之间，用散热片 Between junction and case, With heatsink	1.5

■特性曲线（典型） Characteristics(Typical)

图1：Io-Tc曲线
FIG1:Io-Tc Curve

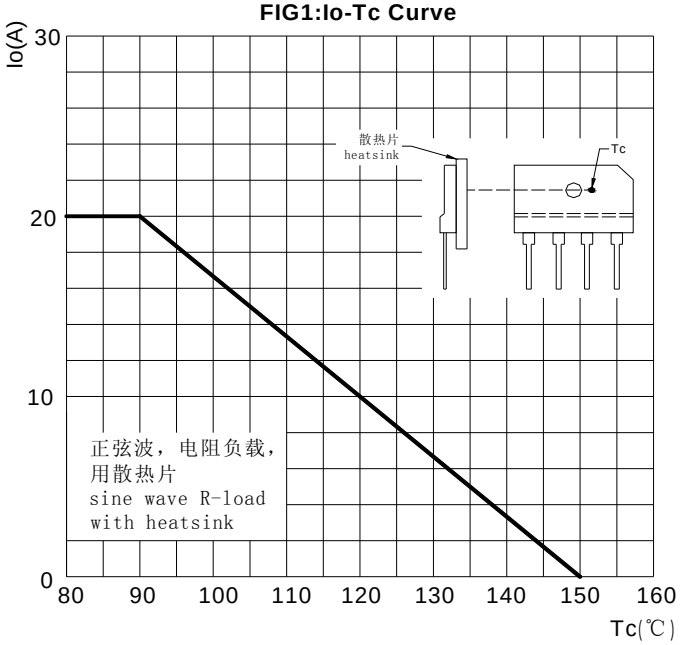


图2：耐正向浪涌电流曲线
FIG2:Surge Forward Current Capadility

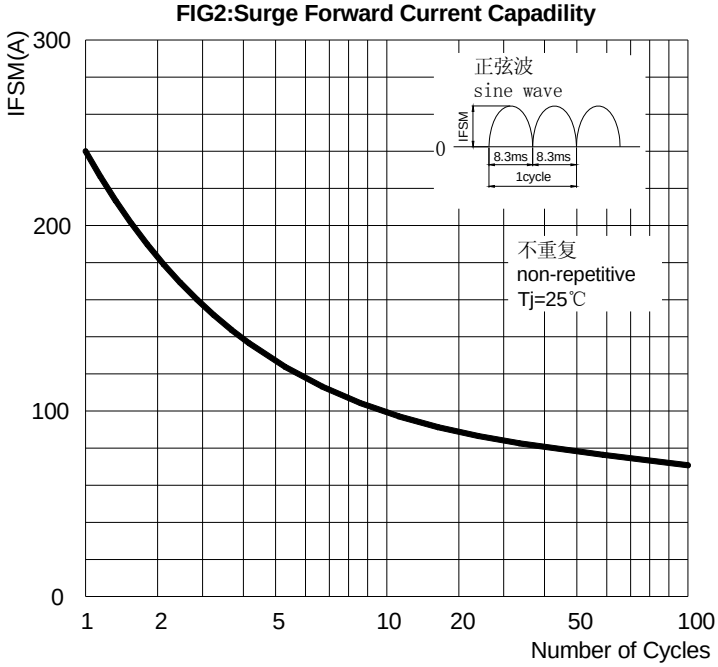


图3：正向电压曲线
FIG3: Forward Voltage

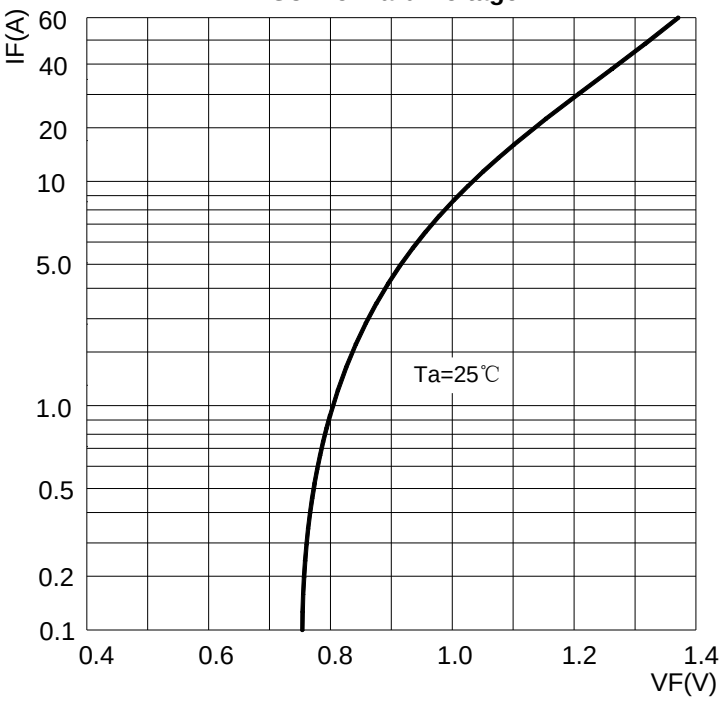


图4：反向电流曲线
FIG4:Typical Reverse Characteristics

