CASE FINISH	CURRENT (AMPS)	WORKING VOLTAGE				MAXIMUM DC RESISTANCE (OHMS)	MAXIMUM VOLTAGE DROP		MINIMUM CAPACITANCE (uF)	MIN. INSERTION LOSS PER MIL-STD-220 FULL LOAD, +25°C													
		-55°C TO +85°C		-55°C TO +125°C						14 KHz	30 KHz	50 KHz	75 KHz	100 KHz	150 KHz	300 KHz	500 KHz	1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
		AC	DC	AC	DC		DC	AC														
SOLDER	10	---	80	----	50	0.005	0.050	---	2.8	--	21	--	--	31	35	40	--	35	70	70	70	--

PART MARKING:

9001-100-1081
SCI DATE CODE

PACKAGE MARKING:

STANDARD

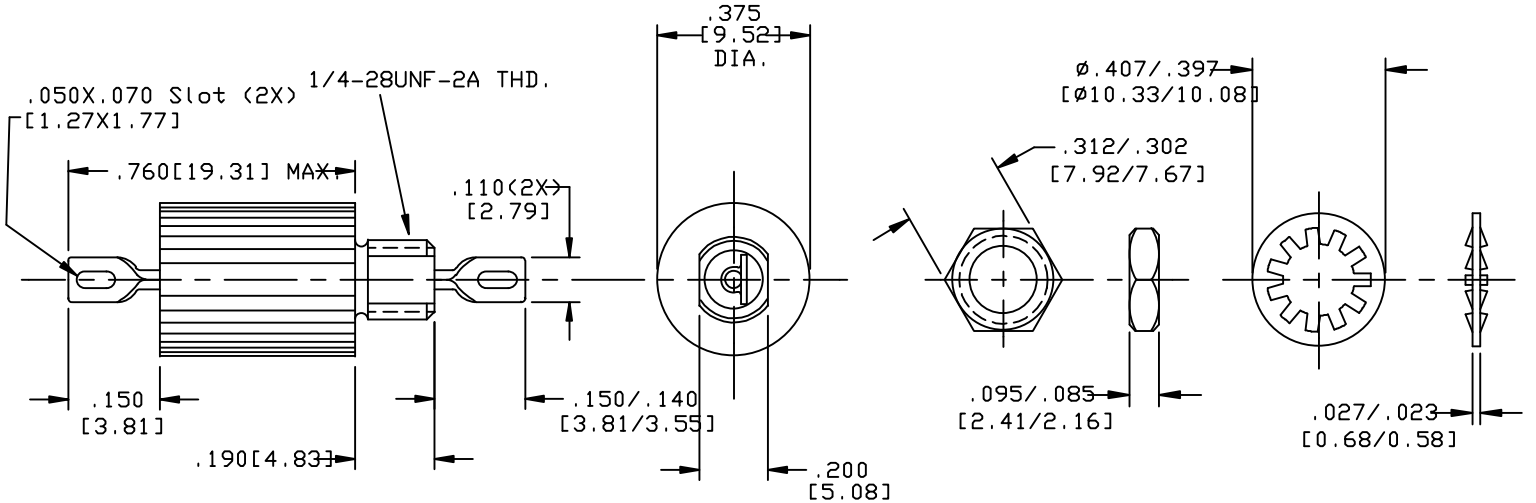

MARKING NOTES:

N/A

SCHEMATIC



MTG. HARDWARE

NOTES:

1) MOUNTING TORQUE NOT TO EXCEED 7in-lbs.

CN. 171898	04	CHANGE NOTICE	REV. NO.	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. [MILLIMETERS] DO NOT SCALE.	TOLERANCES UNLESS OTHERWISE SPECIFIED Fractions Dec. .xx± Dec. .xxx±010 Angles ±0° 30' CODE IDENT. NO. 0LSP2	SPECTRUM CONTROL INC. ERIE, FAIRVIEW PENNSYLVANIA	Dwn KAUFFMAN Ckd 2-27-96 Apvd. Sheet 1 of 1 Description Low Pass EMI Filter 9001-100-1081

Quality Products From The Specialists In Electro-Magnetic Compatibility